



OUTDOOR STORAGE

MODEL N° 6415

***OWNER'S MANUAL***

COPY

Keep this Identification Number in case you must contact our Customer Service Department.

## **IMPORTANT! PLEASE READ BEFORE BEGINNING ASSEMBLY**

Dear Valued Customer,

We would like to congratulate you on your purchase of a Lifetime® Outdoor Storage Shed! We are confident that you have made the perfect choice and you will be very pleased with your new storage solution.

Lifetime® Outdoor Storage is part of the family of products created and manufactured by Lifetime® Products, Inc. Like all of our products, you can be assured that the quality of your Lifetime Outdoor Storage Shed is the best in the world! And, we back that quality up by offering the best warranty in the business – A 10-year warranty that fully covers the Shed!

All of our Sheds are built with the highest-quality steel and high-density polyethylene (HDPE) parts. The design and construction of our steel-reinforced double-Wall Panels is second to none. All of our exposed steel parts and gables are powder coated and we use high-density polyethylene plastic. What makes polyethylene so special? It has superior strength and durability, and, it won't crack or degrade outdoors.

So now that you know the quality you are getting in a Lifetime Outdoor Storage Shed, please take the time to READ THIS INSTRUCTION MANUAL!

We have taken great care in providing the best possible form of instructions to help you put your new Outdoor Storage Shed together. Before you get started, PLEASE read the following preparation tips to help you get started!

We can assure you, your construction experience will be a lot more enjoyable if you do!

### **PREPARATION TIPS:**

- The first step is simple... RELAX! You have made a great purchase, but Rome was not built in a day. Plan to spend a good part of your weekend putting together your fine Outdoor Storage Shed. Our philosophy is, if it comes together quickly and easily, it surely will come apart quickly and easily! Your Lifetime® Outdoor Storage Shed will surely last a long, long time, if you are patient, and take all the time necessary to put it together as we have instructed.
- Grab a friend to join in on the fun! This is not a one-person endeavor. We have found that not only will things go smoother if you have two or more people participating in the construction of the Shed, but it will go quicker as well. So, the more the merrier!
- Make sure you have all the tools necessary for constructing your new Shed. There is a "Tools Required For This Assembly" list on page five of this Owner's Manual.
- The plastic pieces of your Shed may become damaged by over tightening the screws. To avoid this damage, we strongly recommend the use of a low-powered power screwdriver or a drill that has an adjustable clutch that is set on a low-torque setting. If neither is available, use a hand screwdriver. If a hand screwdriver is all you have, take several breaks... your wrist will need it!
- You will also need two small ladders (when it comes time to do the roof!).



## **IMPORTANT! PLEASE READ BEFORE BEGINNING ASSEMBLY**

- Before beginning assembly, remove the Parts List from the center of this Owner's Manual and take an inventory of the parts included with your Outdoor Storage Shed. Also, read through the entire instruction manual. It's always a great practice to get a feel for the flow of the process and to familiarize yourself with the parts involved. But, try not to get ahead of yourself and start the process out of order.
- **FOLLOW THE INSTRUCTIONS IN ORDER!** Everything goes together in a certain order, and we have learned what that correct order should be. In our state-of-the-art research and testing facility, we have painstakingly created these instructions. The order of construction is there for a reason, and some parts simply will not fit if built out of order. Just follow along with the order in the instructions and everything will fit together and things will go very smooth.
- **YOUR SHED MUST BE BUILT ON A LEVEL SURFACE!** If the spot you have chosen to place your wonderful new Outdoor Storage Shed is not level, the Shed will not assemble correctly! We recommend a concrete patio, a wood platform or creating a pad with pea gravel. Your Shed is meant to last a lifetime, so provide the proper foundation for it before you start to build.
- Before you build it, make sure you are allowed to build it! Consult all building codes, as well as city and county ordinances, to ensure that you do not require a building permit to construct your Outdoor Storage Shed. Proper building permit documentation may be required in your neighborhood, and it would be quite unfortunate to learn this after your Outdoor Storage Shed is already built!

Now that you're ready to begin the construction of your wonderful new Outdoor Storage Shed, step back, take a deep breath, get yourself a large cold beverage and enjoy yourself. We guarantee that after spending the right amount of time in building your Shed, you will be able to enjoy it for years to come.

Thanks for choosing Lifetime®, and have fun!

## **ABOUT LIFETIME PRODUCTS, INC.**

Lifetime Products, Inc., has applied innovation and cutting-edge technology in plastics and metals to create a family of affordable lifestyle products that feature superior strength and durability. The world's leading manufacturer of folding tables and chairs, Lifetime was founded in 1986 as the maker of portable basketball systems that revolutionized the industry with patented technology. With diverse offerings such as outdoor storage sheds and steel utility trailers, Lifetime continues to develop innovative products that outfit the way you live.

Lifetime makes the things you need for the lifestyle you want. By innovating products in and around the home, Lifetime simplifies your everyday life and enables you to get the most out of your free time.



## REGISTER YOUR LIFETIME PRODUCT TODAY!

There are benefits to registering your Lifetime product. With our new online product registration form, it's fast and easy! Register with us at [www.lifetime.com](http://www.lifetime.com) and enjoy these great benefits:

- Receive exclusive money-saving offers from BuyLifetime.com, our online store, as well as NEW product notifications and special closeout promotions!
- In the unlikely event of a product recall or safety modification, we will notify you.
- Registering your product guarantees you warranty service. If you do not register your product, your warranty rights will not be diminished. But you will need to provide a sales receipt to verify your product purchase date before warranty service will be provided.

### LIFETIME'S PROMISE TO YOU:

*Maintaining your privacy is our long-standing policy at Lifetime. And you can rest assured that Lifetime will not sell or provide your personal data to other third parties, or allow them to use your personal data for their own purposes.*

We invite you to read our privacy policy at [www.lifetime.com](http://www.lifetime.com)

**REGISTER today!**

### **\*\*U.S. and Canada customers ONLY\*\***

IF ASSISTANCE IS NEEDED,

## **DO NOT CONTACT THE STORE!**

**CALL OUR CUSTOMER SERVICE DEPARTMENT at 1 (800) 225-3865**

HOURS: 7:00 a.m. to 5:00 p.m. Monday through Friday (Mountain Standard Time)

\*\*Call, or visit our Web site for Saturday hours\*\*

\*\*For customers outside the U.S. or Canada, please contact the store for assistance.\*\*



## SAFETY INSTRUCTIONS



### **FAILURE TO FOLLOW THESE WARNINGS MAY RESULT IN SERIOUS INJURY OR PROPERTY DAMAGE AND WILL VOID WARRANTY.**

To ensure safety, do not attempt to assemble this product without following the instructions carefully. Check entire box and inside all packing material for parts and/or additional instruction material. Before beginning assembly, read the instructions and identify parts using the hardware identifier and parts list in this document. Proper and complete assembly, use and supervision are essential to reduce the risk of accident or injury.

- Do not use or store hot objects such as grills, blowtorches, welding equipment, etc. near the product.
- If using a ladder during assembly, use extreme caution.
- Two capable adults are required for assembly. (It is also recommended that a third adult function as an instruction reader.)

*Most injuries are caused by misuse and/or not following instructions. Use caution when using this product.*


## BEFORE BEGINNING ASSEMBLY



Keep the hardware bags and their contents separate. If any parts are missing, call our Customer Service Department.



Read the "Congratulations" letter on page 2-3. Identify and inventory all parts and hardware using the parts and hardware lists and identifiers in this document.

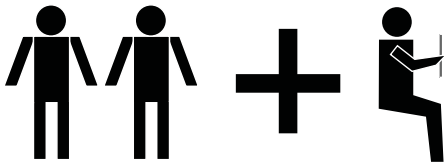

***\*Two adults required to complete assembly\****  
(+ one adult suggested as an instruction reader)

**Only adults should set up the product. Do not allow children in the set-up area until assembly is complete.**



## TOOLS REQUIRED FOR ASSEMBLY

7/16"




(2)

3/8"




(1)

Adjustable



(1)

Rubber Mallet



(1)

Box Knife



(1)

Phillips  
Screwdriver



(1)

3/8" Masonry  
Bit



(1)

2" x 4" x 11'  
Leveling Board




(1)

6' Ladder




(2)

Power Drill\*



(1)

Work Light



(1)

Pliers




(1)

Flashlight



(1)

Hammer Drill\*



(1)

Safety Glasses



(1 for each person)

\*See "Screwdriver Notice" on page 7.

## ASSEMBLY GUIDES

*Refer to the following areas throughout the instructions to assist in the assembly process:*

This area is located at the top, left-hand corner of the page and indicates which tools and hardware are needed to complete the assembly steps on a page.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



This area is located at the top, right-hand corner of the page and shows an image of the product with shaded parts indicating which section is being assembled.

SEC #

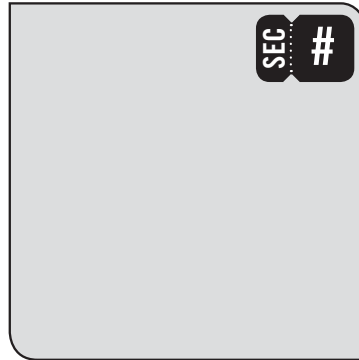

This area is usually located in the bottom, left-hand corner of a step and indicates that special attention is needed to perform a particular part of a step.



Note:



These areas are usually located in the bottom, right-hand corner of a step and indicate that damage to the product or serious injury may occur if the caution or warning is not heeded.



**CAUTION**



**WARNING**

## IMPORTANT NOTICES

### Level Surface Notice:

Surface must be leveled before installation. We recommend building a level work space with a concrete or patio style surface. If the surface is not properly leveled, the Outdoor Shed will not assemble correctly. Proper surface leveling will save you time in the long run, so please do not ignore this step.

---

### Building Code Notice:

Consult all local building codes, as well as city and county ordinances, to ensure that the construction of the Outdoor Shed does not require a building permit. Proper building permit documentation may be required in your neighborhood, and it would be unfortunate to learn this after constructing the Shed.

---

### Screwdriver Notice:

You may use a #2 Phillips head screwdriver bit and a power screwdriver or drill, instead of a hand screwdriver. However, be aware that the plastic pieces of your Shed can be damaged by overtightening of screws. To avoid damage we strongly recommend the use of a low-powered power screwdriver or a drill that has an adjustable clutch that is set on a low torque setting. If neither is available, use a hand screwdriver. In any case use caution to avoid overtightening the screws.

---

### Floor Puncture Notice:

Sharp objects may damage your floor. If resting sharp, heavy objects on your Shed floor, place a block of wood between the sharp object and floor.



### CAUTION:

If more than six (6) inches of snow accumulate on the roof of the shed, carefully remove the snow to avoid possible roof collapse. While standing on the ground, remove the snow from the roof with a broom or snow shovel. Do not stand on the roof to remove snow.

*Snow Load Kit available from Customer Service for high snow areas.*

## PARTS & HARDWARE LIST

### BOX 1

ID	Description	Qty
<b>BUA METAL PARTS KIT</b>		
AFQ	Wall Support Channel	8
AFO	Truss Brace Channel	1
AFC	Door End Channel	2
AFR	Corner Channel	4
AFD	Door Header Channel	1
AFH	Truss Gutter Channel	2
AFP	Truss Support Strip	2
AFJ	Long Wall Support Channel Extension	2
AFN	Short Wall Support Channel Extension	4
<b>BTI DOOR HINGE PARTS KIT</b>		
AFK	Right Hinge Assembly	1
AFI	Left Hinge Assembly	1
<b>PLASTIC &amp; MISCELLANEOUS PARTS</b>		
AFS	10" x 30" Shelf	5
AGU	Outer Roof Panel "A"	2
AGV	Outer Roof Panel "B"	2
AFT	14" x 30" Shelf	2
AGH	Gable Half 1	2
AGI	Gable Half 2	2
AGS	Outer Floor Panel "A"	2
AGT	Outer Floor Panel "B"	2
AGE	End Roof Cap	2
AFF	Gable Truss Brace	2
AFB	Door Brace	6
<b>BTH BOX 1 SHED PARTS BOX</b>		
AFU	Pegboard Strip	2
AIZ	14" Shelf Bracket	4
AHA	Roof Cap Cover	2
<b>BKB Left Door Assembly Hardware</b>		
AHZ	Left Door Handle	1
AHM	Dead Bolt Latch	2
AIA	Left Door Lock Bracket	1
AIB	Left Door Strike Plate	1
ADZ	1/4" x 5/8" Pan-Head Screw	9
ADX	#10 x 1/2" Pan-Head Screw	3
AEE	#10 x 1/2" Flat Washer	3
ACH	1/4" x 1 1/2" Carriage Bolt	2
ADJ	1/4" Cap Nut	2
<b>BKC Right Door Assembly Hardware</b>		
AIK	Right Door Handle	1
AIO	Thumb Lever	1
AHV	Door Latch	1
AIL	Right Door Lock Bracket	1
AHX	Latch Cover Plate	1
AHW	Latch Block	1
ADZ	1/4" x 5/8" Pan-Head Screw	9
ADW	#10 x 3/4" Pan-Head Screw	4
AEE	#10 x 1/2" Flat Washer	3
ADB	3/8" x 1/2" Steel Spacer	2
AHY	Latch Spring	1
ACI	1/4" x 2" Carriage Bolt	2
AAB	1/4" Centerlock Nut	2
AEB	1/4" Flat Washer	2
<b>BMX Wall Panel Installation Hardware</b>		
ADZ	1/4" x 5/8" Pan-Head Screw	116

### BOX 1 (CONT.)

ID	Description	Qty
<b>BNA Gable Assembly Hardware (x2)</b>		
AGP	Louvered Vent	1
AIQ	Vent Screen	1
ADW	#10 x 3/4" Pan-Head Screw	5
AEE	#10 x 1/2" Flat Washer	5
ADZ	1/4" x 5/8" Pan-Head Screw	4
<b>BHC Pegboard Strip Installation Hardware</b>		
ADW	#10 x 3/4" Pan-Head Screw	10
<b>BHD Tool Clip Assortment</b>		
AIF	2" Double-Arm Hook	1
AIG	4" Double-Arm Hook	1
AIL	L-Hook	3
AIH	J-Hook	3
AIJ	Tool Holder	2
<b>BKD Door &amp; Entry Gable Installation</b>		
ADZ	1/4" x 5/8" Pan-Head Screw	24
ACH	1/4" x 1 1/2" Carriage Bolt	4
ACA	1/4" x 1/2" Carriage Bolt	4
ADJ	1/4" Cap Nut	8
ADX	#10 x 1/2" Pan-Head Screw	2
AEB	1/4" Flat Washer	4
AHL	Dead Bolt Strike Plate	1
AHN	Floor Bracket	2
<b>BND Trim Installation Hardware</b>		
AGA	Corner Trim Bracket	24
AHQ	Door Trim Bracket	4
AHR	Door Trim Clip	2
ADX	#10 x 1/2" Pan-Head Screw	56
ACK	#8 x 1" Pan-Head Screw	4
<b>SHELF INSTALLATION HARDWARE</b>		
<b>BHE 10" x 30" Shelf Installation Hardware (x5)</b>		
ADX	#10 x 1/2" Pan-Head Screw	12
AEE	#10 Flat Washer	12
AIY	10" Shelf Bracket	2
<b>BMY 14" x 30" Shelf Installation Hardware (x2)</b>		
ADX	#10 x 1/2" Pan-Head Screw	4
AEE	#10 Flat Washer	4
<b>BTM Door Spacing Adjustment Hardware</b>		
ADZ	1/4" x 5/8" Pan-Head Screw	4
<b>BOX 2</b>		
<b>BNL BOX 2 METAL PARTS KIT 1</b>		
AFO	Truss Brace Channel	2
AFH	Truss Gutter Channel	4
AFP	Truss Support Strip	4
<b>BNK BOX 2 METAL PARTS KIT 2</b>		
AFQ	Wall Support Channel	4
<b>PLASTIC &amp; MISCELLANEOUS PARTS</b>		
AFY	Center Roof Cap	2
AGQ	Inner Roof Panel	3
AHB	Inner Roof Panel for Domed Skylight	1
AHD	Wall Panel	3
AGB	Domed Skylight	1
AHH	Window Wall Panel	1
AHG	Window Frame	2
AGJ	Inner Floor Panel	4
AHF	Window	2
AFL	Roof Support Strip	12



## PARTS & HARDWARE LIST

### BOX 2 (CONT.)

ID	Description	Qty
<b>CJV</b>	<b>BOX 2 SHED PARTS BOX</b>	
<b>BGV</b>	<b>Truss Assembly Hardware (x5)</b>	
ADJ	1/4" Cap Nut	10
AAK	1/4" x 1 1/2" Hex Bolt	10
AHK	Truss Connector	1
AHT	Floor Bracket	2
<b>CJW</b>	<b>Truss &amp; Wall/Shelf Support Channel Installation Hardware</b>	
ADZ	1/4" x 5/8" Pan-Head Screw	128
AAK	1/4" x 1 1/2" Hex Bolt	18
ADJ	1/4" Cap Nut	18
AHT	Floor Bracket	6
<b>CJX</b>	<b>Roof &amp; Rear Gable Installation Hardware</b>	
ADZ	1/4" x 5/8" Pan-Head Screw	220
ACJ	#10 x 5/8" Pan-Head Screw	16
AED	#10 x 1" Fender Washer	16
ADX	#10 x 1/2" Pan-Head Screw	4
ACF	#10 x 5/16" Pan-Head Screw	1
ADK	#10 Cap Nut	1
AJA	Foam Cube	20

### BOX 3

#### BNL BOX 2 METAL PARTS KIT 1

AFO	Truss Brace Channel	2
AFH	Truss Gutter Channel	4
AFP	Truss Support Strip	4

#### BNK BOX 2 METAL PARTS KIT 2

AFQ	Wall Support Channel	4
-----	----------------------	---

#### PLASTIC & MISCELLANEOUS PARTS

AFY	Center Roof Cap	2
AGQ	Inner Roof Panel	3
AHB	Inner Roof Panel for Domed Skylight	1
AHD	Wall Panel	3
AGB	Domed Skylight	1
AHH	Window Wall Panel	1
AHG	Window Frame	2
AGJ	Inner Floor Panel	4
AHF	Window	2
AFL	Roof Support Strip	12

#### BNB BOX 3 SHED PARTS BOX

##### BGU Window Assembly & Installation Hardware (x2)

ADZ	1/4" x 5/8" Pan-Head Screw	4
ADW	#10 x 3/4" Pan-Head Screw	4
ADX	#10 x 1/2" Pan-Head Screw	22
AEE	#10 x 1/2" Flat Washer	2
ACF	#10 x 5/16" Pan-Head Screw	2
ACB	#10 x 1 1/4" Pan-Head Screw	4
ACD	#10 x 3/8" Flat-Head Screw	2
ADK	#10 Cap Nut	2
AIE	Mounted Window Stay	2
AIN	Sliding Window Stay	2
AIV	Window Stay Bracket	2
AIR	Window Hinge Tube	4
AIU	Window Latch Bearing	4
AIT	Window Latch	4

### BOX 3 (CONT.)

ID	Description	Qty
<b>BEC</b>	<b>Domed Skylight Assembly Hardware (x2)</b>	
ACR	#10 x 5/8" Carriage Bolt	12
ADK	#10 Cap Nut	12
AEE	#10 x 1/2" Flat Washer	12
AHI	Butyl Tape	1

### BOX 4

#### PLASTIC & MISCELLANEOUS PARTS



AHD	Wall Panel	8
AGZ	Right Door	1
AGO	Left Door	1
AQX	Corner Trim Piece	4
AGC	Door Top Trim	1
AGD	Door Side Trim	2

## PARTS IDENTIFIER



### BOX 1

#### BOX 1 METAL PARTS KIT [BUA]



Parts shown at 8% of actual size





**AFQ (x8)**  
Wall/Shelf Support Channel





**AFO (x1)**  
Truss Brace Channel




**AFC (x2)**  
Door End Channel






**AFR (x4)**  
Corner Channel



**AFD (x1)**  
Door Header Channel



**AFH (x2)**  
Truss Gutter Channel




**AFP (x2)**  
Truss Support Strip

**AFJ (x2)**  
Long Wall Support Channel Extension



**AFN (x4)**  
Short Wall Support Channel Extension

### DOOR HINGE PARTS KIT [BTI]

Parts shown at 8% of actual size



**AFI (x1)**  
Left Hinge Assembly




**AFK (x1)**  
Right Hinge Assembly


## BOX 1 (CONT.)

### PLASTIC & MISCELLANEOUS PARTS


Parts shown at 4% of actual size




**AFS** (x5)  
10" x 30" Shelf




**AFT** (x2)  
14" x 30" Shelf

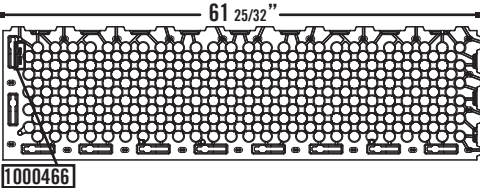


**AGS** (x2)  
Outer Floor Panel "A"

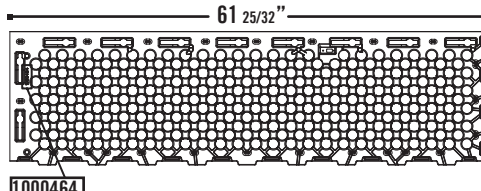


**AGT** (x2)  
Outer Floor Panel "B"

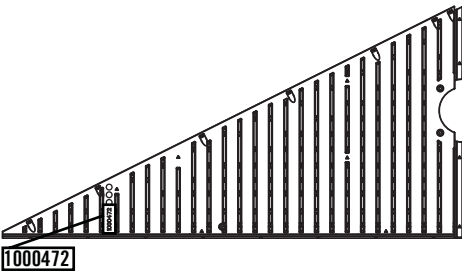


**AGH** (x2)  
Gable Half 1

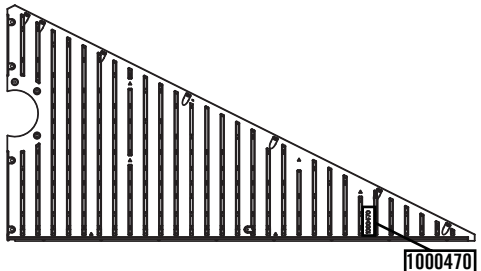


**AGI** (x2)  
Gable Half 2

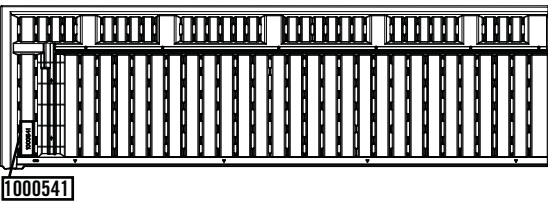


**AGU** (x2)  
Outer Roof Panel "A"

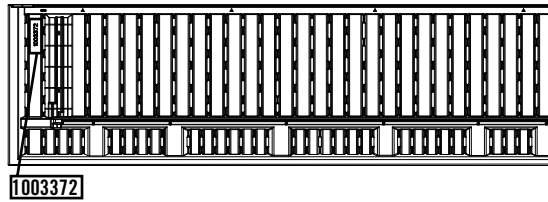


**AGV** (x2)  
Outer Roof Panel "B"



**AGE** (x2)  
End Roof Cap



**AFF** (x2)  
Gable Truss Brace




**AFB** (x6)  
Door Brace

## PARTS & HARDWARE IDENTIFIER

### BOX 1 (CONT.)

#### BOX 1 SHED PARTS BOX [BTH]


Parts shown at 15% of actual size (\*Unless otherwise noted)



**AFU** (x2)  
Pegboard Strip




**AIZ** (x4)  
14" Shelf Bracket




**AHA** (x2)  
Roof Cap Cover

#### LEFT DOOR ASSEMBLY HARDWARE [BKB]


Hardware shown at actual size (\*Unless otherwise noted)




**\*AHZ** (x1)  
Left Door Handle




**\*AHM** (x2)  
Deadbolt Latch



**ACH** (x2)  
1/4" x 1 1/2" Carriage Bolt



**ADX** (x3)  
#10 x 1/2" Pan-Head Screw




**AEE** (x3)  
#10 x 1/2" Flat Washer




**ADJ** (x2)  
1/4" Cap Nut



**\*AIA** (x1)  
Left Door Lock Bracket




**\*AIB** (x1)  
Left Door Strike Plate




**ADZ** (x9)  
1/4" x 5/8" Pan-Head Screw

#### RIGHT DOOR ASSEMBLY HARDWARE [BKC]


Hardware shown at actual size (\*Unless otherwise noted)



**\*AIK** (x1)  
Right Door Handle




**ACI** (x2)  
1/4" x 2" Carriage Bolt




**AEE** (x3)  
#10 x 1/2" Flat Washer  
(Only 3 are used)




**ADB** (x2)  
3/8" x 1/2" Steel Spacer




**AAB** (x2)  
1/4" Centerlock Nut




**AHY** (x1)  
Latch Spring




**\*AHW** (x1)  
Latch Block



**\*AIO** (x1)  
Thumb Lever




**ADW** (x4)  
#10 x 3/4" Pan-Head Screw




**AEB** (x2)  
1/4" Flat Washer




**\*AHX** (x1)  
Latch Cover Plate



**\*AHV** (x1)  
Door Latch



**\*AIL** (x1)  
Right Door Lock Bracket




**ADZ** (x9)  
1/4" x 5/8" Pan-Head Screw

## PARTS & HARDWARE IDENTIFIER

### BOX 1 (CONT.)

#### WALL PANEL INSTALLATION HARDWARE [BMX]

Hardware shown at actual size




**ADZ** (x116)

1/4" x 5/8" Pan-Head Screw (Not all screws are used)


#### GABLE ASSEMBLY HARDWARE [BNA] (x2)

Hardware shown at actual size




**AGP** (x1)

Louvered Vent



**AIQ** (x1)

Vent Screen




**ADZ** (x4)

1/4" x 5/8" Pan-Head Screw



**ADW** (x5)

#10 x 3/4" Pan-Head Screw




**AEE** (x5)

#10" x 1/2" Pan-Head Screw

#### PEGBOARD STRIP INSTALLATION HARDWARE [BHC]

Hardware shown at actual size




**ADW** (x10)

#10 x 3/4" Pan-Head Screw


#### Tool Clip Assortment [BHD]

Hardware shown at 50% of actual size

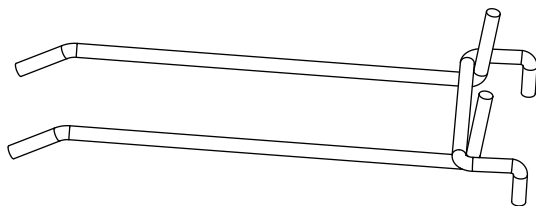


**AIG** (x1)

4" Double-Arm Hook

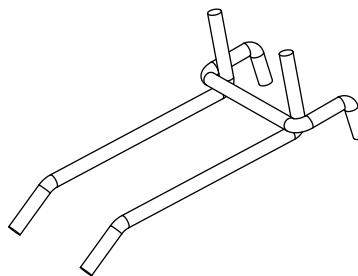


**AIF** (x1)

2" Double-Arm Hook




**AII** (x3)

L-Hook



**AIH** (x3)

J-Hook



**AIJ** (x2)


Toolholder

## PARTS & HARDWARE IDENTIFIER


### BOX 1 (CONT.)

#### DOOR & ENTRY GABLE INSTALLATION HARDWARE [BKD]

Hardware shown at actual size (\*Unless otherwise noted)



**ADZ** (x24)  
1/4" x 5/8" Pan-Head Screw




**ACH** (x4)  
1/4" x 1 1/2" Carriage Bolt



**\*AHL** (x1)  
Dead Bolt Strike Plate




**\*AHN** (x2)  
Floor Bracket




**ADX** (x2)  
#10 x 1/2" Pan-Head Screw



**ADJ** (x8)  
1/4" Cap Nut




**ACA** (x4)  
1/4" x 1/2" Carriage Bolt




**AEB** (x4)  
1/4" Flat Washer

#### TRIM INSTALLATION HARDWARE [BND]


Hardware shown at actual size (\*Unless otherwise noted)




**\*AGA** (x24)  
Corner Trim Bracket




**\*AHQ** (x4)  
Door Trim Bracket



**\*AHR** (x2)  
Door Trim Clip



**ADX** (x56)  
#10 x 1/2" Pan-Head Screw




**ACK** (x4)  
#8 x 1" Pan-Head Screw


#### SHELF INSTALLATION HARDWARE

Hardware shown at actual size (\*Unless noted otherwise)

##### 14" x 30" Shelf Hardware [BMY] (x2)




**ADX** (x4)  
#10 x 1/2" Pan-Head Screw




**AEE** (x4)  
#10 Flat Washer

##### 10" x 30" Shelf Hardware [BHE] (x5)



**ADX** (x12)  
#10 x 1/2" Pan-Head Screw  
(Not all are used)




**AEE** (x12)  
#10 Flat Washer  
(Not all are used)



**\*AIY** (x2)  
10" Shelf Bracket

#### DOOR SPACING ADJUSTMENT HARDWARE [BTM]

Hardware shown at actual size



**ADZ** (x4)  
1/4" x 5/8" Pan-Head Screw




## PARTS IDENTIFIER

### BOX 2

#### BOX 2 METAL PARTS KIT 1 [BNL]

Parts shown at 8% of actual size




**AFO** (x2)

Truss Brace Channel



**AFH** (x4)

Truss Gutter Channel



**AFP** (x4)

Truss Support Strip

#### BOX 2 METAL PARTS KIT 2 [BNK]

Parts shown at 8% of actual size




**AFQ** (x4)

Wall/Shelf Support Channel


### PLASTIC & MISCELLANEOUS PARTS

Parts shown at 4% of actual size

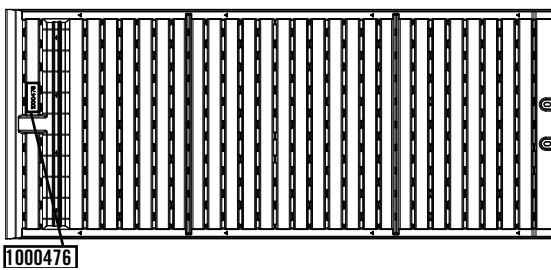


**AGQ** (x3)

Inner Roof Panel

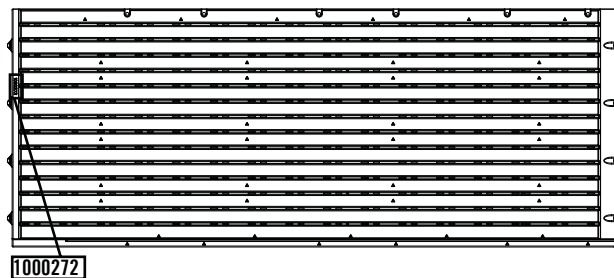


**AHD** (x3)

Wall Panel

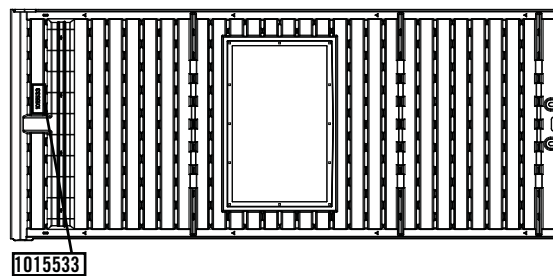

**AHB** (x1)

Inner Roof Panel for Domed Skylight

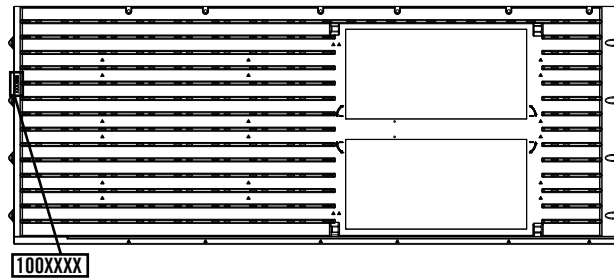

**AHH** (x1)


Window Wall Panel

## PARTS IDENTIFIER

### BOX 2 (CONT.)

#### PLASTIC & MISCELLANEOUS PARTS (CONT.)


Parts shown at 4% of actual size

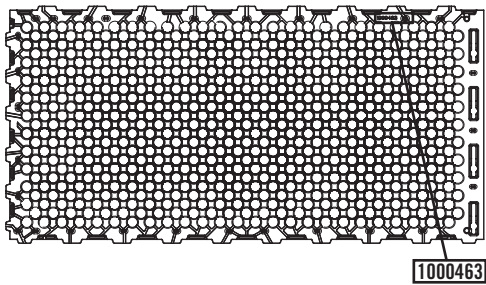

**AGJ** (x4)


Inner Floor Panel

Parts shown at 8% of actual size

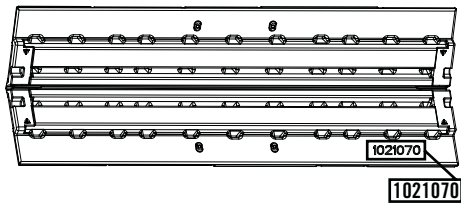


**AFY** (x2)

Center Roof Cap




**AGB** (x1)

Domed Skylight

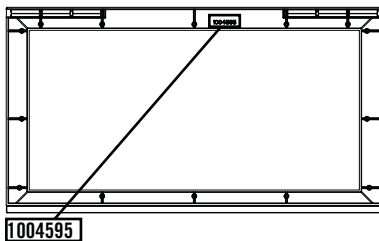


**AHG** (x2)

Window Frame

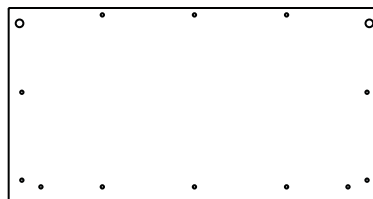

**AHF** (x2)

Window



**AFL** (x12)

Roof Support Strip

## PARTS & HARDWARE IDENTIFIER

### BOX 2 (CONT.)


#### BOX 2 SHED PARTS BOX [CJV]

##### TRUSS ASSEMBLY HARDWARE [BGV] (x5)


Hardware shown at actual size (\*Unless otherwise noted)




**ADJ** (x10)  
1/4" Cap Nut



**AAK** (x10)  
1/4" x 1 1/2" Hex Bolt




**\*AHT** (x2)  
Floor Bracket




**\*AIP** (x1)  
Truss Connector

#### TRUSS & WALL/SHELF SUPPORT CHANNEL ASSEMBLY INSTALLATION HARDWARE [CJW]

Hardware shown at actual size (\*Unless otherwise noted)



**ADZ** (x128)  
1/4" x 5/8" Pan-Head Screw



**AAK** (x18)  
1/4" x 1 1/2" Hex Bolt




**ADJ** (x18)  
1/4" Cap Nut




**\*AHT** (x6)  
Floor Bracket

#### ROOF & REAR GABLE INSTALLATION HARDWARE [CJX]

Hardware shown at actual size (\*Unless otherwise noted)



**ADZ** (x220)  
1/4" x 5/8" Pan-Head Screw  
(Not all screws will be used)



**\*AJA** (x20)  
Foam Cube  
(Not all are used)




**ADK** (x1)  
#10 Cap Nut




**ACJ** (x16)  
#10 x 5/8" Pan-Head Screw



**ACF** (x1)  
#10 x 5/16" Pan-Head Screw



**AED** (x16) #10 x 1"  
Fender Washer




**ADX** (x4)  
#10 x 1/2" Pan-Head Screw

## PARTS IDENTIFIER

### BOX 3


#### BOX 3 METAL PARTS KIT 1 [BNL]

Parts shown at 8% of actual size




**AFO** (x2)

Truss Brace Channel



**AFH** (x4)

Truss Gutter Channel



**AFP** (x4)

Truss Support Strip

#### BOX 3 METAL PARTS KIT 2 [BNK]

Parts shown at 8% of actual size




**AFQ** (x4)

Wall/Shelf Support Channel

### PLASTIC & MISCELLANEOUS PARTS


Parts shown at 4% of actual size

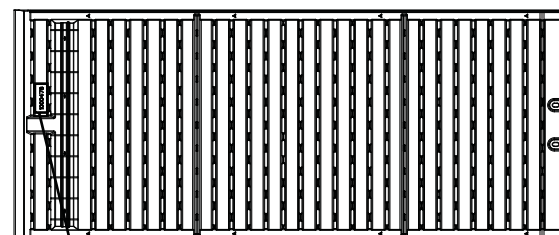

**1000476**

**AGQ** (x3)


Inner Roof Panel

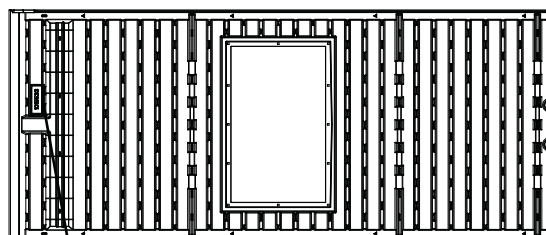

**1015533**

**AHB** (x1)


Inner Roof Panel for Domed Skylight

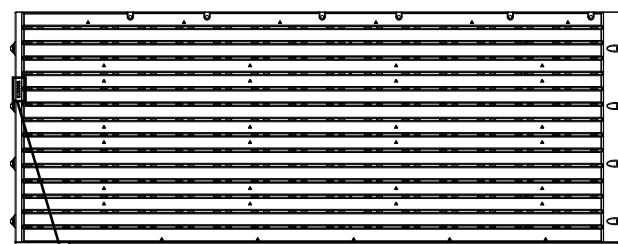

**1000272**

**AHD** (x3)

Wall Panel

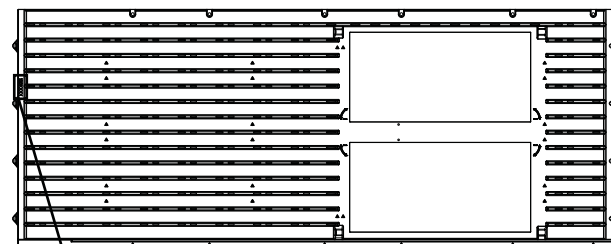

**100XXXX**


**AHH** (x1)

Window Wall Panel

## BOX 3 (CONT.)


### PLASTIC & MISCELLANEOUS PARTS (CONT.)

Parts shown at 4% of actual size

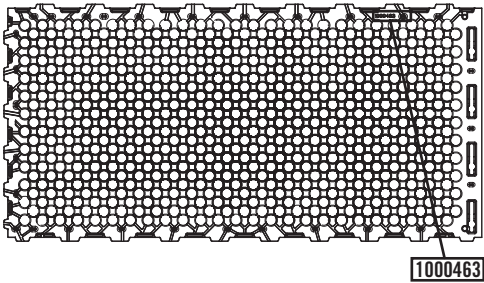


**AGJ (x4)**  
Inner Floor Panel


Parts shown at 8% of actual size

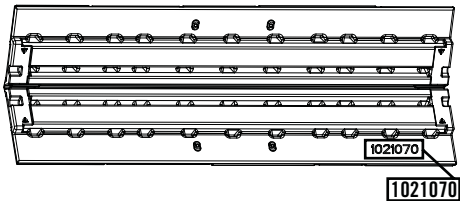


**AFY (x2)**  
Center Roof Cap




**AGB (x1)**  
Domed Skylight

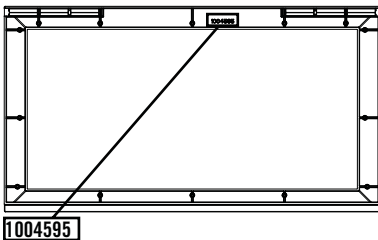

**AHG (x2)**  
Window Frame

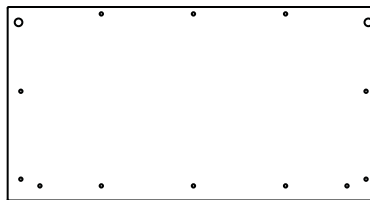

**AHF (x2)**  
Window



**AFL (x12)**  
Roof Support Strip


## PARTS & HARDWARE IDENTIFIER

### BOX 3 (CONT.)


#### BOX 3 SHED PARTS BOX [BNB]

#### WINDOW INSTALLATION HARDWARE [BGU] (x2)


Hardware shown at actual size (\*Unless otherwise noted)



**ADZ** (x4)  
1/4" x 5/8" Pan-Head Screw




**ADW** (x4)  
#10 x 3/4" Pan-Head Screw



**ADX** (x22)  
#10 x 1/2" Pan-Head Screw




**ACF** (x2)  
#10 x 5/16" Pan-Head Screw




**AEE** (x2)  
#10 Flat Washer




**ADK** (x2)  
#10 Cap Nut



**ACB** (x4)  
#10 x 1 1/4" Pan-Head Screw




**ACD** (x2)  
#10 x 3/8" Flat-Head Screw




**\*AIE** (x2)  
Mounted Window Stay




**\*AIN** (x2)  
Sliding Window Stay




**\*AIV** (x2)  
Window Stay Bracket



**\*AIU** (x4)  
Window Latch Bearing




**\*AIT** (x4)  
Window Latch



**\*AIR** (x4)  
Window Hinge Tube

#### DOMED SKYLIGHT ASSEMBLY HARDWARE [BEC] (x2)


Parts shown at 8% of actual size



**ACR** (x12)  
#10 x 5/8" Carriage Bolt



**ADK** (x12)  
#10 Cap Nut



**AEE** (x12)  
#10 Flat Washer



**AHI** (x1)  
Butyl Tape




## PARTS IDENTIFIER

### BOX 4

#### PLASTIC & MISCELLANEOUS PARTS


Parts shown at 4% of actual size

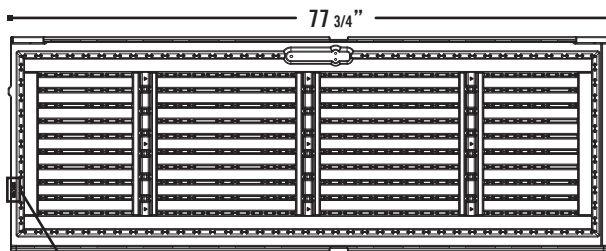

1001790

**AGO** (x1)


Left Door

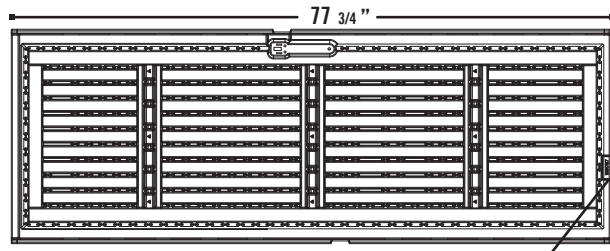

1001787

**AGZ** (x1)


Right Door

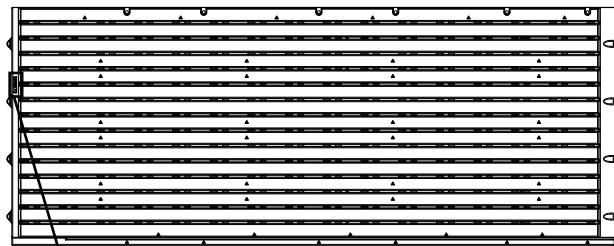

1000272


**AHD** (x8)

Wall Panel




**AGC** (x1)

Top Door Trim

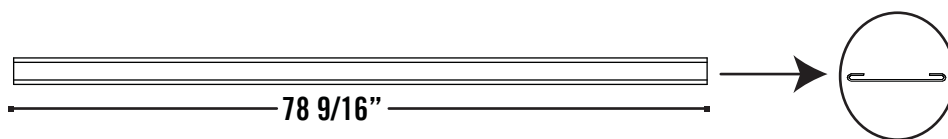

**AGD** (x2)

Side Door Trim

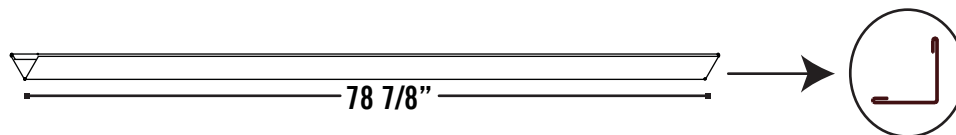

**AQX** (x4)

Corner Trim




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



Concrete (1.5 cu. yd.)

SEC 1

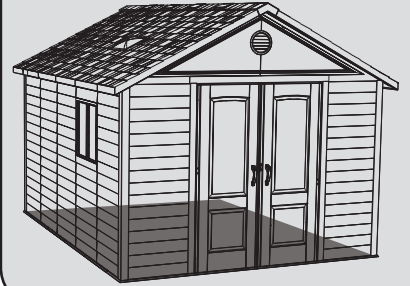

SEC


1.1

### SITE PREPARATION - CONCRETE PLATFORM PREPARATION

The actual dimensions of your shed (at its widest and longest points) are 11' x 13'6". Ensure you select a site that will accommodate these measurements. The base of the shed is slightly smaller than this, so you will need to create a level surface that is at least 123 1/2" x 153 1/2". We recommend using a level cement or patio style surface. This will provide the best long-term performance for your shed.



**Note:** Shed Extension Kits are available for this shed. Please consider possible shed expansion when planning the site for your shed. See back cover of this manual for information on ordering accessories.

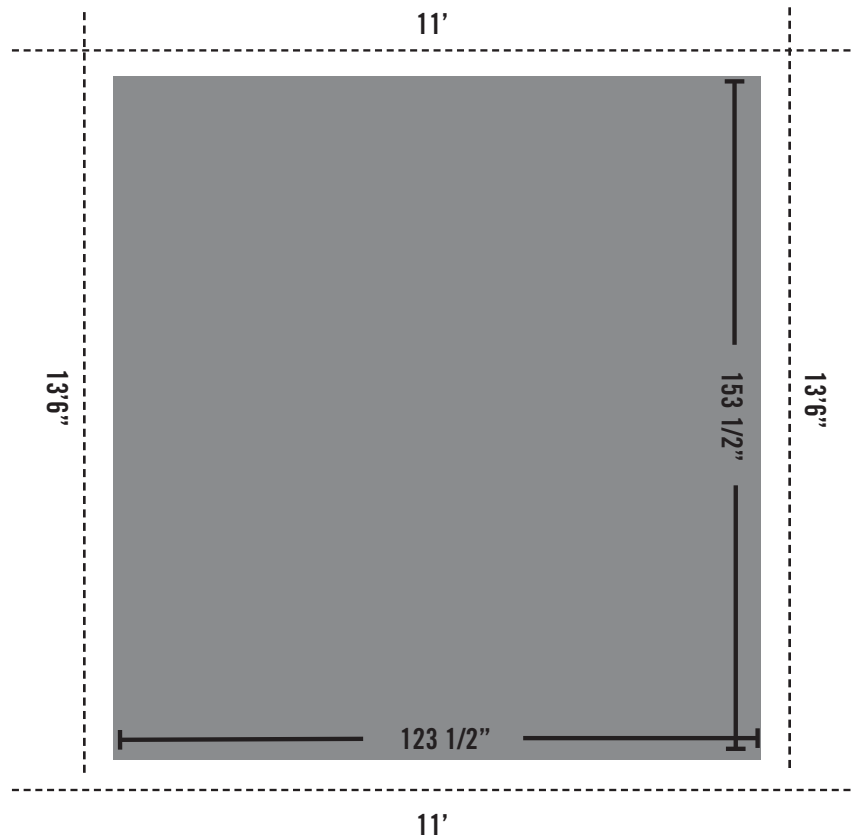

**Note:** Surface must be leveled before installation. If the surface is not properly leveled, the Outdoor Shed will not assemble or function correctly. Proper surface leveling will save you time in the long run, so please do not ignore this step.



**Note:** Any platform or similar structure should be built above ground in order to avoid water pooling inside the Shed.




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



2" x 4" x 153 1/2" (x2) (Not included)




2" x 4" x 120 1/2" (x11) (Not included)



16d 3" Common Nail (x44) (Not included)

SEC 1

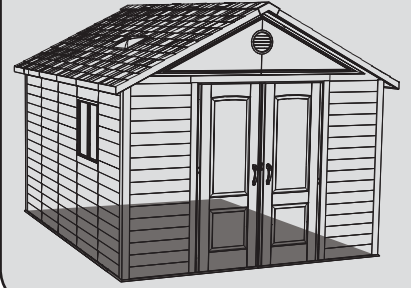

SEC



1.2

### ALTERNATIVE SITE PREPARATION: OPTION 1 - WOOD PLATFORM ASSEMBLY

Ensure all lumber used is treated and approved for outdoor use. Build outside frame to 123 1/2" x 153 1/2" outside dimensions:



*Note: Whenever possible, you should use the surfaces described on Page 7. When this is not possible, we recommend you use a wood platform or a filled wood frame.*

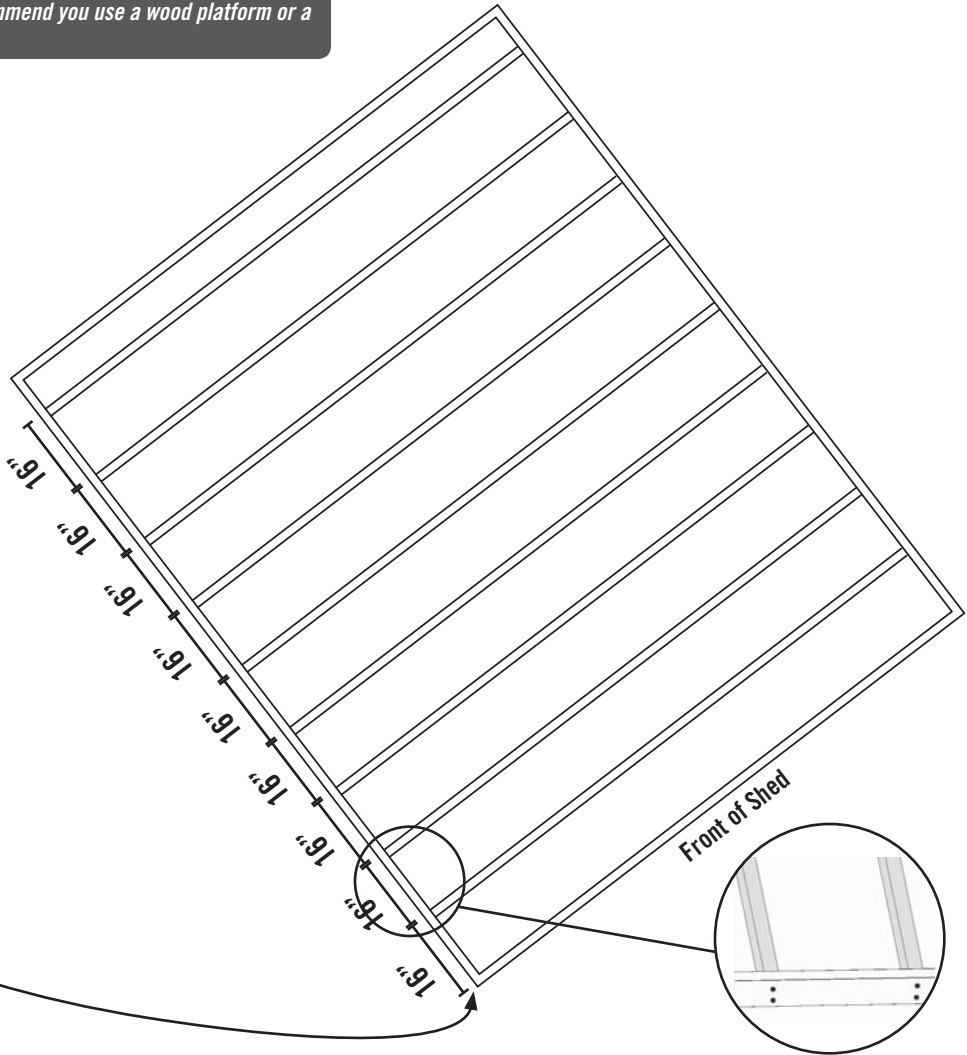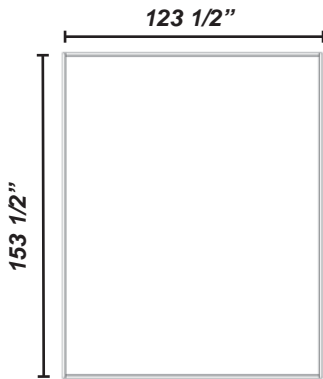

To be sure to have studs in the correct location to nail plywood in the next step, start measuring from outside edge of first board 16" to the center of the second. Then measure the remaining boards from center to center.



*Note: All lumber must be rated for outdoor use.*




*Note: Surface must be leveled before installation. If the surface is not properly leveled, the Outdoor Shed will not assemble or function correctly. Proper surface leveling will save you time in the long run, so please do not ignore this step.*

Place the 2" x 4" x 120 1/2" boards on the inside of the frame. Nail each board in place with the 16d nails.




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 1

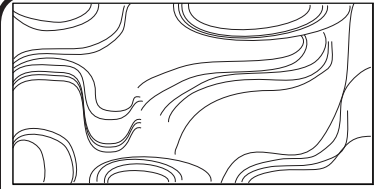

48" x 96" x 3/4" Treated Plywood (x3)  
(Not included)




27 1/2" x 96" x 3/4" Treated Plywood (x1)  
(Not included)




27 1/2" x 57 1/2" x 3/4" Treated Plywood (x1) (Not included)



9 1/2" x 96" x 3/4" Treated Plywood (x1) (Not included)



8d 1 1/2" Common Nail (x70)  
(Not included)

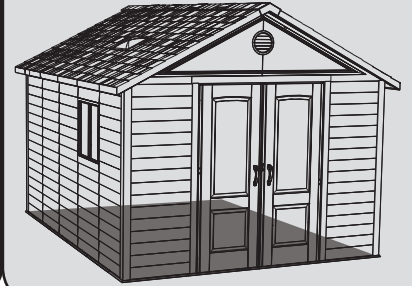


SEC

1.3

### ALTERNATIVE SITE PREPARATION: OPTION 1 - WOOD PLATFORM ASSEMBLY (CONT)

Square up the frame by measuring from corner to corner. Measurement A should equal Measurement B.

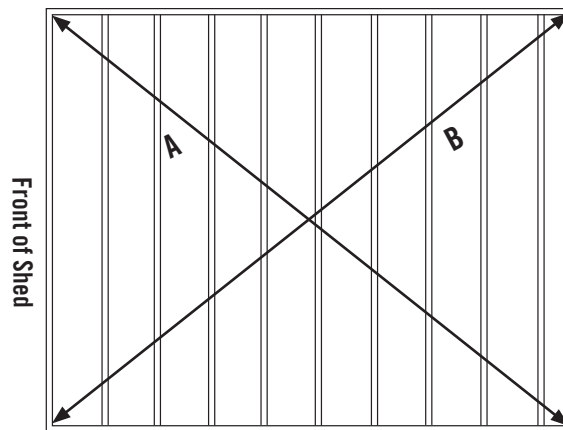

*Note: All lumber must be rated for outdoor use.*

SEC

1.4

Cut Plywood into sizes called for below. Arrange the Plywood according to the diagram and nail into place with 8d x 1 1/2" nails. Place platform in the desired location. If platform does not rest level on the ground, build up low points with loose dirt until platform is stable. Drill three evenly spaced 1/2" drain holes in plywood between each 2" x 4" joist.

Front of Shed		27 1/2" x 96"		27 1/2" x 57 1/2"	
		48" x 96"	48" x 96"	48" x 96"	9 1/2" x 96"



## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE


SEC 1



2" x 4" x 153 1/2" (x2) (Not included)




2" x 6" x 116 1/2" (x2) (Not included)




8d 1 1/2" Common Nail (x16)  
(Not included)



Pea Gravel (17 Cubic Feet)  
(Not included)



L-Bracket (x4)  
(Not included)

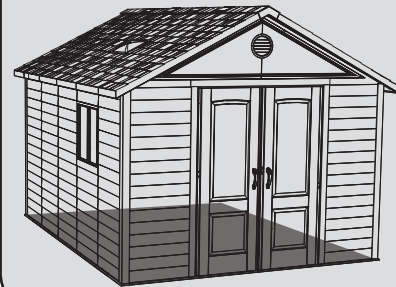

SEC

1.5

### ALTERNATIVE SITE PREPARATION: OPTION 2 - FILLED WOOD FRAME ASSEMBLY



Cut outside frame to 123 1/2" x 153 1/2" **outside dimensions**. Lay boards flat so widest parts face up. Ensure frame is level. Square up the frame by measuring from corner to corner. Measurement A should equal Measurement B. Nail an L-Bracket on each corner of the frame with 8d nails. Place platform in the desired location. If platform does not rest level on the ground, build up low points with loose dirt or "Pea" gravel, until platform is stable.



*Note: Whenever possible you should use the surfaces described on Page 7.*



*Note: All lumber must be rated for outdoor use.*

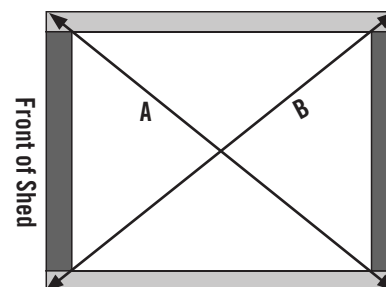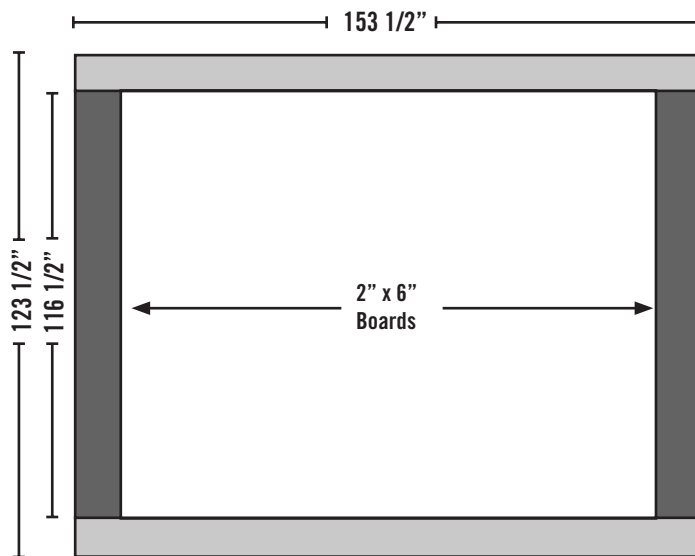

SEC

1.6


Once all boards are level and do not wobble, pack "Pea" gravel around the outside of the frame, and slope away from frame.



SEC

1.7

Now fill the inside of the frame with "Pea" gravel. Use a leveling board to scrape off extra fill material and to level the surface.

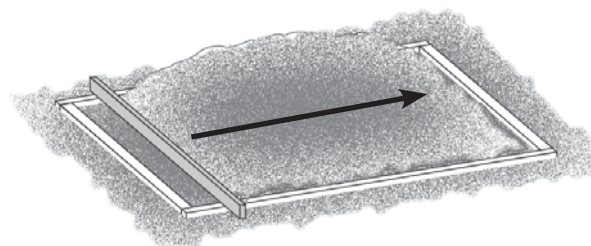

2" x 4" x 11' Leveling Board (x1)

## SEC 2 FLOOR ASSEMBLY

### HARDWARE REQUIRED


NO HARDWARE REQUIRED FOR THIS SECTION

### METAL PARTS REQUIRED

NO METAL PARTS REQUIRED FOR THIS SECTION

### PLASTIC PARTS REQUIRED


Parts shown at 4% of actual size



1000466

(AGS) (x2)


Outer Floor Panel "A"



1000464

(AGT) (x2)

Outer Floor Panel "B"

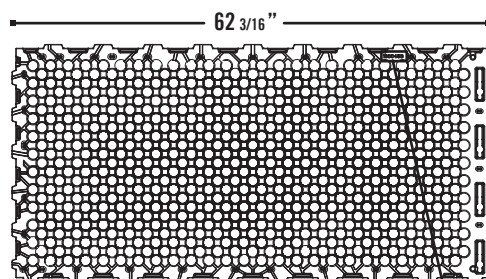


(AGJ) (x8)


Inner Floor Panel

1000463

### TOOLS REQUIRED



Hammer Drill



Safety Glasses




3/8" Masonry Bit






## TOOLS AND PARTS REQUIRED FOR THIS PAGE



NO HARDWARE REQUIRED FOR THIS PAGE

SEC 2

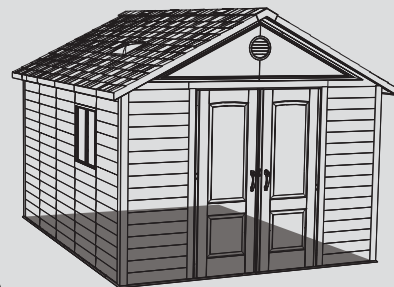


SEC

2.1


### FLOOR PANEL ASSEMBLY

Hold one (1) **Outer Floor Panel "B" (AGT)** at an angle against one (1) **Outer Floor Panel "A" (AGS)** so the tabs on Panel "B" fit underneath Panel "A", and the tabs on Panel "A" fit underneath Panel "B". Then, lay Panel "B" flat.

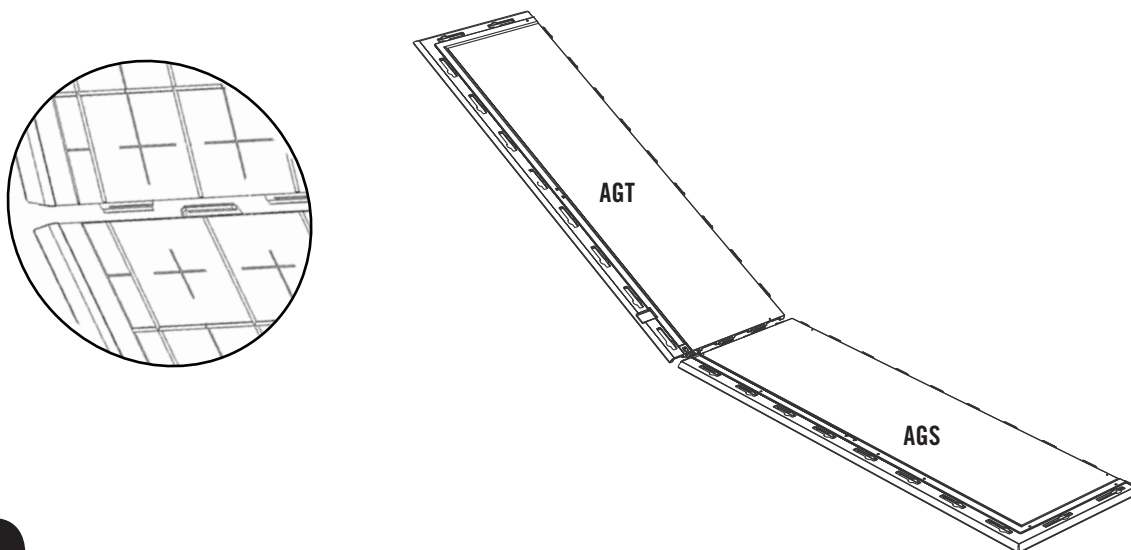

SEC

Hold a **Inner Floor Panel (AGJ)** at an angle against another Inner Floor Panel so the tabs on each Panel fit underneath the other Panel. Then, lay the Panel flat.

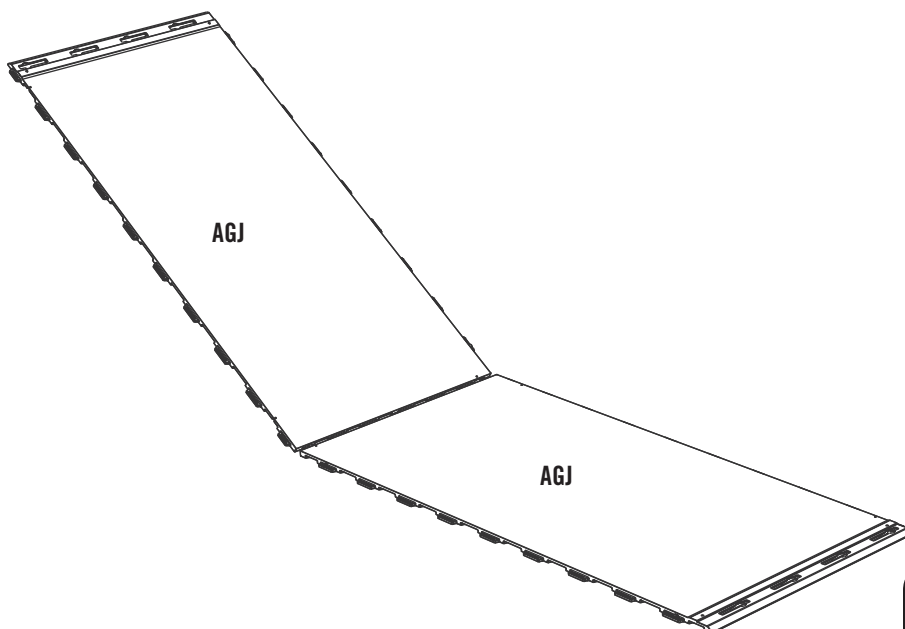


### CAUTION

Sharp objects may damage your floor. If resting sharp, heavy objects on your shed floor, place a block of wood between the sharp object and floor.




## TOOLS AND PARTS REQUIRED FOR THIS PAGE



NO HARDWARE REQUIRED FOR THIS PAGE


SEC 2

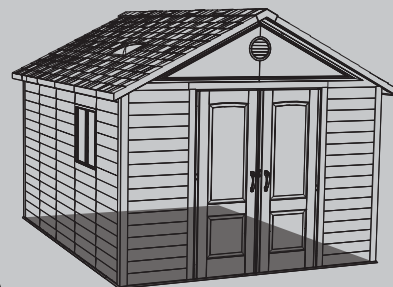

SEC





2.2

Connect the Inner Floor Panels to the Outer Floor Panels following this same procedure.

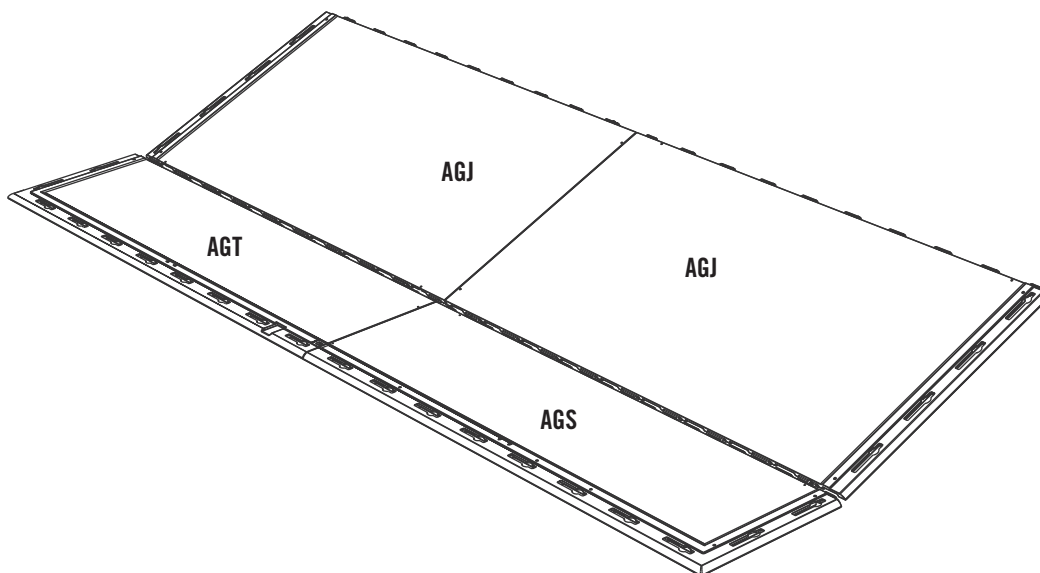


SEC

Repeat **Step 2.2 -2.3** to connect all the **Outer Floor Panels (AGS & AGT)** to the Inner Floor Panels. Finally, connect the last two (2) **Outer Floor Panels (AGS & AGT)** to the Inner Floor Panels.

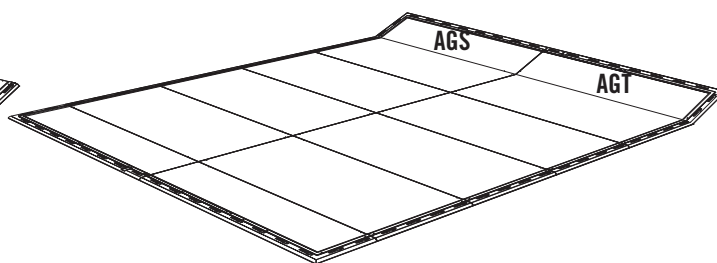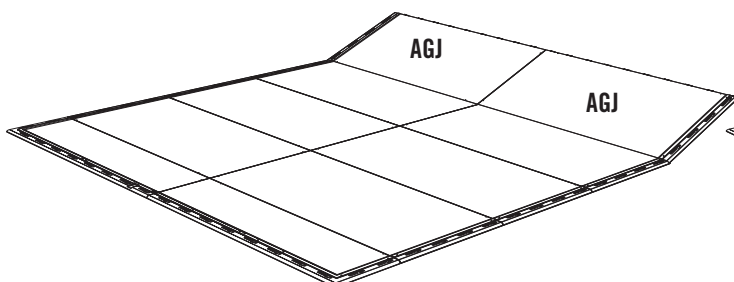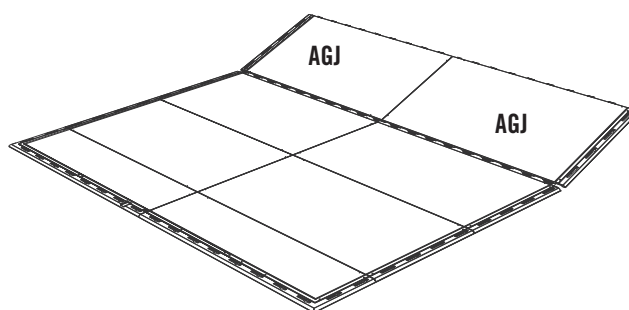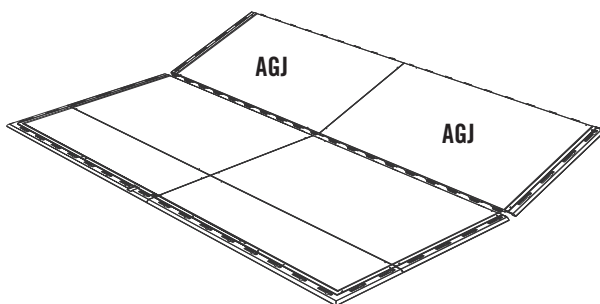




## TOOLS AND PARTS REQUIRED FOR THIS PAGE



NO HARDWARE REQUIRED FOR THIS PAGE


SEC 2

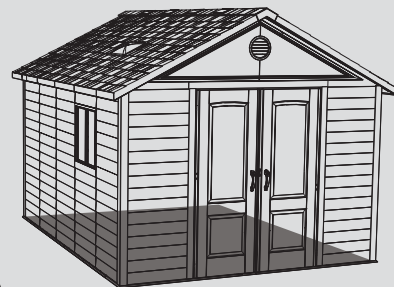

### 2 PEOPLE REQUIRED FOR THIS STEP

SEC 2.3


If you plan on anchoring your shed to your concrete pad, lay your Floor out on your pad in the position you would like your shed to face. While another person holds the Floor in place, punch out **one** hole by **each** seam and mark the position of that hole on the pad beneath.

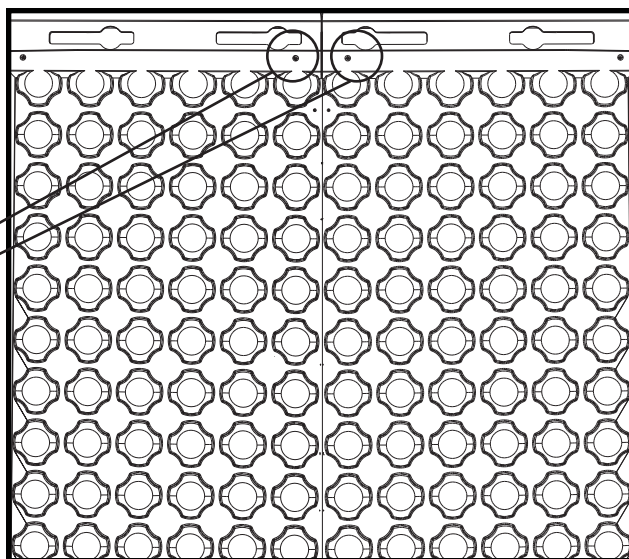

*Note: Pick only one hole by the seam.*

SEC

Once all holes have been marked, remove the Floor from the pad and drill out the holes using a hammer drill and 3/8" masonry bit. Once all holes have been drilled, position the Floor again on the pad being sure to align the holes in the Floor with the holes you drilled in the pad. You'll finish anchoring the shed at the end of the instructions.

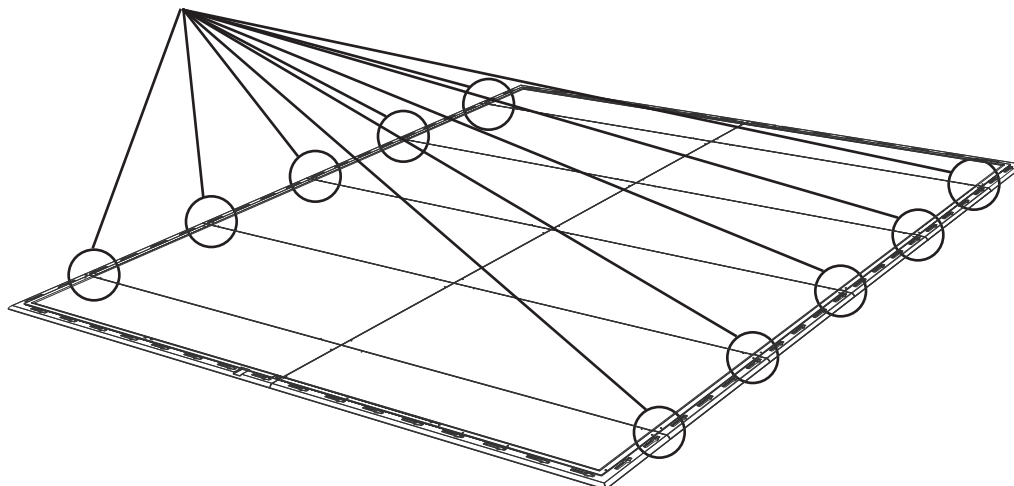


*Note: Do not use a drill bit or hardware that exceeds 3/8" in diameter.*

## SEC 3 TRUSS ASSEMBLY

### HARDWARE REQUIRED

Hardware shown at actual size




**AAK** (x50)  
1/4" x 1 1/2" Hex Bolt



**ADJ** (x50)  
1/4" Cap Nut

Hardware shown at 50% of actual size



**AIP** (x5)  
Truss Gutter Connector



**AHT** (x10)  
Floor Bracket



### METAL PARTS REQUIRED

Parts shown at 8% of actual size





71 11/16"

**AFH** (x10)  
Truss Gutter Channel





79 1/2"

**AFG** (x5)  
Truss Brace Channel



79 1/2"

**AFQ** (x10)  
Wall Support Channel



20 1/8"

**AFP** (x10)  
Truss Support Strip


### PLASTIC PARTS REQUIRED

NO PLASTIC PARTS REQUIRED IN THIS SECTION

### TOOLS REQUIRED



7/16" Wrench (x2)



Safety Glasses




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 3




7/16" (x2)




AAK (x30)



ADJ (x30)



AIP (x5)  
(Not to scale)

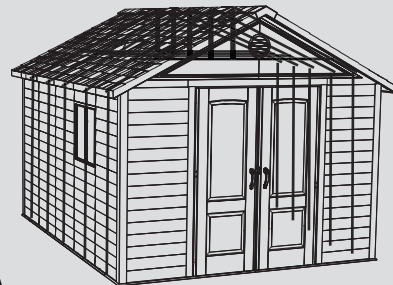


### SEC

#### 3.1

### TRUSS ASSEMBLY

Fit two **Truss Support Strips (AFP)** together. Bolt Truss Support Strips, **Truss Gutter Connector (AIP)**, and two **Truss Gutter Channels (AFH)** as shown using the required hardware.

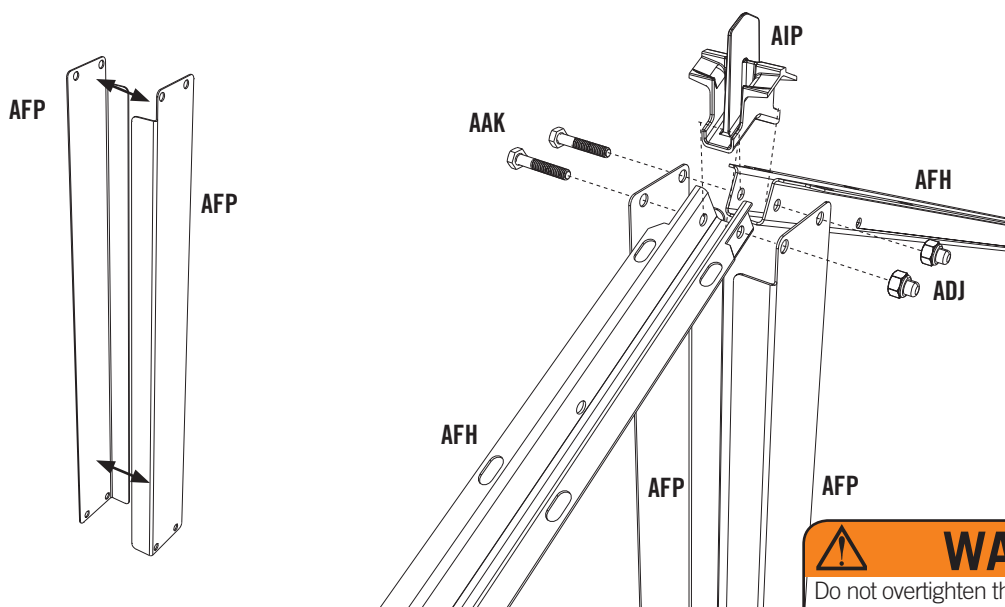

*Note: Only finger tighten hardware.*




### WARNING

Do not overtighten the Cap Nut. If the end of the Bolt breaks through the plastic cap, call our Customer Service Department. Exposed threads on the end of the Bolt may cause serious injuries.

### SEC

#### 3.2

Attach **Truss Support Strips (AFP)** to the center of a **Truss Brace Channel (AFG)** (Truss Support Strips fit inside the Truss Brace Channel). Attach each end of the Truss Brace Channel to the **Truss Gutter Channels (AFH)** using the required hardware. Tighten all hardware.

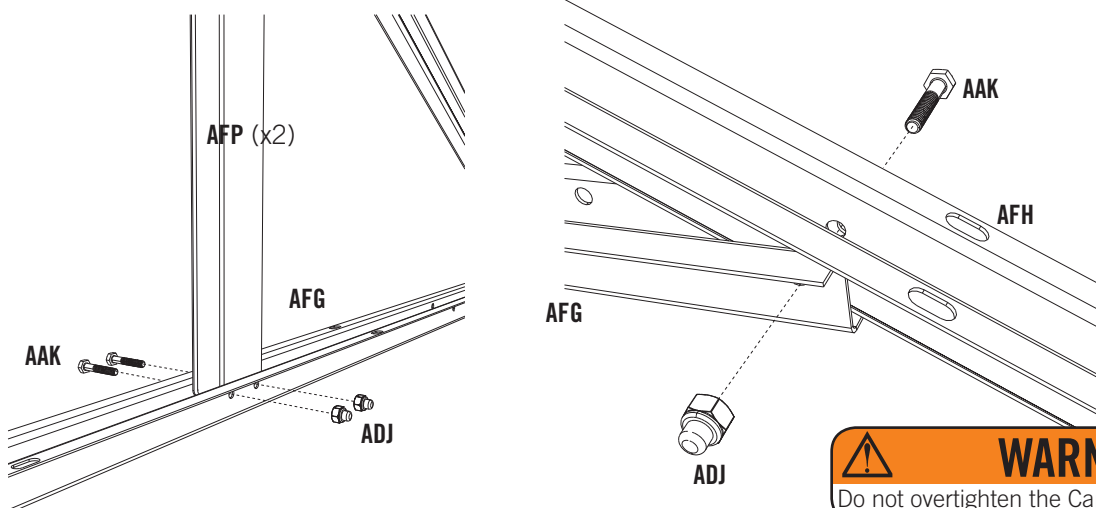

### WARNING

Do not overtighten the Cap Nut.




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 3




7/16" (x2)



AAK (x10)




ADJ (x10)

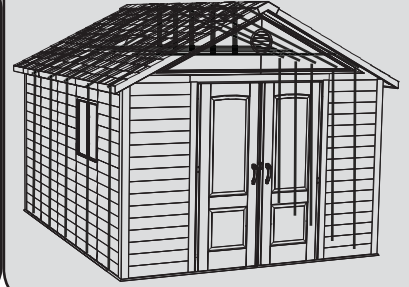


SEC

3.3

Attach Truss Assembly to two **Wall Support Channels (AFQ)** using **1/4" x 1 1/2" Hex Bolts (AAK)** and **1/4" Cap Nuts (ADJ)**. Do not completely tighten the Cap Nut until after Truss is secured to the Wall.

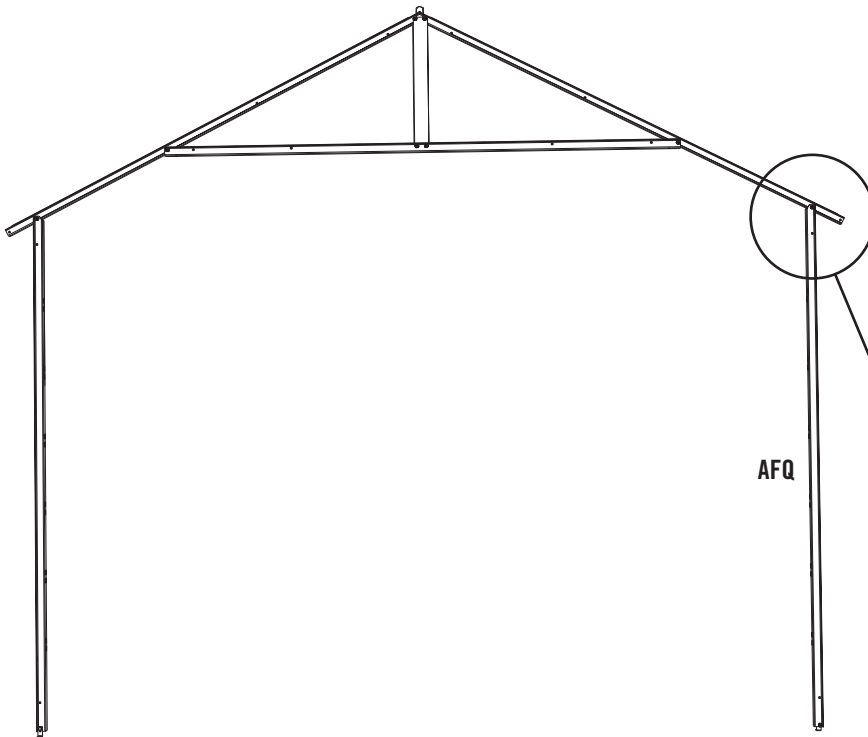

*Note: Only finger tighten hardware.*

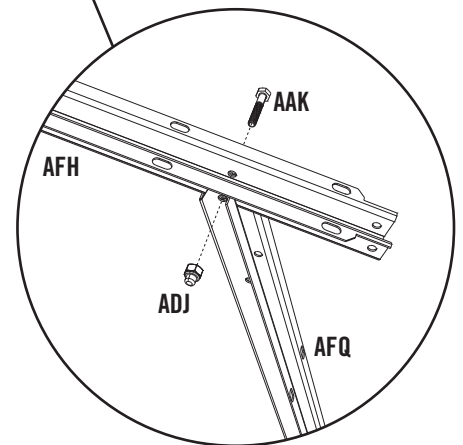

**WARNING**

Do not overtighten the Cap Nut.




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 3



7/16" (x2)




AAK (x10)



ADJ (x10)




AHT (x10)  
(Not to scale)

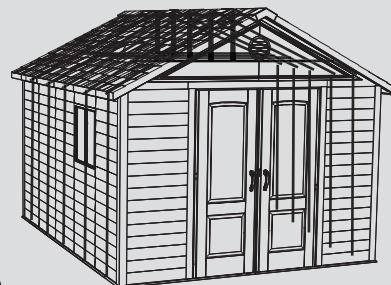

SEC

3.4


Attach one **Floor Bracket (AHT)** to the bottom of each Wall/Shelf Support Channel using the required hardware. Tighten all hardware. **Repeat this section for all Trusses.** You need only do this step if you plan to anchor your Shed. See the "Anchoring the Shed" step at the end of this Owner's Manual.

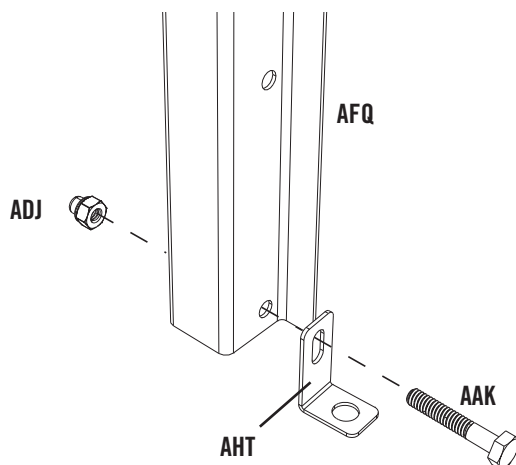

## SEC 4 WALL PANEL INSTALLATION

### HARDWARE REQUIRED


Hardware shown at actual size



**ADZ** (x116)  
1/4" x 5/8" Pan-Head Screw

### METAL PARTS REQUIRED


Part shown at 8% of actual size




**AFR** (x4)  
Corner Channel

### PLASTIC PARTS REQUIRED

Parts shown at 4% of actual size

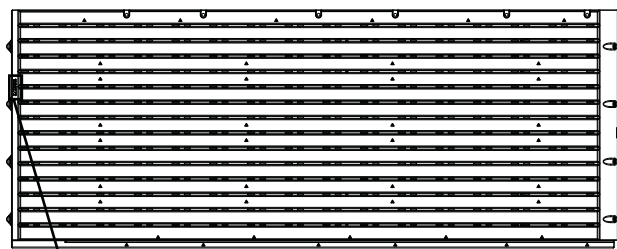


**AHD** (x14)  
Wall Panel

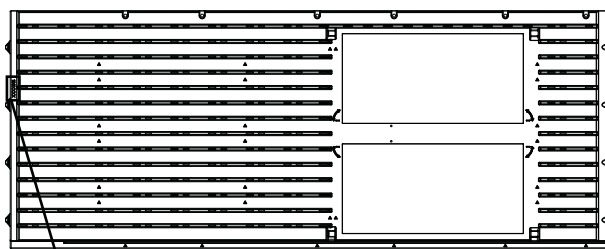

**AHH** (x2)  
Window Wall Panel

### TOOLS REQUIRED



#2 Phillips Screwdriver



3/8" Wrench



Safety Glasses






## TOOLS AND PARTS REQUIRED FOR THIS PAGE

SEC 4



NO HARDWARE REQUIRED FOR THIS PAGE

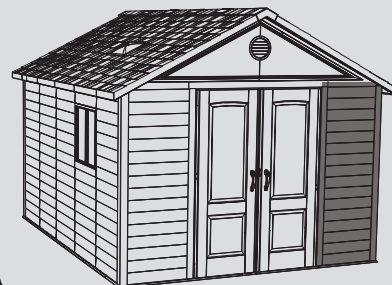


### 2 PEOPLE REQUIRED FOR ASSEMBLY

SEC

#### WALL ASSEMBLY

4.1


Lock a **Wall Panel (AHD)** into the front, right corner of the Floor by inserting the tabs at the bottom of the Wall Panel into the slots on the Floor. After inserting the tabs, slide the Wall Panel to the right as far as it will go.

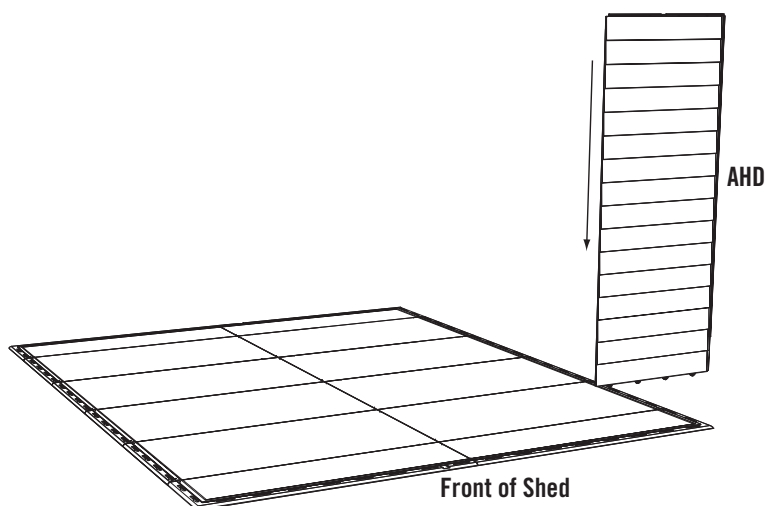

SEC



4.2

Lock a second **Wall Panel (AHD)** adjacent to the front along the right edge of the Floor by inserting the tabs at the bottom of the Wall Panel into the slots on the Floor. **The Window Wall Panel (AHH) may be inserted into any side Wall Panel position.** After inserting the tabs, slide the Wall Panel towards the front, right corner.

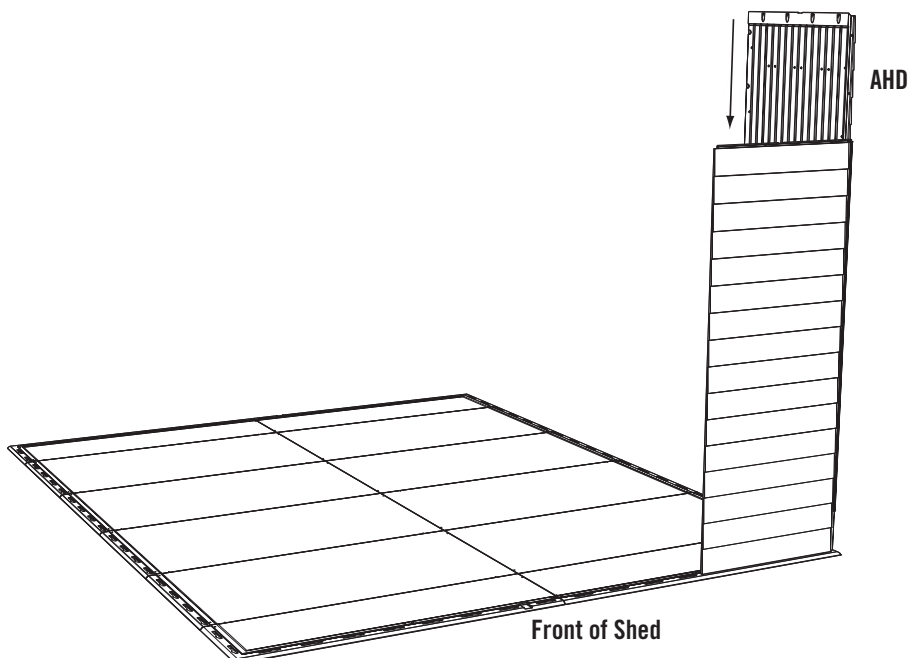




## TOOLS AND PARTS REQUIRED FOR THIS PAGE



ADZ (x36)


SEC 4

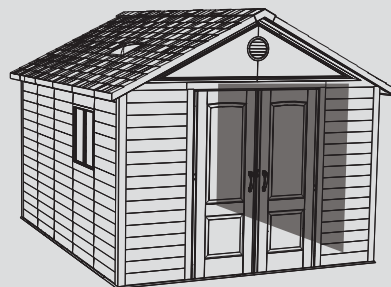

SEC

4.3

Align the holes in a **Corner Channel (AFR)** with the holes in two corner Wall Panels and secure the Corner Channel to the Wall Panels with twelve (12) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**.

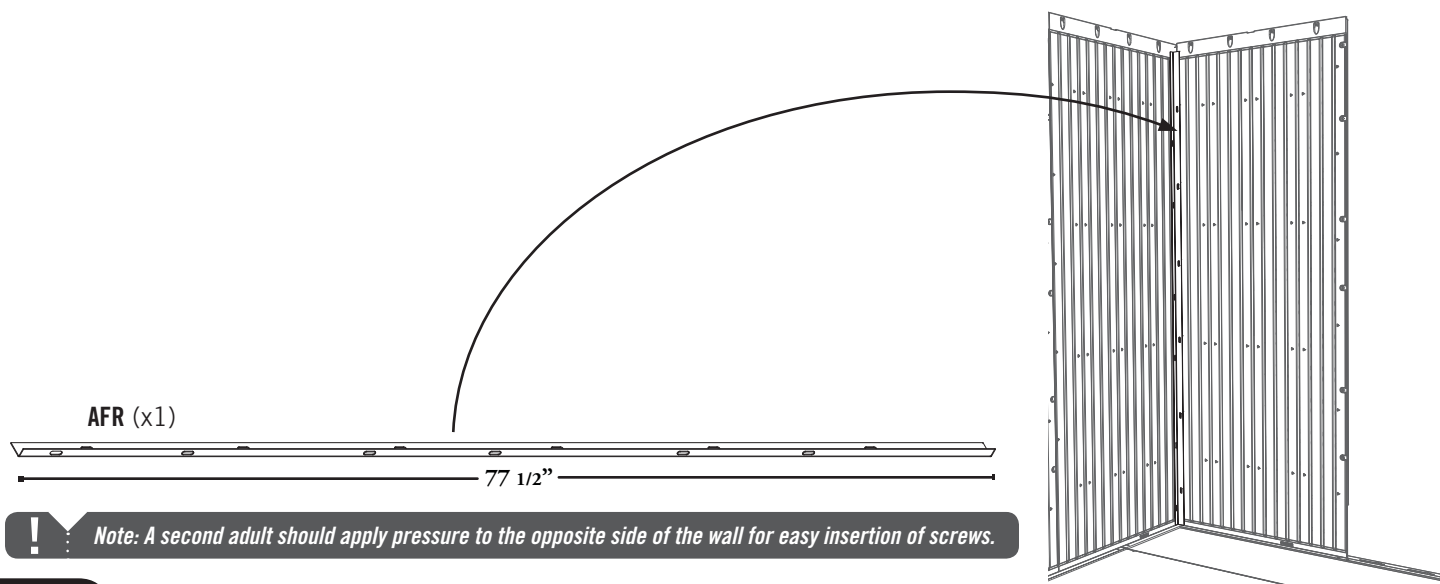


*Note: A second adult should apply pressure to the opposite side of the wall for easy insertion of screws.*

SEC



4.4

Insert one (1) **Window Wall Panel (AHH)** and three (3) **Wall Panels (AHD)** along the right edge of the Floor. **The Window Wall Panel (AHH)** may be inserted into any side Wall Panel position. Secure the Panels to one another using twenty-four (24) **1/4" x 5/8" Pan-Head Screws (ADZ)**.

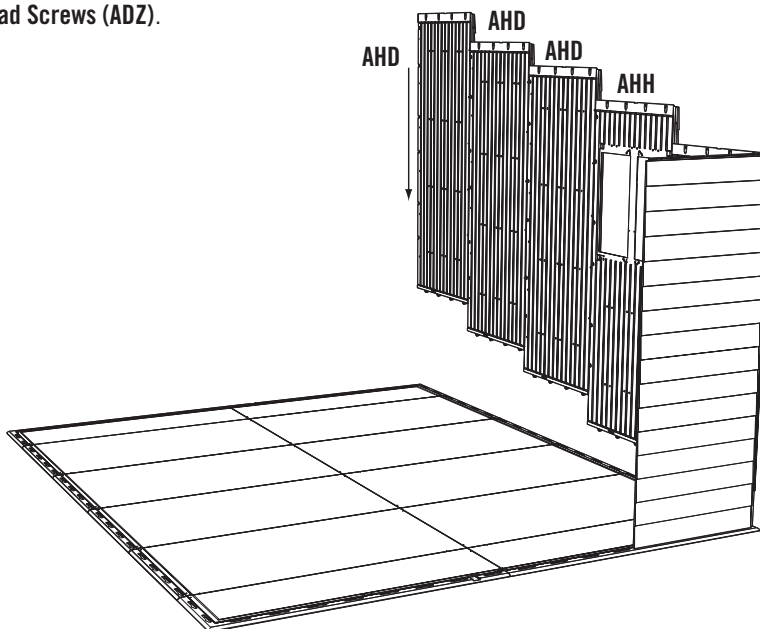




## TOOLS AND PARTS REQUIRED FOR THIS PAGE



ADZ (x66)


SEC 4

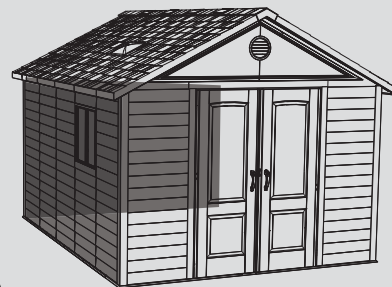

SEC

4.5


Insert four (4) **Wall Panels (AHD)** along the rear edge of the Floor. Secure the Panels and one (1) **Corner Wall Channel (AFR)** using twenty-four (24) **1/4" x 5/8" Pan-Head Screws (ADZ)**.

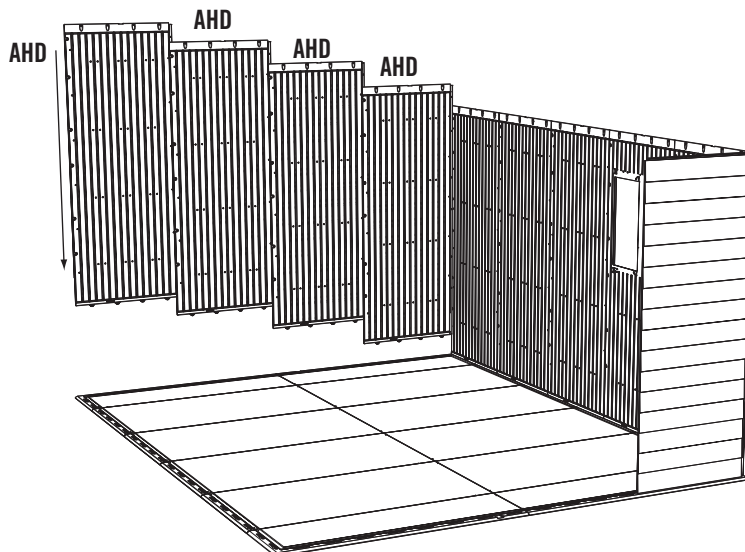

SEC

4.6



Insert three (3) **Wall Panels (AHD)** and one (1) **Window Wall Panel (AHH)** along the left edge of the Floor. **The Window Wall Panel (AHH) may be inserted into any side Wall Panel position.** Secure the Panels to one another using one (1) **Corner Wall Channel (AFR)** and thirty-six (36) **1/4" x 5/8" Pan-Head Screws (ADZ)**.

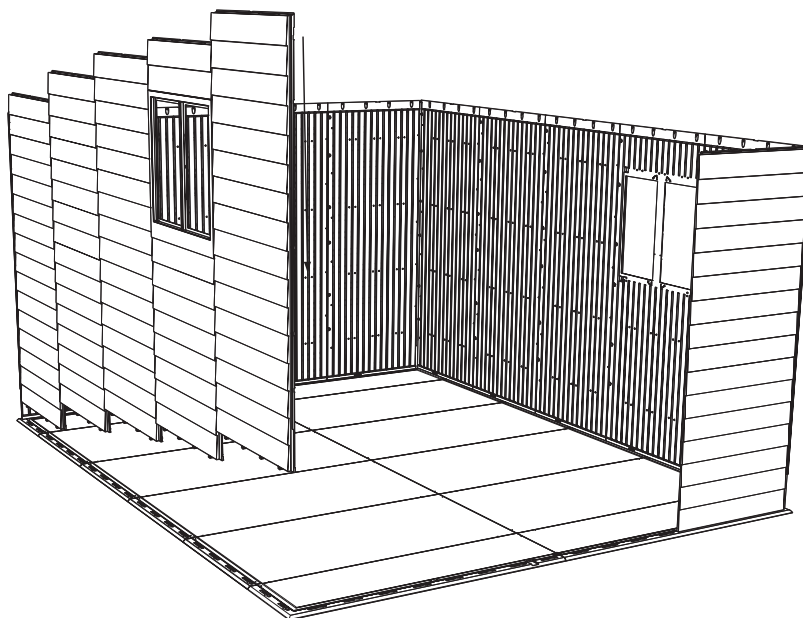

**!** Note: A second adult should apply pressure to the opposite side of the wall for easy insertion of screws.




## TOOLS AND PARTS REQUIRED FOR THIS PAGE



ADZ (x12)

SEC


4

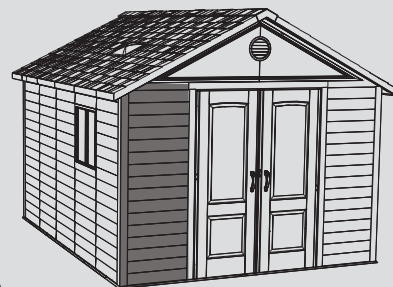

SEC

4.7

Lock the last **Wall Panel (AHD)** into the front, left corner of the Floor by inserting the tabs at the bottom of the Wall Panel into the slots on the Floor. After inserting the tabs, slide the Wall Panel to the left as far as it will go. Secure the Panel to the Wall using one (1) **Corner Wall Channel (AFR)** and twelve (12) **1/4" x 5/8" Pan-Head Screws (ADZ)**.

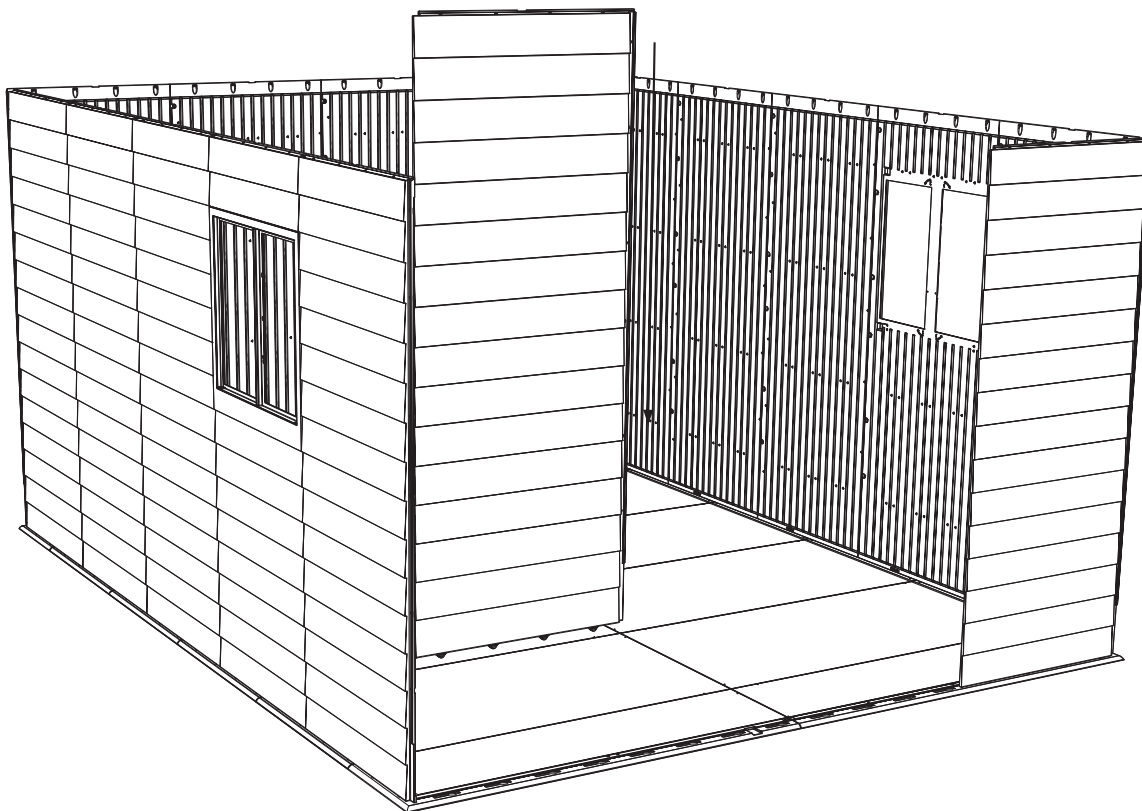


*Note: A second adult should apply pressure to the opposite side of the wall for easy insertion of screws.*


## SEC 5 TRUSS & WALL/SHELF SUPPORT CHANNEL INSTALLATION

### HARDWARE REQUIRED

Hardware shown at actual size (\*Unless noted otherwise)



**ADZ** (x128)  
1/4" x 5/8" Pan-Head Screw  
(Not all screws are used)



**AAK** (x18)  
1/4" x 1 1/2" Pan-Head Screw



**ADJ** (x18)  
1/4" Cap Nut




**\*AHT** (x6)  
Floor Bracket

### METAL PARTS REQUIRED


Parts illustrated at 8% of the actual size



**AFQ** (x6)  
Wall/Shelf Support Channel




**AFJ** (x2)  
Long Wall/Shelf Support Channel Extension



**AFN** (x4)  
Short Wall/Shelf Support Channel Extension

Part not illustrated at any specific size

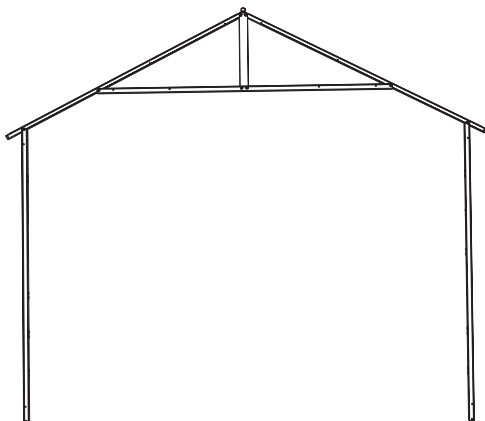


**Truss Assembly** (x5)


### PLASTIC PARTS REQUIRED

**NO PLASTIC PARTS REQUIRED IN THIS SECTION**

### TOOLS REQUIRED





**Phillips Screwdriver**



**Safety Glasses**




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x76)

SEC 5



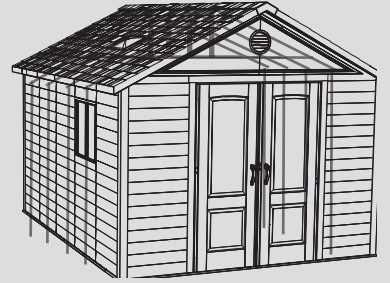


### SEC

#### 5.1

### TRUSS INSTALLATION

Starting at the back of the shed, secure a Truss Assembly to the center of the Wall Panels on the left and right Walls with sixteen (16) 1/4" x 5/8" Pan-Head Screws (ADZ). Repeat this step for each Truss Assembly. The Window Wall Panels only use six (6) 1/4" x 5/8" Pan-Head Screws (ADZ) each.

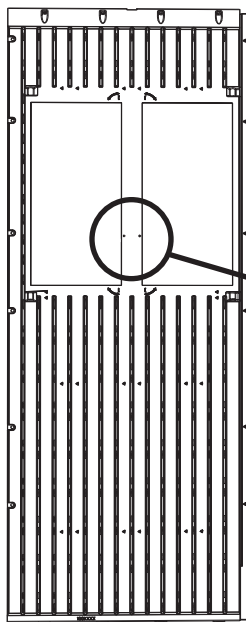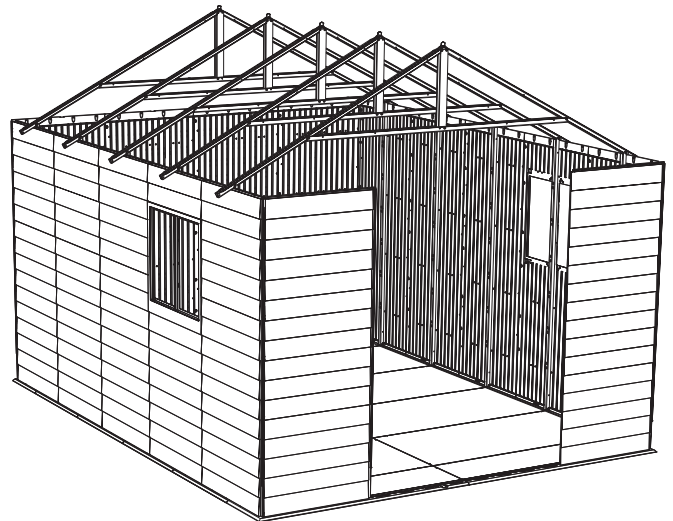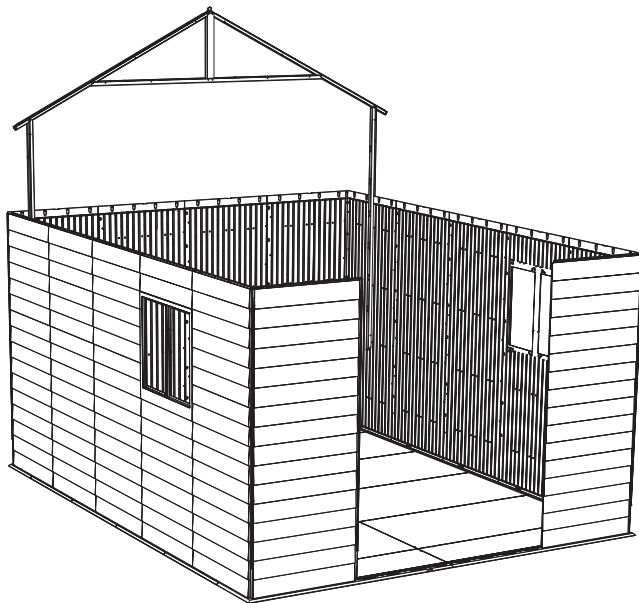

Do not insert any 1/4" x 5/8" Pan-Head Screws (ADZ) through these two holes in the two Window Wall Panels. These two holes are used later on in the Window Assembly and Installation Section.




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 5




7/16" (x2)



AAK (x12)



ADJ (x12)

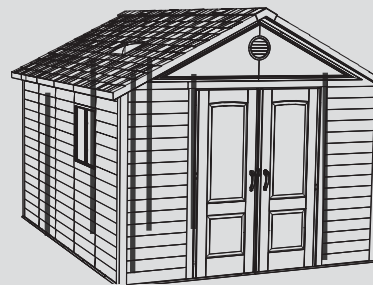


SEC

5.2


### SHORT WALL SUPPORT CHANNEL EXTENSION ASSEMBLY

Slide a **Short Wall Support Channel Extension (AFN)** into the top of a **Wall Support Channel (AFQ)** and secure with two (2) 1/4" x 1 1/2" Hex Bolts (AAK) and two (2) 1/4" Cap Nuts (ADJ). Repeat this step for the remaining three Short Wall Support Extensions.

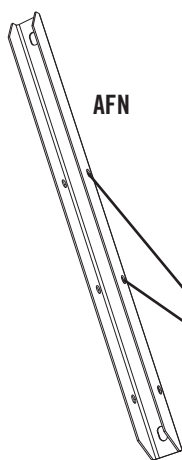

AFN

Use these two holes

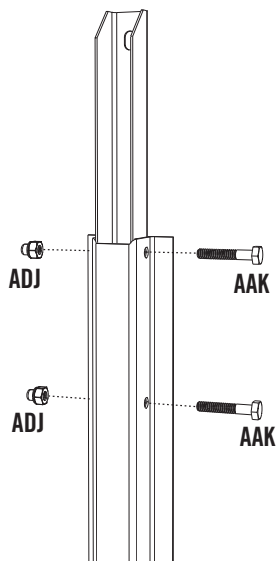


SEC


5.3

### LONG WALL SUPPORT CHANNEL EXTENSION ASSEMBLY

Slide a **Long Wall Support Channel Extension (AFJ)** into the top of a **Wall Support Channel (AFQ)** and secure with two (2) 1/4" x 1 1/2" Hex Bolts (AAK) and two (2) 1/4" Cap Nuts (ADJ). Repeat this step for the remaining Long Wall Support Extensions.

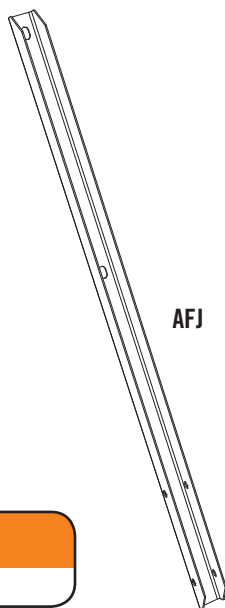

AFJ

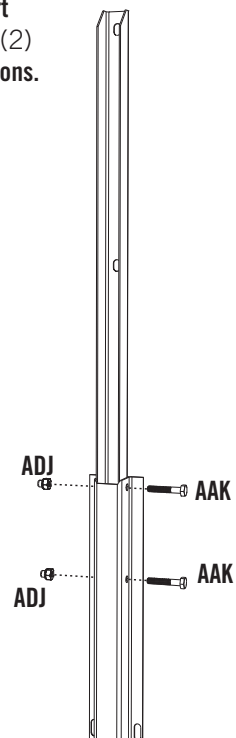

## WARNING

Do not overtighten the Cap Nut.






## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 5



7/16" (x2)




AAK (x6)



ADJ (x6)




AHT (x6)  
(Not to scale)

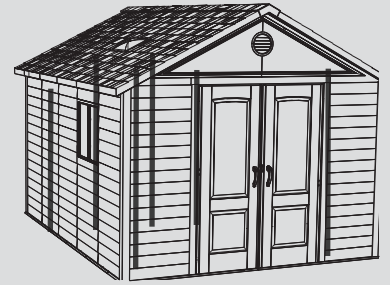

SEC

5.4

Attach one **Floor Bracket (AHT)** to the bottom of each Wall Support Channel. Tighten all hardware. **Repeat this section for all Trusses.** You need only do this step if you plan to anchor your Shed. See the "Anchoring the Shed" step at the end of your Owner's Manual.

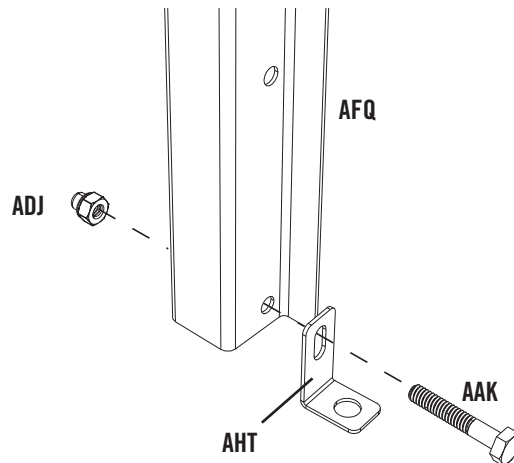



**WARNING**

Do not overtighten the Cap Nut.






## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x16)

SEC 5

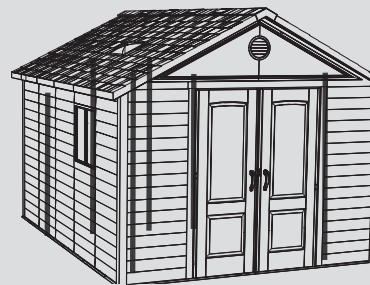


SEC

5.5

### FRONT WALL SUPPORT CHANNEL INSTALLATION

Using the middle set of eight pre-made holes in the Left, Front Wall Panel, secure a Short Wall Support Channel Assembly to the Left, Front Wall Panel using eight (8) 1/4" x 5/8" Pan-Head Screws (ADZ). Repeat this step for the Right, Front Wall Panel.



Middle set of eight pre-made holes

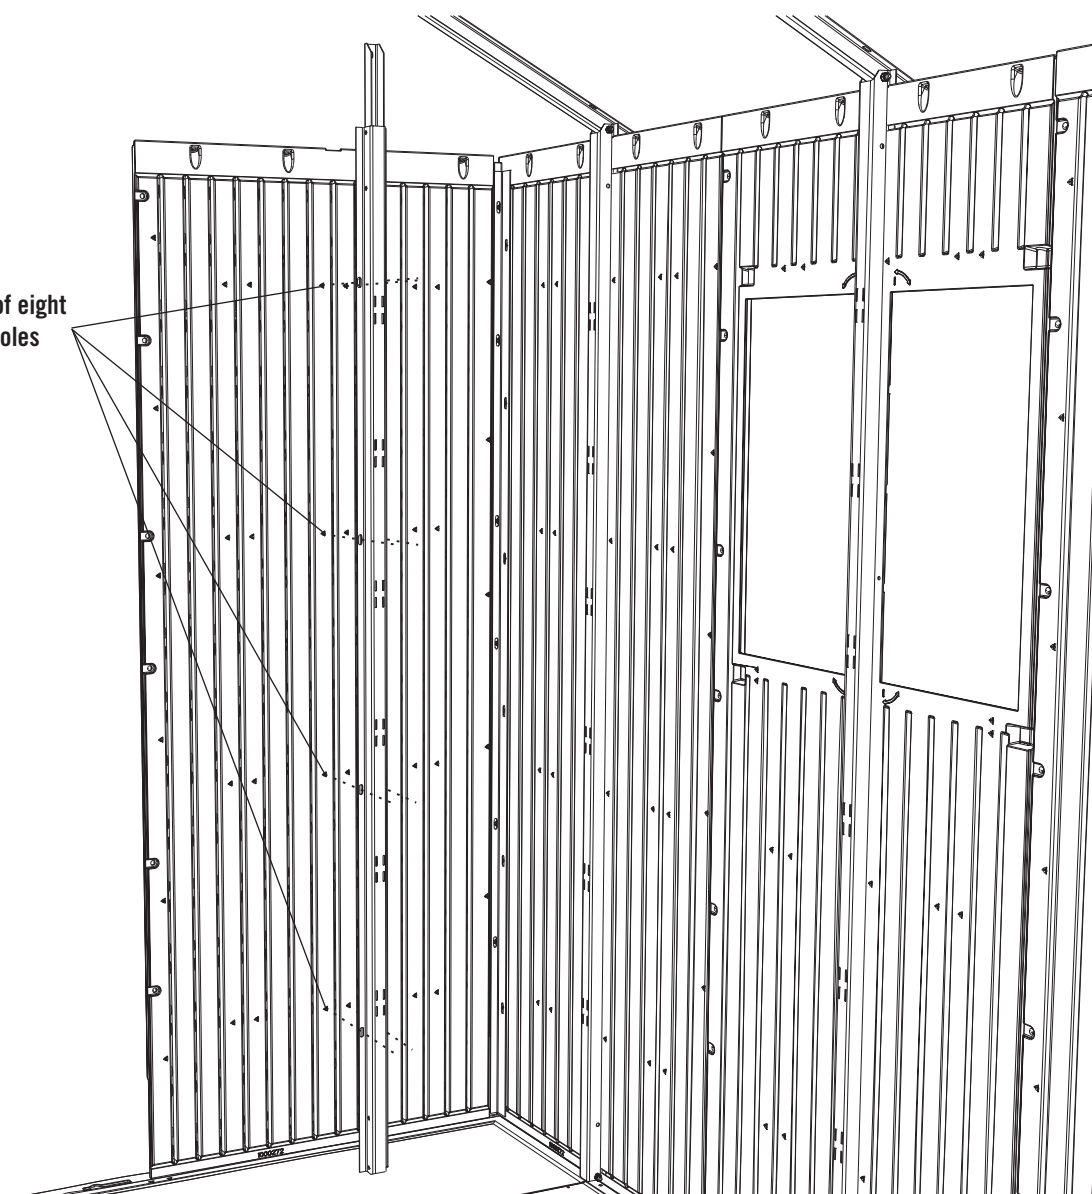

Interior View




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x32)

SEC 5

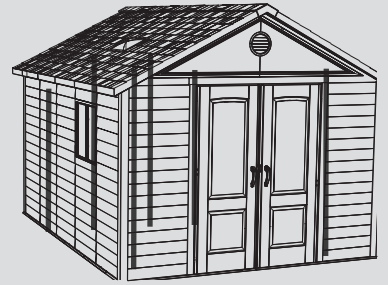


SEC

5.6

### REAR WALL SUPPORT CHANNEL INSTALLATION

Using the middle set of eight pre-made holes in the Right, Rear Wall Panel, secure a Short Wall Support Channel Assembly to the Right, Rear Wall Panel using eight (8)  $\frac{1}{4}$ " x  $\frac{5}{8}$ " Pan-Head Screws (ADZ). **Repeat this step for the Left, Rear Wall Panel.** Using the middle set of eight pre-made holes in the two Center, Rear Wall Panels, secure Long Wall Support Channel Assemblies to the Center, Rear Wall Panels using eight (8)  $\frac{1}{4}$ " x  $\frac{5}{8}$ " Pan-Head Screws (ADZ) for each Wall Support Channel Assembly.

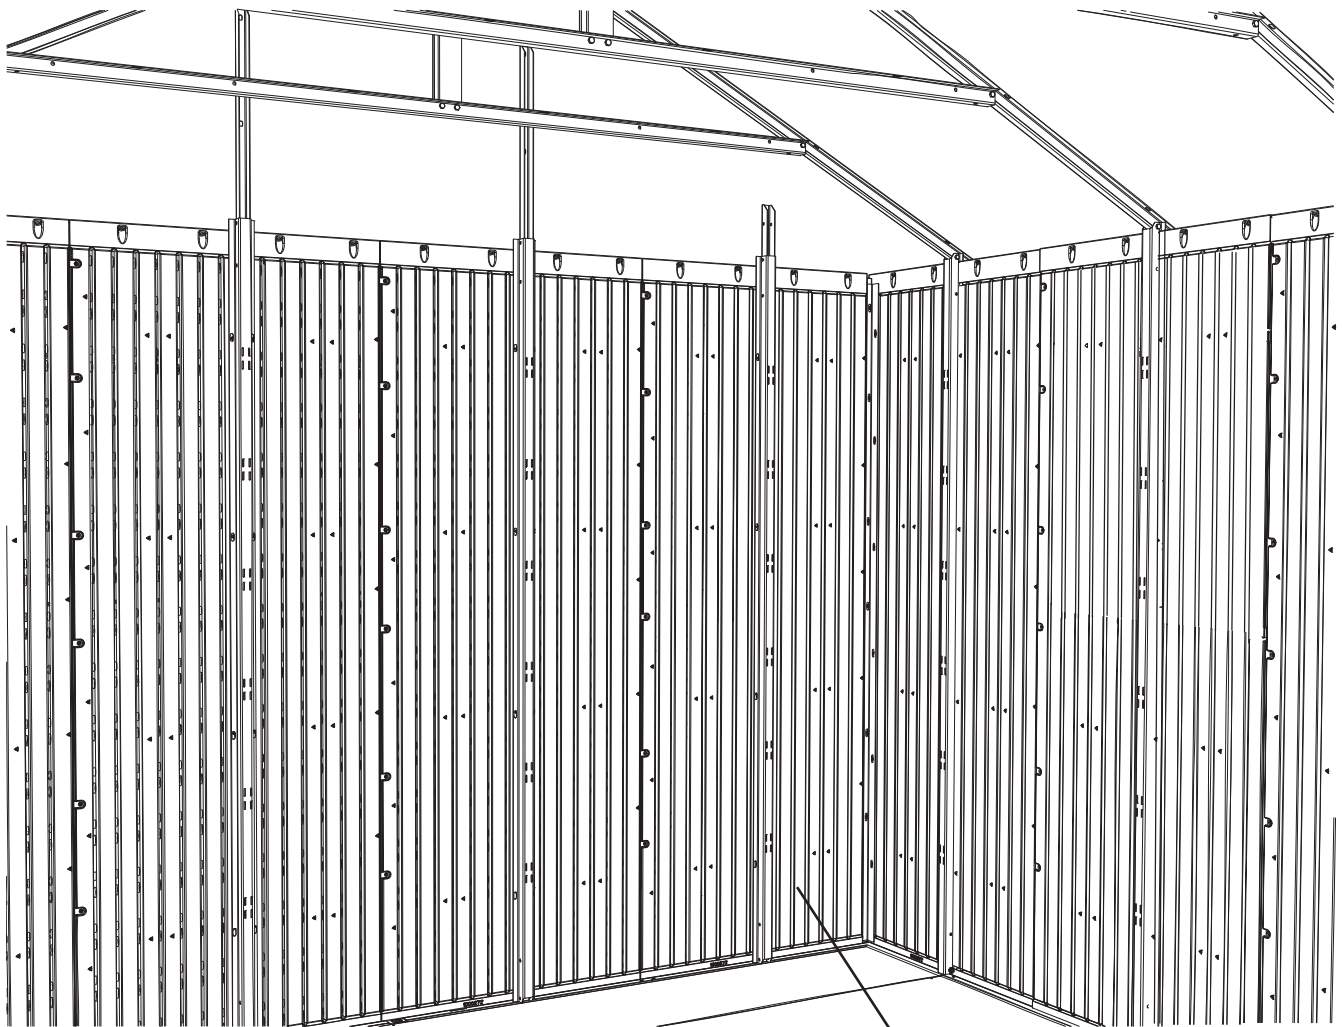


Interior View

Right, Rear Wall Panel


## SEC 6 LEFT DOOR ASSEMBLY

### HARDWARE REQUIRED


Hardware shown at of actual size



**ADZ** (x9)  
1/4" x 5/8" Pan-Head Screw




**ADW** (x3)  
#10 x 3/4" Phillips  
Pan-Head Screw



**ACH** (x2)  
1/4" x 1 1/2" Carriage Bolt



**ADJ** (x2)  
1/4" Cap Nut




**AEE** (x3)  
#10 x 1/2" Flat Washer


Hardware shown at 25% of actual size



**AHM** (x2)  
Deadbolt Latch



**AIB** (x1)  
Left Door Strike Plate



**AIA** (x1)  
Left Door Lock Bracket


Hardware shown at 15% of actual size




**AHZ** (x1)  
Left Door Handle

### METAL PARTS REQUIRED

Parts shown at 8% of actual size




**AFC** (x1)  
Door End Channel



**AFB** (x3)  
Door Brace

### PLASTIC PARTS REQUIRED

Part shown at 4% of actual size

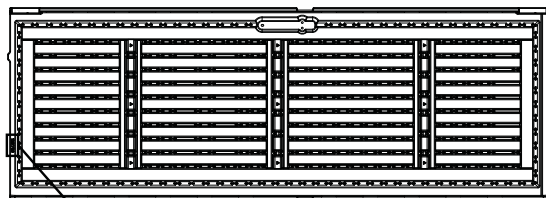

**1001790**  
**AGO** (x1) Left Door

### TOOLS REQUIRED



Phillips Screwdriver



7/16" Wrench




Safety Glasses




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 6



AHM (x2)

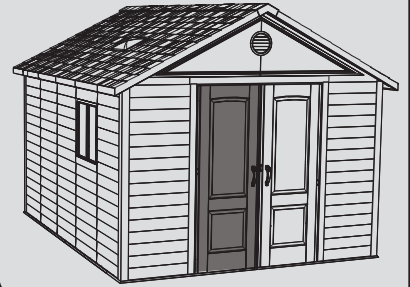


SEC

6.1

### LEFT DOOR ASSEMBLY



Rest **Left Door (AGO)** with front side down. Position **Deadbolt Latches (AHM)** in slots at top and bottom of Door then slide **Door End Channel (AFC)** onto the Door.

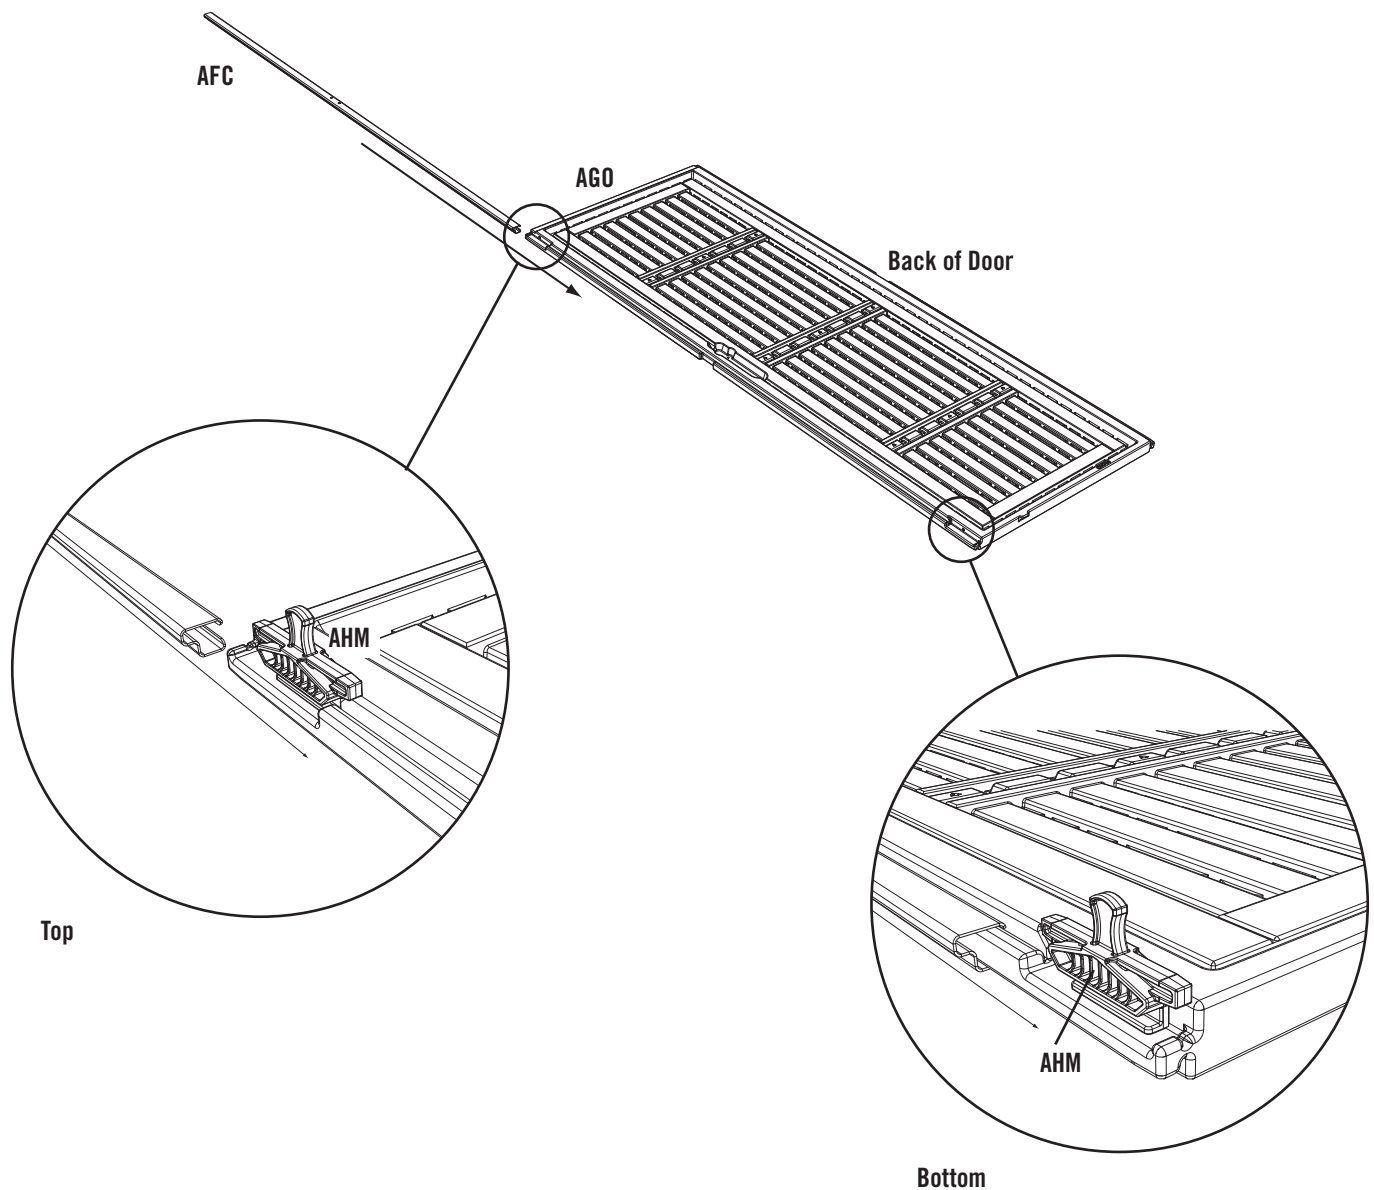


*Note: The Door End Channel fits onto Door with the flat side up (facing the Deadbolt Latches).*



## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




ADZ (x9)



AIB (x1)


SEC. 6

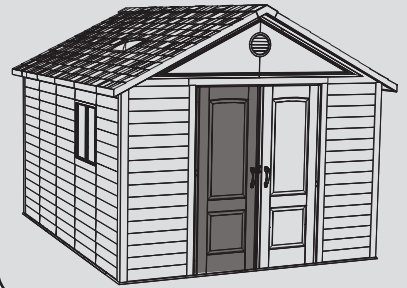

SEC

6.2


Attach three **Door Braces (AFB)** to the back of the Door with **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**.

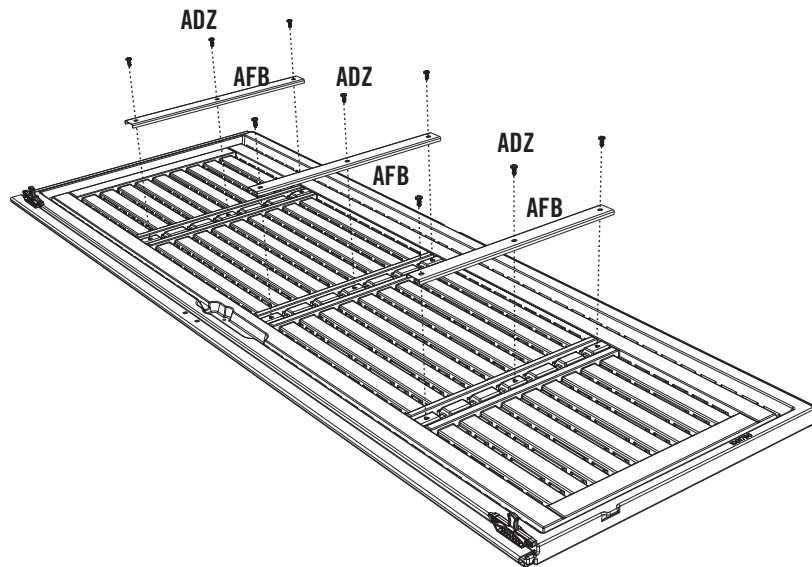

SEC

6.3

Slip the **Left Door Strike Plate (AIB)** over the Left Door and align the holes.

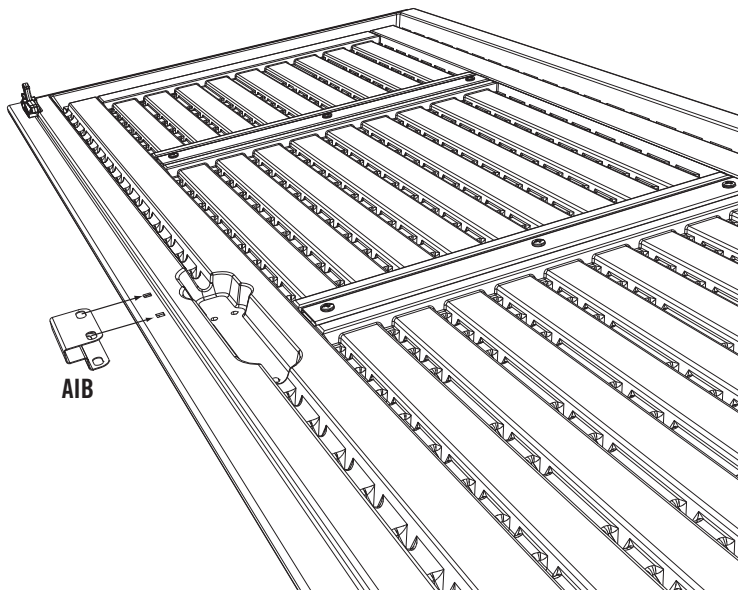


*Note: You may need to nudge the Door End Channel to make these holes line up with the gap in the Door.*






## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




7/16"




ACH (x2)




ADJ (x2)




AHZ (x1)




AIA (x1)



ADW (x3)



AEE (x3)

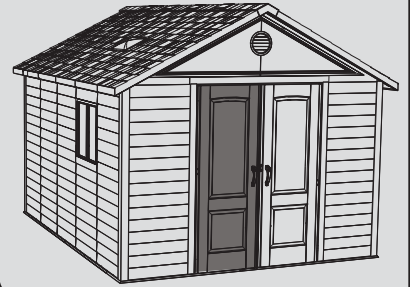


SEC 6

SEC

6.4


Attach the **Left Door Lock Bracket (AIA)** to the Strike Plate with two (2) 1/4" x 1 1/2" **Carriage Bolts (ACH)** and two (2) 1/4" **Cap Nuts (ADJ)**.

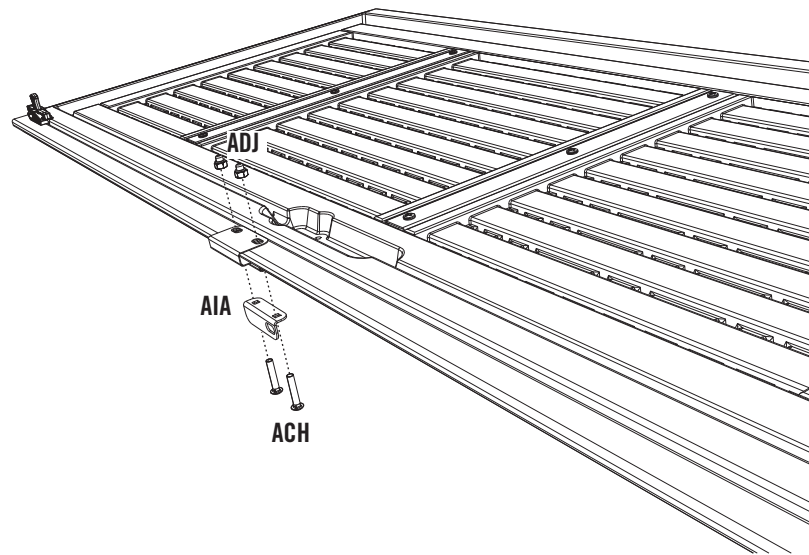

SEC

6.5


Attach the **Left Door Handle (AHZ)** using three (3) #10 x 1/2" **Flat Washers (AEE)** and three (3) #10 x 3/4" **Pan-Head Screws (ADW)**.

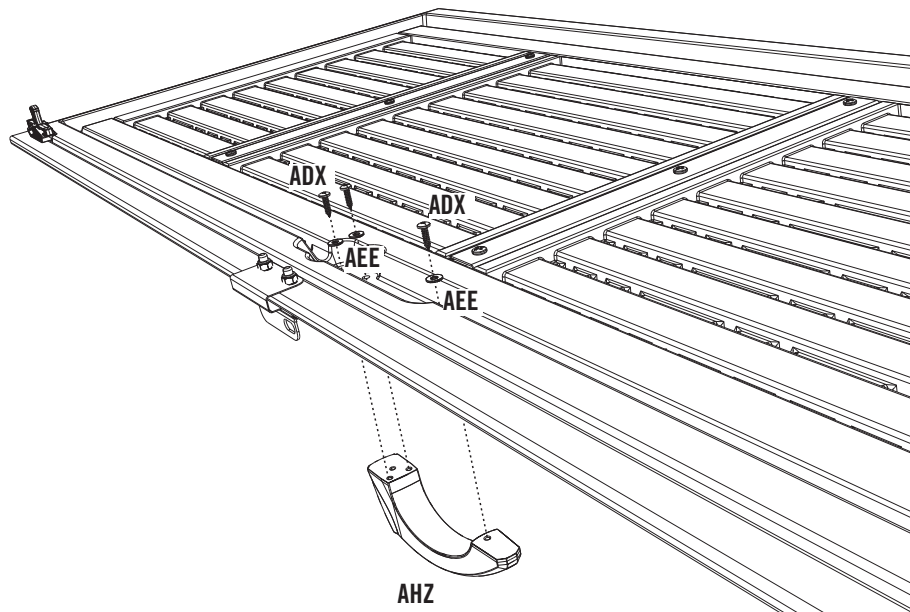


## SEC 7 RIGHT DOOR ASSEMBLY

### HARDWARE REQUIRED


Hardware shown at of actual size



**ADZ (x9)**  
1/4" x 5/8" Pan-Head Screw




**ADW (x4)**  
#10 x 3/4" Pan-Head Screw




**AEE (x3)**  
#10 x 1/2" Flat Washer




**ADB (x2)**  
3/8" x 1/2" Steel Spacer




**AHY (x1)**  
Latch Spring



**ACI (x2)**  
1/4" x 2" Carriage Bolt




**AAB (x2)**  
1/4" Centerlock Nut




**AEB (x2)**  
1/4" Flat Washer


Hardware shown at 25% of actual size



**AIO (x1)**  
Thumb Lever



**AHV (x1)**  
Door Latch




**AIL (x1)**  
Right Door Lock Bracket




**AHX (x1)**  
Latch Cover Plate

Hardware shown at 15% of actual size



**AIK (x1)**  
Right Door Handle


Hardware shown at 50% of actual size




**AHW (x1)**  
Latch Block

### METAL PARTS REQUIRED

Parts shown at 8% of actual size




**AFC (x1)**  
Door End Channel



**AFB (x3)**  
Door Brace


### PLASTIC PARTS REQUIRED

Part shown at 4% of actual size

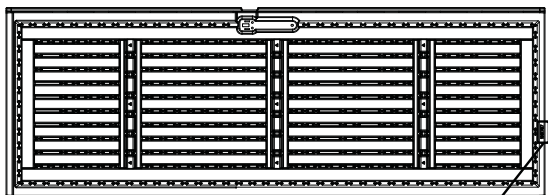

**AGZ (x1)**  
Right Door


### TOOLS REQUIRED



Phillips Screwdriver



7/16" Wrench



Pliers



Safety Glasses




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



NO HARDWARE REQUIRED FOR THIS PAGE

SEC. 7

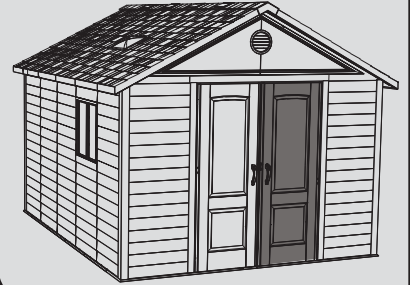


SEC

7.1

### RIGHT DOOR ASSEMBLY



Rest **Right Door (AGZ)** with front side down, then slide **Door End Channel (AFC)** onto the Door.

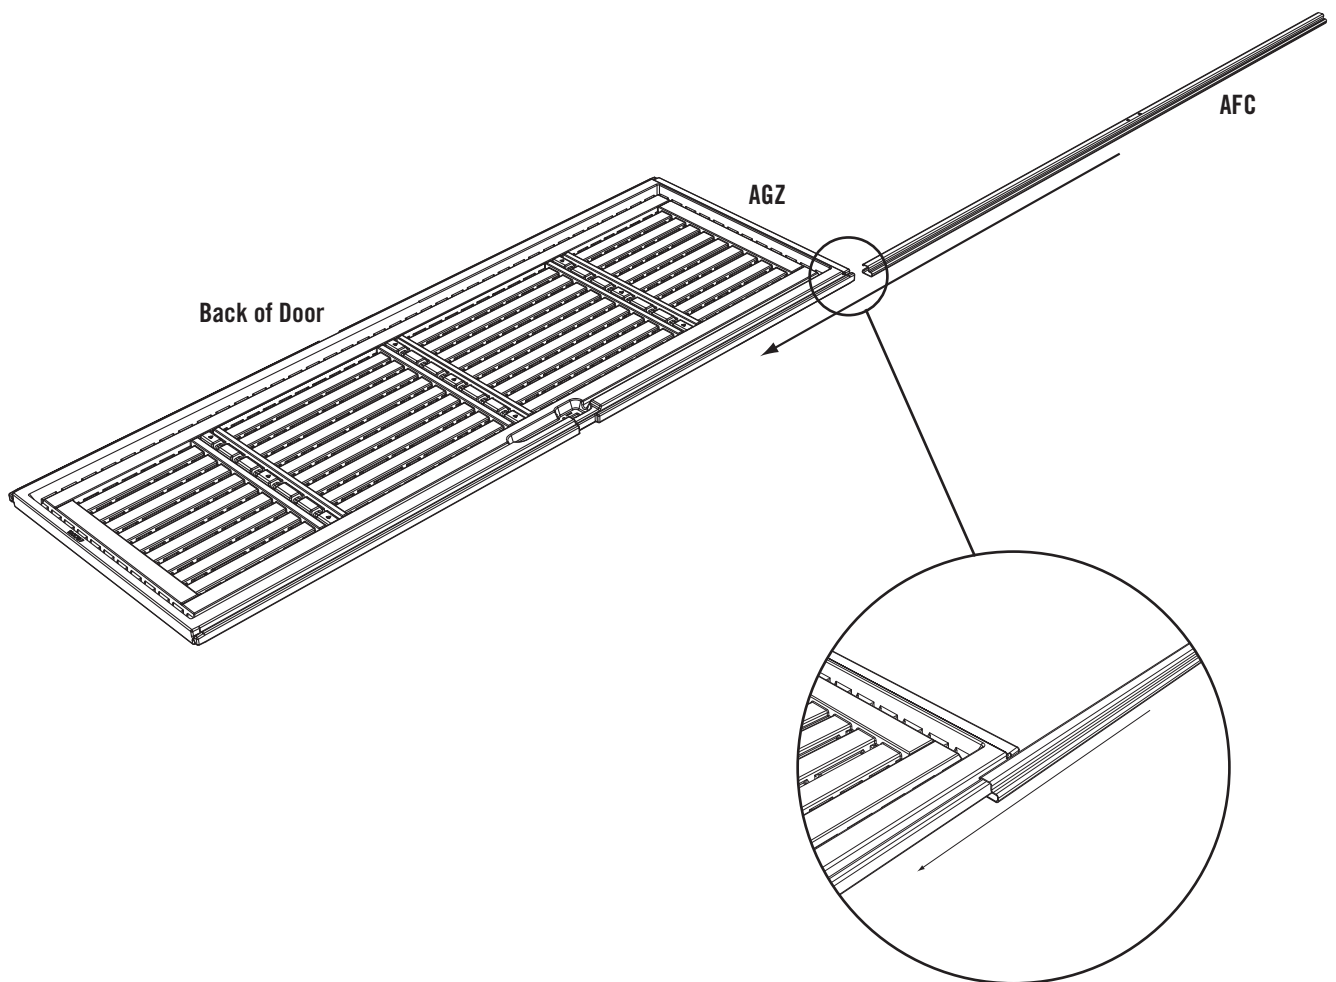







## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (9)




AIO (x1)



AIK (x1)


SEC. 7

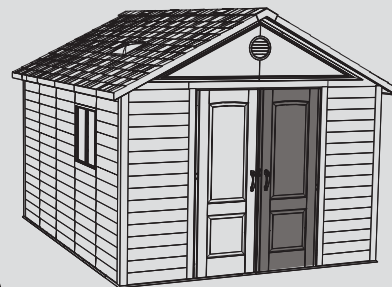

SEC

7.2


Attach three **Door Braces (AFB)** to the back of the Door with nine (9) 1/4" x 5/8" Phillips Pan-Head Screws (ADZ).

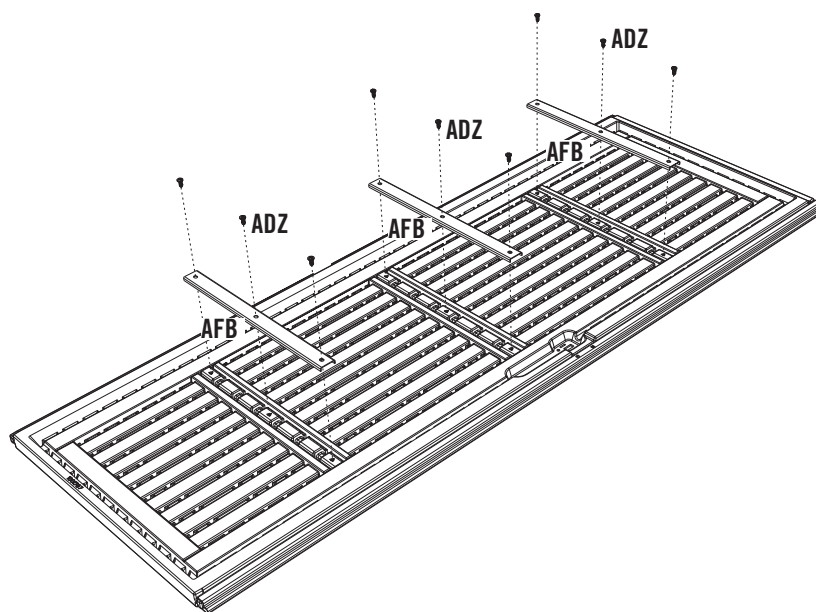

SEC


7.3

Fit the **Thumb Lever (AIO)** knobs into the grooves in the **Right Door Handle (AIK)**.


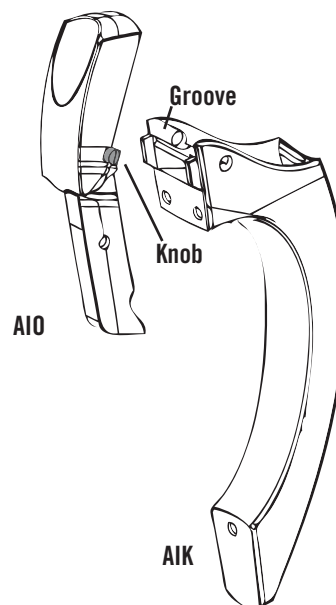




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




AEE (x3)



ADW (x3)


SEC 7

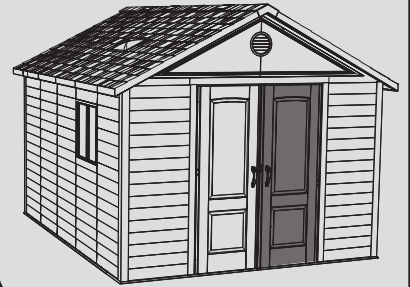

SEC

7.4


Rotate the Thumb Lever into the Handle. Slide forward until the Knobs fit into the holes in the Handle.

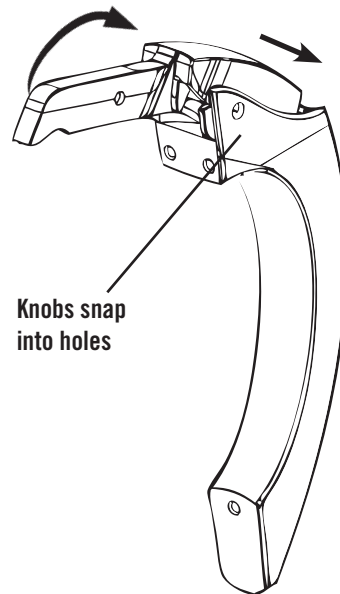

SEC


7.5

Attach the Handle and Thumb Lever to the Door using the required hardware.

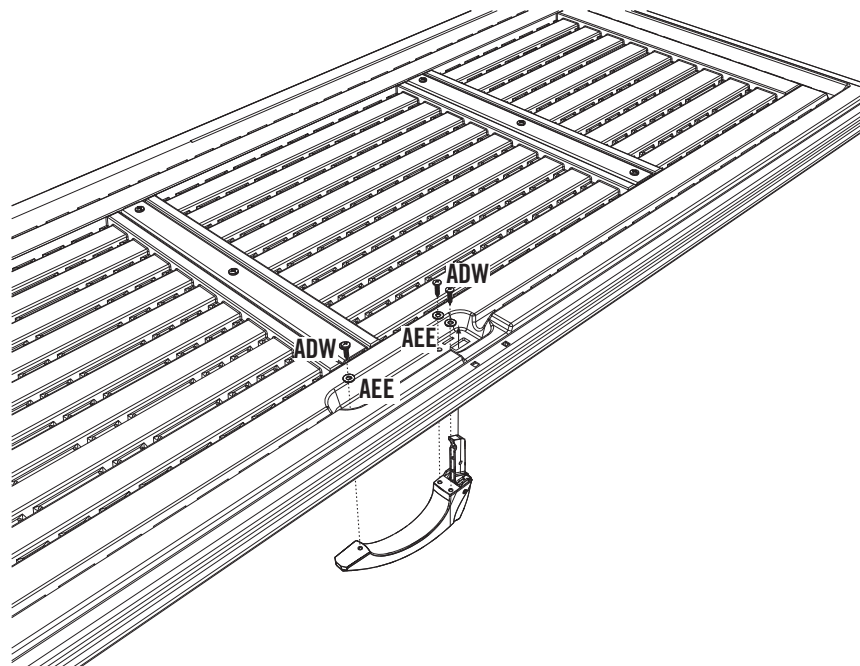





## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




7/16"



**AHX** (x1)  
(Not to scale)




**AHV** (x1)  
(Not to scale)




**AAB** (x2)



**AEB** (x2)



**ACI** (x2)




**AIL** (x1)  
(Not to scale)



**ADB** (x2)


SEC 7

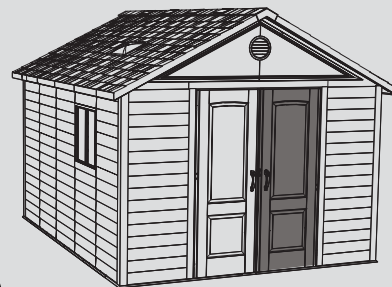

SEC



7.6

Connect the Right Door Handle to the Right Door using the hardware shown. Tighten all hardware.

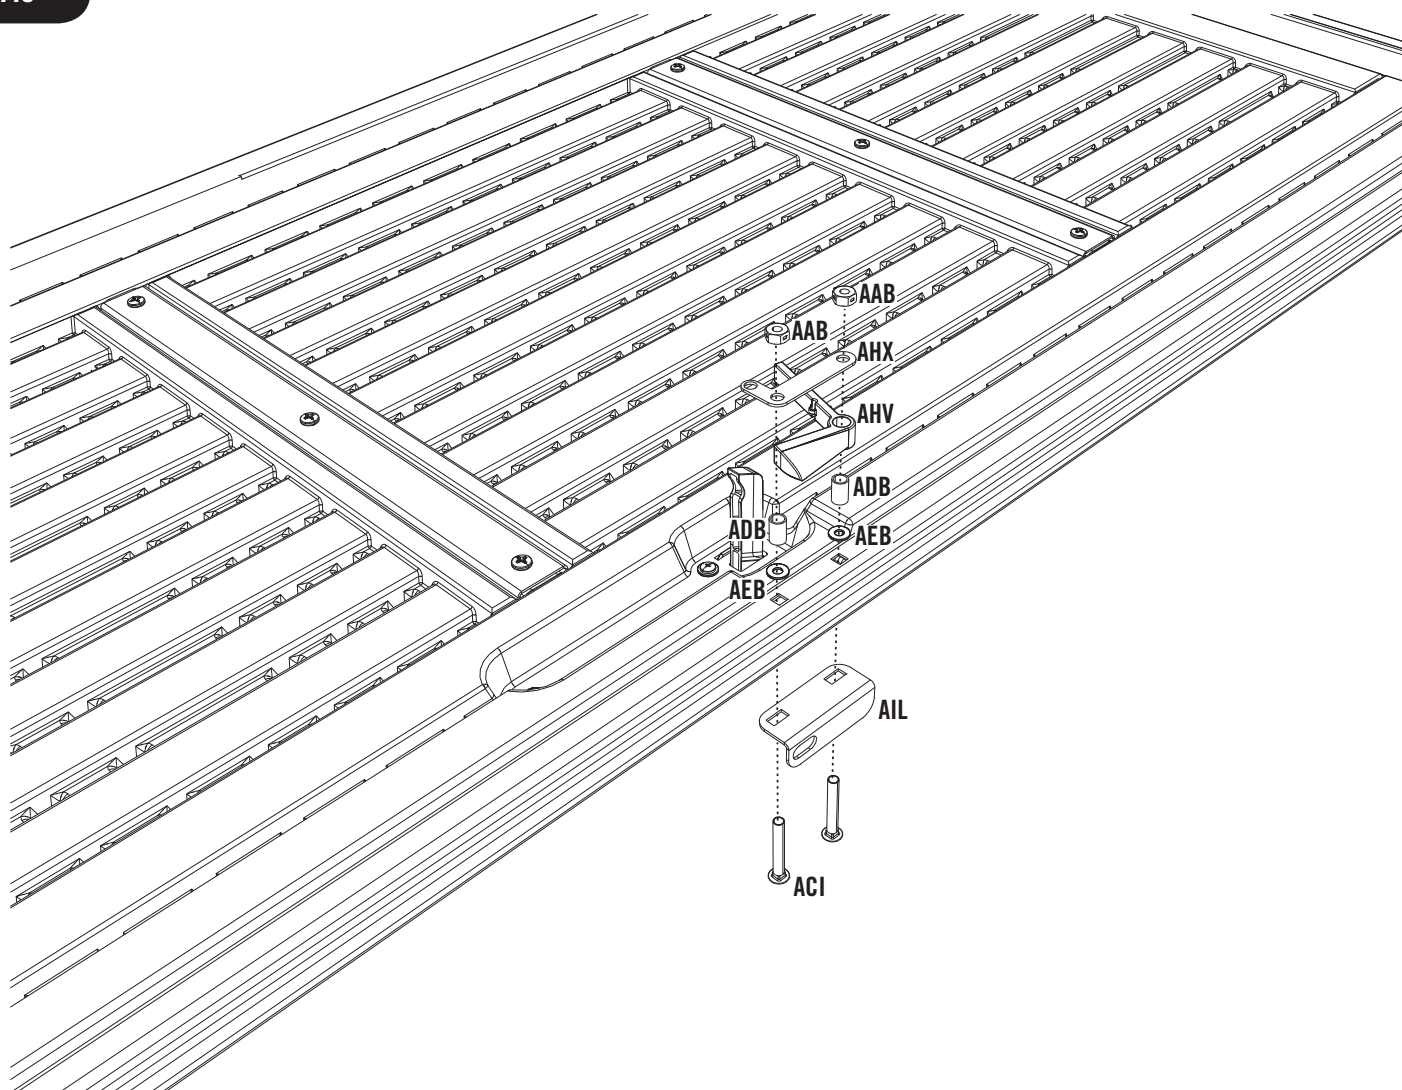





## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



AHY (x1)




ADW (x1)



AHW (x1)  
(Not to scale)


SEC. 7

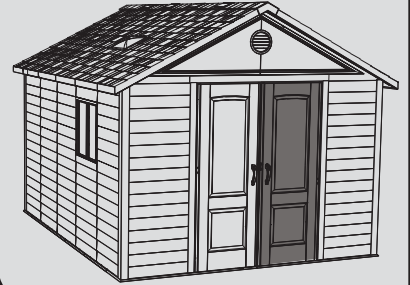

SEC

7.7

Line up the hole in the **Latch Block (AHW)** with the hole in the **Thumb Lever (AIO)**, and secure in place with a **#10 x 3/4" Phillips Pan-Head Screw (ADW)**.

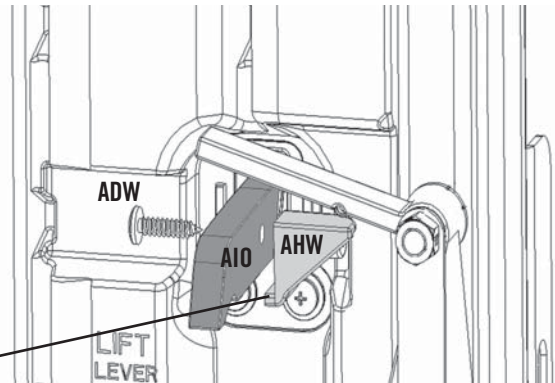


*Note: The lip of the Latch Block (AHW) fits under the Thumb Lever (AIO).*

SEC

7.8

Attach **Latch Spring (AHY)** to handle assembly. Set the Door aside.

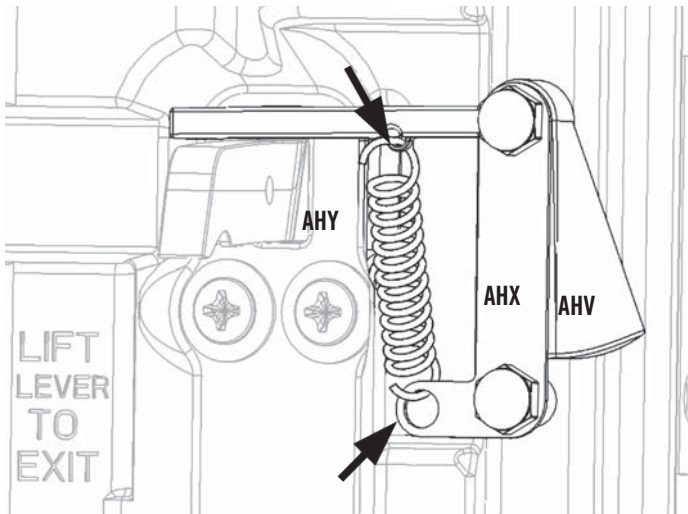

*Note: The Latch Block and Thumb Lever are not shown in this illustration in order to better show the correct placement of the Latch Spring.*



*Note: Use pliers to pull spring down and hook into bottom hole.*




## WARNING

While performing this step, each person should use protective eye glasses to help prevent serious eye injury.


## SEC 8 GABLE ASSEMBLY

### HARDWARE REQUIRED


Hardware shown at actual size



**AEE** (x10)  
#10 x 1/2" Flat Washer



**ADW** (x10)  
#10 x 3/4" Pan-Head Screw




**ADZ** (x8)  
1/4" x 5/8" Pan-Head Screw

### METAL PARTS REQUIRED


**NO METAL PARTS REQUIRED FOR THIS SECTION**

### PLASTIC PARTS REQUIRED

Parts shown at 4% of actual size

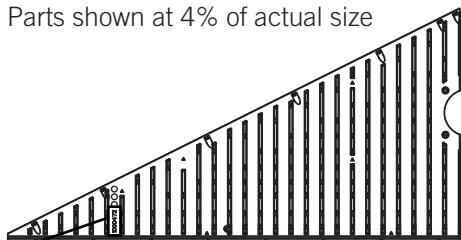


**1000472**  
**AGH** (x2)  
Gable Half 1

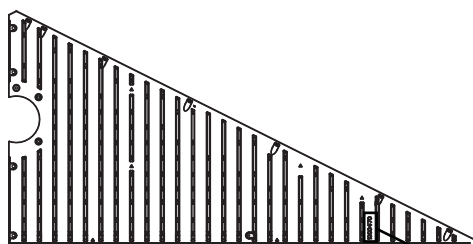


**AGI** (x2)  
Gable Half 2

Parts shown at 15% of actual size




**AGP** (x2)  
Louvered Vent



**AIQ** (x2)  
Vent Screen

### TOOLS REQUIRED



**Phillips Screwdriver**





**Safety Glasses**






## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x8)

SEC. 8

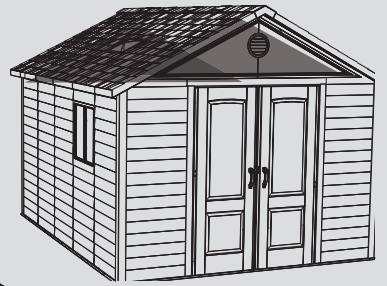


### SEC

#### 8.1

### GABLE ASSEMBLY


Set the edge of **Gable Half 2 (AGI)** over the edge of **Gable Half 1 (AGH)** as shown.

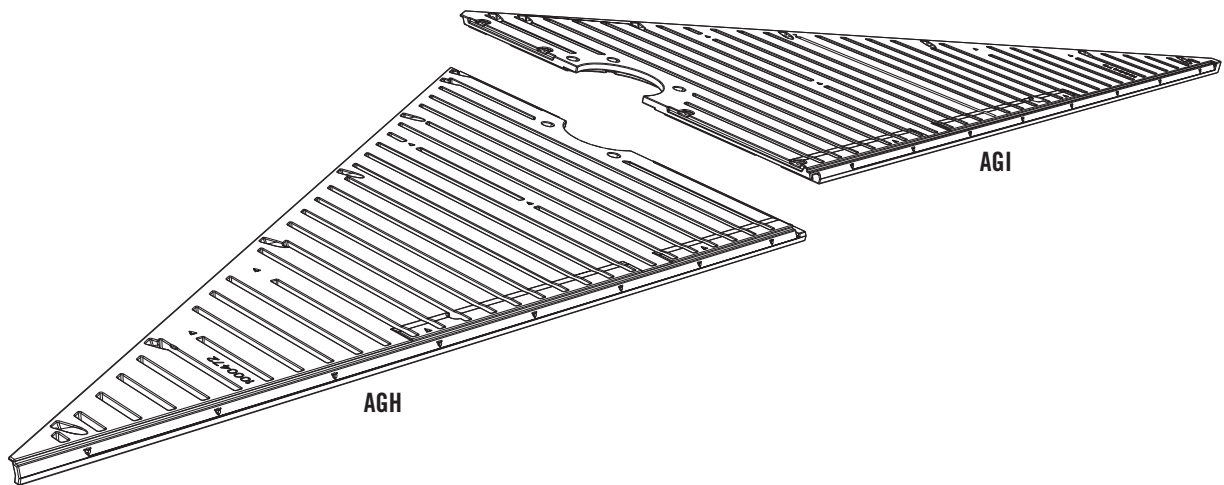

### SEC



#### 8.2

Secure the two Gable Halves together using four (4) 1/4" x 5/8" Pan-Head Screws (ADZ).

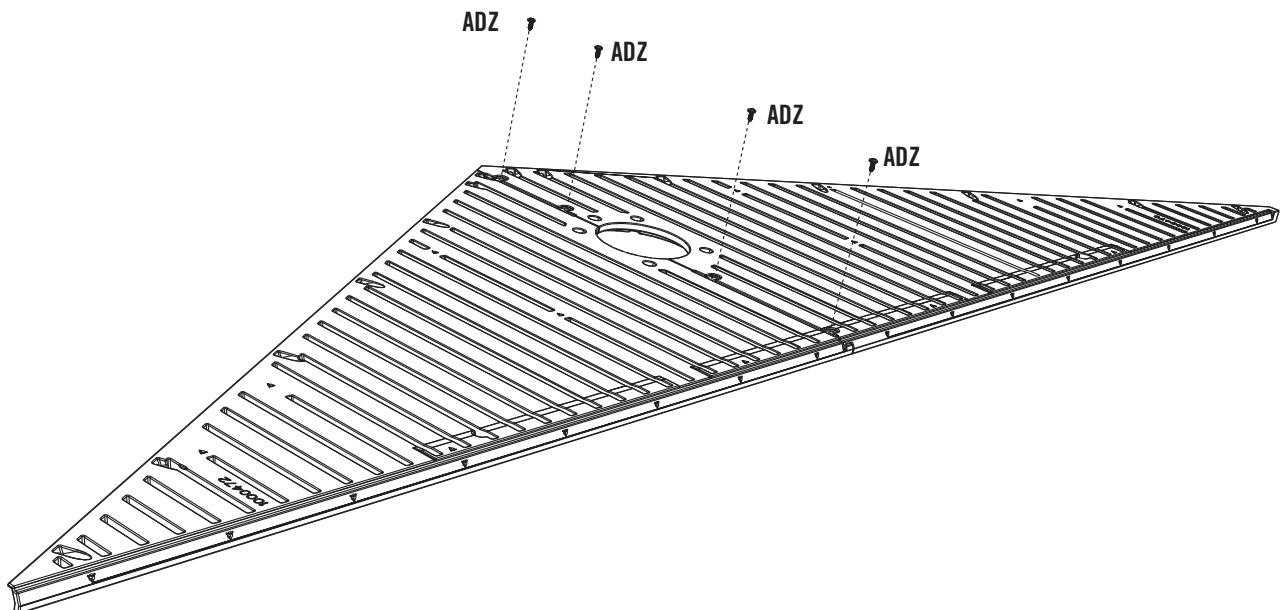



## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




AEE (x10)



ADW (x10)


SEC 8

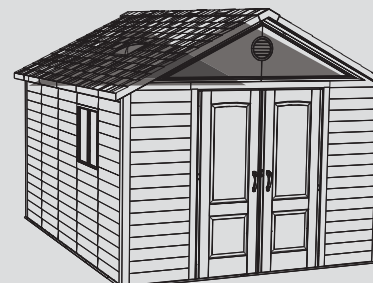

SEC

8.3


Attach the **Louvered Vent (AGP)** and **Vent Screen (AIQ)** to the Gable Assembly using five (5) **#10 x 1/2" Flat Washers (AEE)** and five (5) **#10 x 3/4" Phillips Pan-Head Screws (ADW)**. Set the Gable Assembly aside until later. Repeat this section for the second Gable.

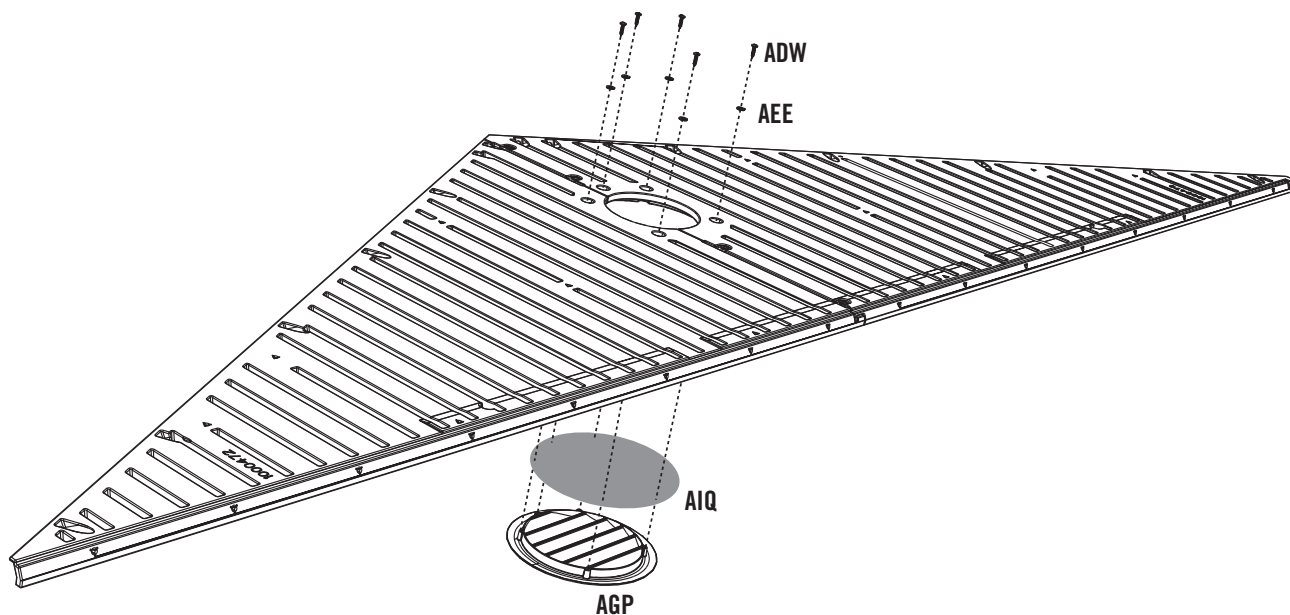

## SEC 9 DOMED SKYLIGHT ASSEMBLY

### HARDWARE REQUIRED


Hardware shown at actual size (\*Unless noted otherwise)



**ACR** (x24)  
#10 x 5/8" Carriage Bolt



**ADK** (24)  
#10 Cap Nut



**AEE** (24)  
#10 x 1/2" Flat Washer




**\*AHI** (x2)  
Butyl Tape

### METAL PARTS REQUIRED

NO METAL PARTS REQUIRED FOR THIS SECTION

### PLASTIC PARTS REQUIRED


Part shown at 4% of actual size

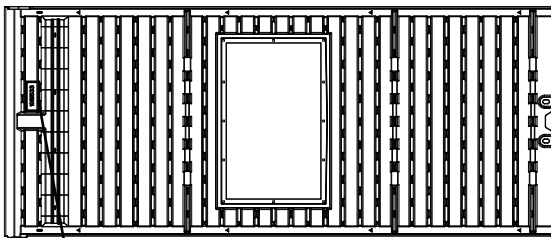

1015533


**AHB** (x2)  
Roof Panel for Domed Skylight

Part shown at 8% of actual size



**AGB** (x2)  
Domed Skylight


### TOOLS REQUIRED



Phillips Screwdriver



3/8" Wrench




Safety Glasses






## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



AHI (x2)  
(Not to scale)

SEC 9


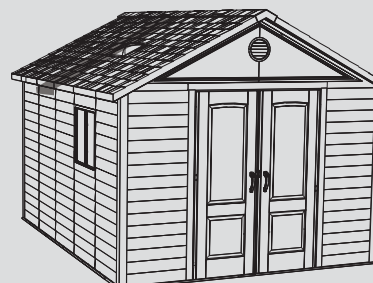


### SEC

#### 9.1

### DOMED SKYLIGHT ASSEMBLY

Use a plain screwdriver to gently remove any excess plastic from the twelve holes in the **Roof Panel for Domed Skylight (AHB)**. It's important that the hole stay square; try not to round the corners of the edges of the holes. Stick the end of the **Butyl Tape (AHI)** over the groove and top, left hole of the Roof Panel for Domed Skylight as indicated below. Move to the right and over the groove covering all the holes along the top of the opening. Once the top, right corner and hole are covered, cut the Butyl Tape. Run your finger along the paper backing pressing down slightly to remove any gaps or bubbles between the Butyl Tape and the groove. Remove the paper backing from the piece of Butyl Tape you just applied. Overlap the end of the roll of Butyl Tape with the end you just cut and apply the Butyl Tape over the holes along the groove on the right of the opening. Continue applying the Butyl Tape in this fashion until all holes have been covered and the ends overlap.

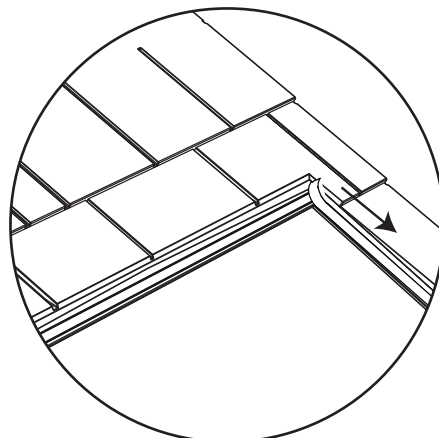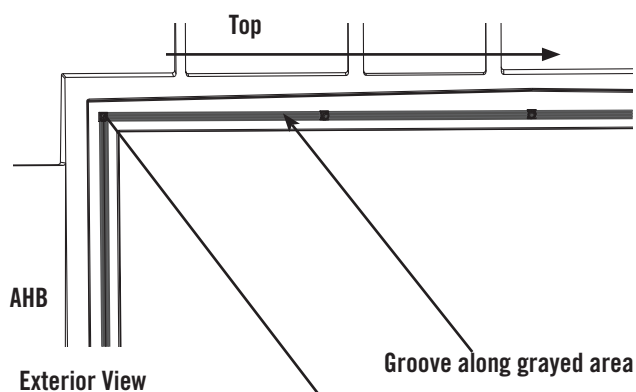

**Note:** Use a screwdriver to remove any excess plastic from all holes in Panel.




**Note:** Butyl Tape must cover all twelve holes.


### SEC

#### 9.2

Remove the protective plastic film from **both** sides of the **Domed Skylight (AGB)**. Carefully align the holes in the Domed Skylight with those in the Butyl Tape. Set the Domed Skylight over the opening in the Roof Panel for Domed Skylight. Press down and verify there are no gaps or bubbles between the Butyl Tape and the Domed Skylight.



AGB (x2)

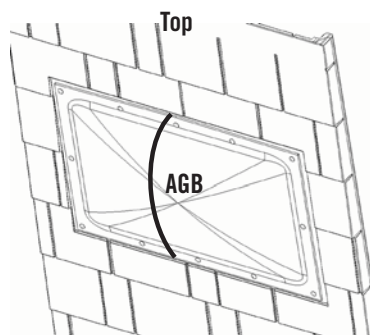


Exterior View



## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




3/8"



ACR (x24)




ADK (x24)



AEE (x24)



SEC 9

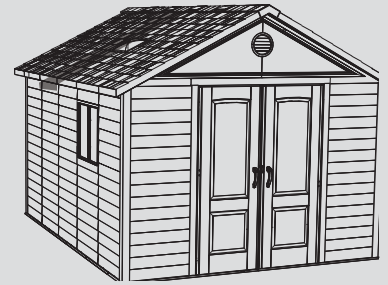

SEC

9.3

Insert one (1) **#10 x 5/8" Carriage Bolt (ACR)** through each hole in the Domed Skylight. Press the Bolt through the Butyl Tape and through the Roof Panel for Domed Skylight.

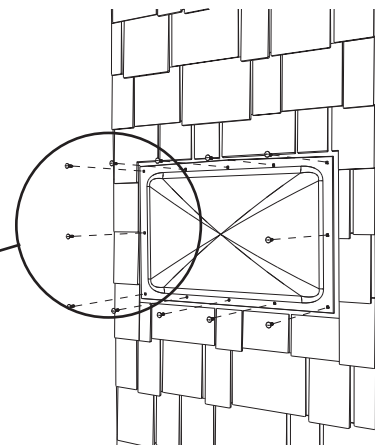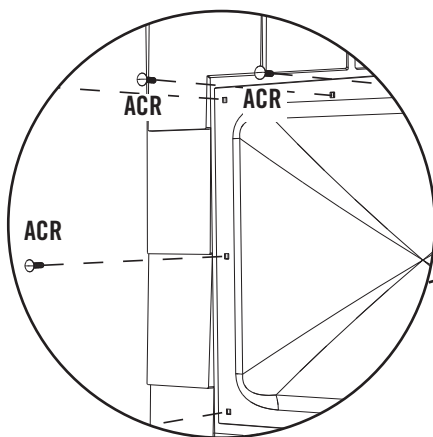


Exterior View


SEC

9.4

Secure the Domed Skylight to the Roof Panel with one (1) **#10 Flat Washer (AEE)** and one (1) **#10 Cap Nut (ADK)** for each Carriage Bolt. Set Skylight/Panel Assembly aside.

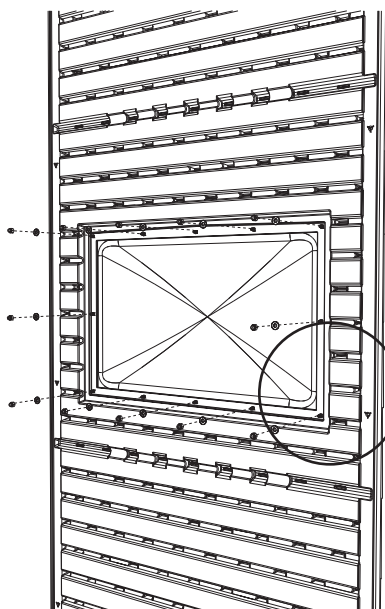

Interior View

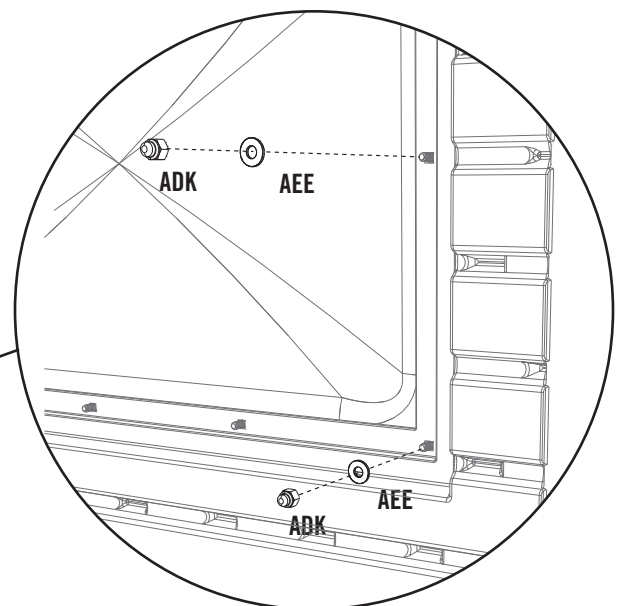


### WARNING

Do not overtighten the Cap Nut. If the end of the Bolt breaks through the plastic cap, call our Customer Service Department. Exposed threads on the end of the Bolt may cause serious injuries.


# SEC 10 DOOR & ENTRY GABLE INSTALLATION

## HARDWARE REQUIRED

Hardware shown at actual size (\*Unless noted otherwise)




**ADZ (x24)**  
1/4" x 5/8" Pan-Head Screw




**ACH (x4)**  
1/4" x 1 1/2" Carriage Bolt



**\*AHL (x1)**  
Dead Bolt Strike Plate




**\*AHN (x2)**  
Floor Bracket




**ADX (x2)**  
#10 x 1/2" Pan-Head Screw



**ADJ (x8)**  
1/4" Cap Nut



**ACA (x4)**  
1/4" x 1/2" Carriage Bolt





**AEB (x4)**  
1/4" Flat Washer

## METAL PARTS REQUIRED



Parts shown at 8% of actual size



**AFI (x1)** Left Hinge Assembly




**AFK (x1)** Right Hinge Assembly



**AFD (x1)**  
Door Header


## PLASTIC PARTS REQUIRED

Parts shown at 4% of actual size

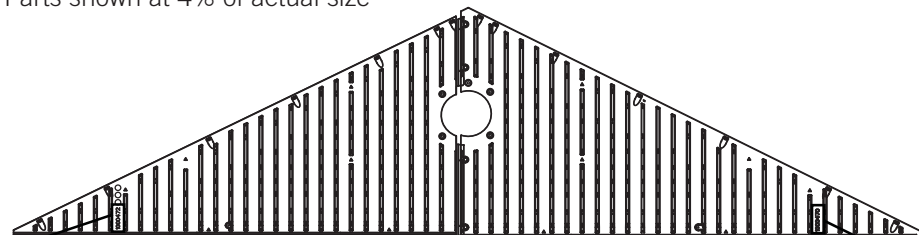


**1000472**  
Front Gable Assembly

Rear View **1000470**

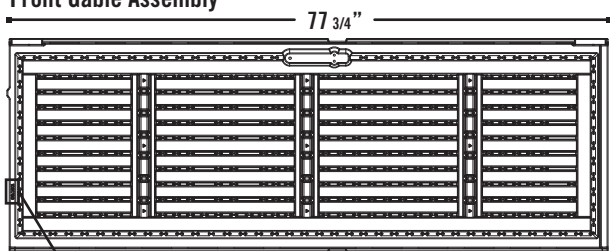

**1001790**  
Left Door Assembly


Rear View

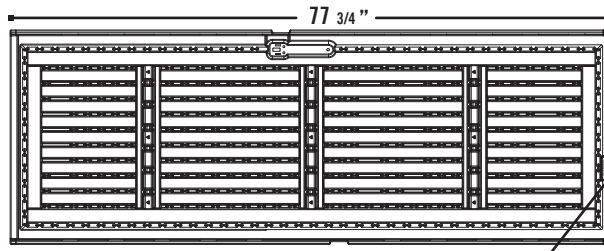

Right Door Assembly

**1001787**  
Rear View

## TOOLS REQUIRED



Phillips Screwdriver




Pliers




Safety Glasses



## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



SEC 10

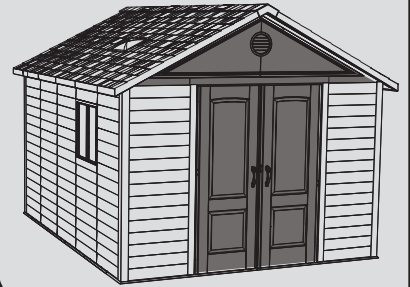


### 2 ADULTS REQUIRED FOR THESE STEPS

SEC

10.1

#### FRONT GABLE INSTALLATION



Set the Front Gable Assembly in front of the two short Wall Support Channels and on the two front Wall Panels as shown.

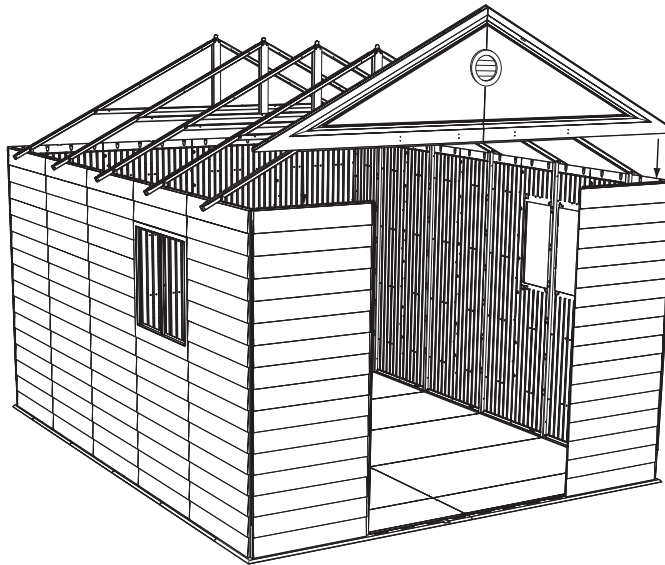

SEC

10.2


Align the holes in the sides of the Front Gable Assembly with those in the tops of the front Wall Panels and secure with eight (8)  $\frac{1}{4}$ " x  $\frac{5}{8}$ " Pan Head Screws (ADZ) at the locations indicated. Also, secure the Entry Gable Assembly to the Wall Support Channel Extensions using two (2)  $\frac{1}{4}$ " x  $\frac{5}{8}$ " Pan Head Screws (ADZ).

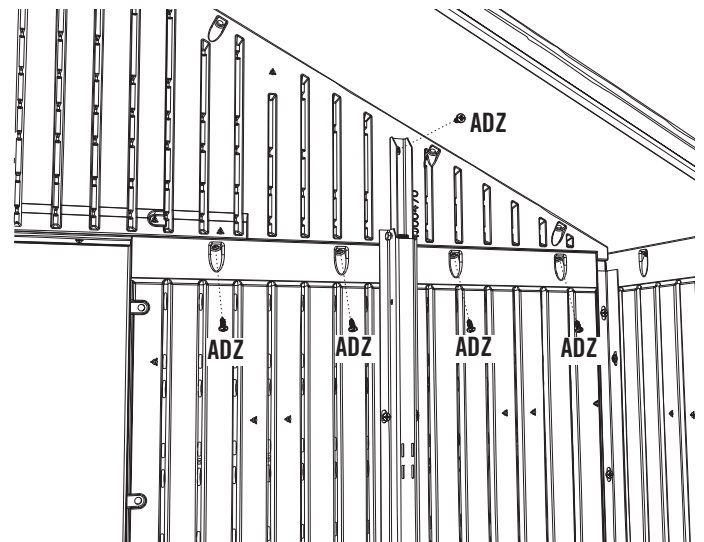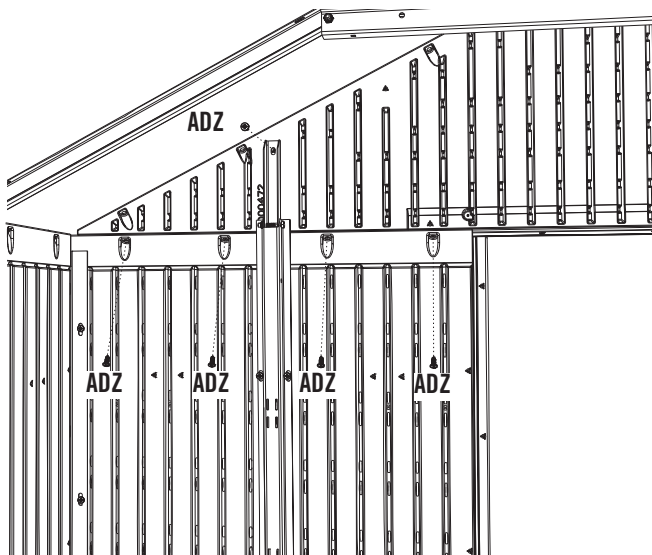




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 10




AHN (x2)  
(Not to scale)



ACA (x4)




ADJ (x4)

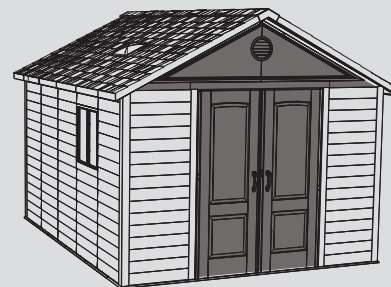


### SEC 10.3

#### DOOR FRAME ASSEMBLY & INSTALLATION

Insert a 1/4" x 1/2" Carriage Bolt (ACA) through the top hole of the **Right Door Hinge (AFK)** as shown, and secure with a 1/4" Cap Nut (ADJ). Only hand tighten the Cap Nut for now. Repeat this step for the **Left Door Hinge (AFI)**.

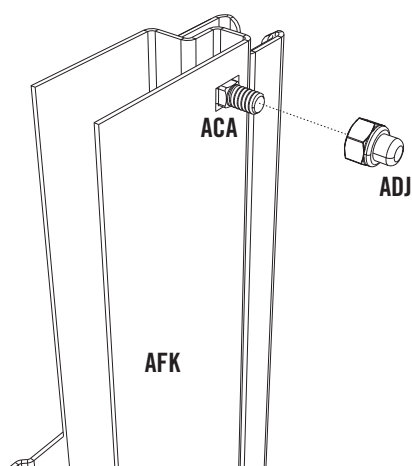


Right Door Hinge

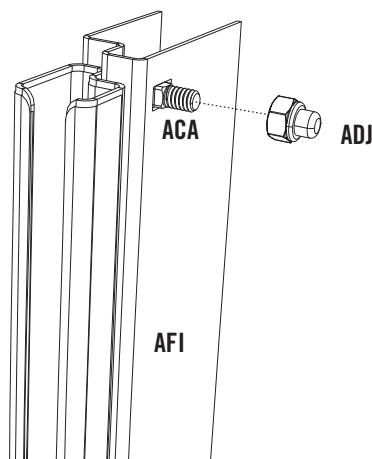


Left Door Hinge

### SEC 10.4

Attach a **Floor Bracket (AHN)** to the bottom of the **Right Door Hinge** using a 1/4" x 1/2" Carriage Bolt (ACA) and a 1/4" Cap Nut (ADJ). Only hand tighten the Cap Nut for now. Repeat this step for the **Left Door Hinge (AFI)**.

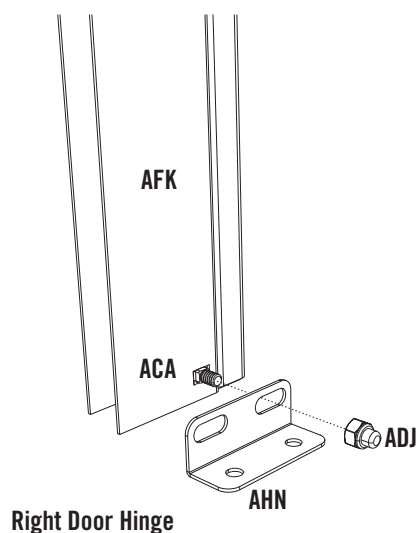



Right Door Hinge

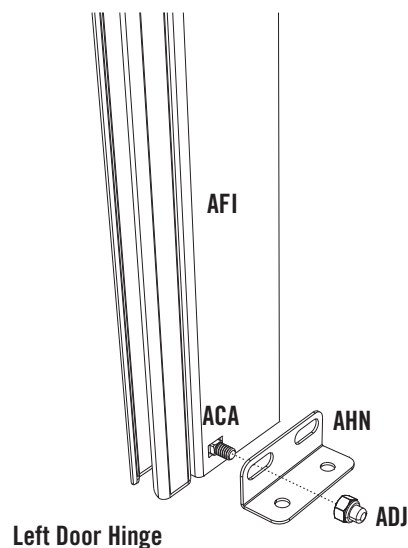

Left Door Hinge




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x5)

SEC 10


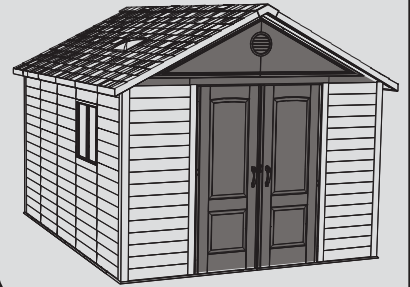


SEC

10.5

### DOOR FRAME INSTALLATION



Slide the Right Door Hinge Assembly over the right, front Wall Panel and secure the Hinge Assembly to the Wall Panel using five (5) 1/4" x 5/8" Pan-Head Screws (ADZ).

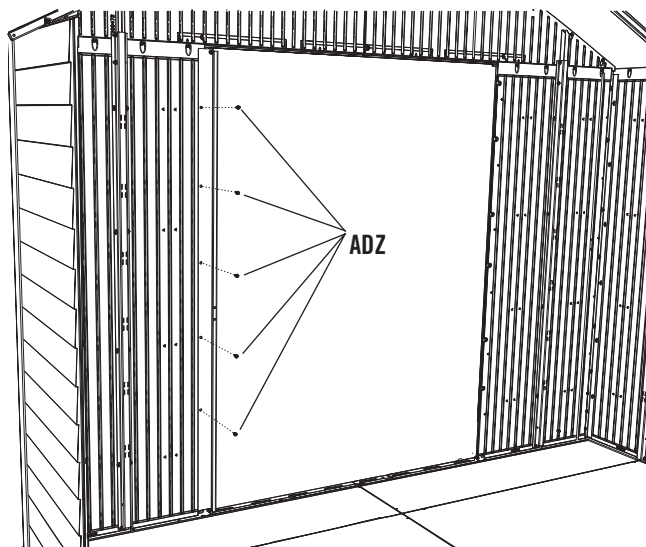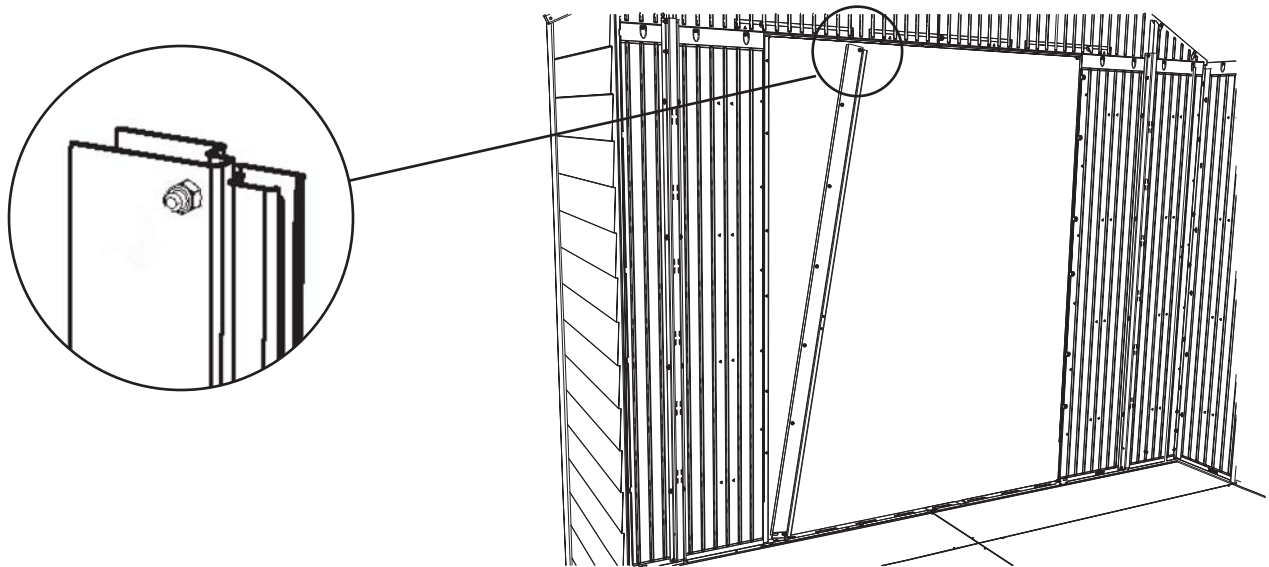






## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x5)




SEC. 10

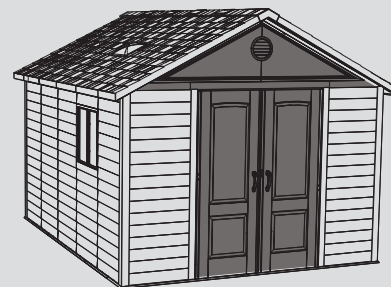

SEC



10.6

Slide the Left Door Hinge Assembly over the left, front Wall Panel and secure the Hinge Assembly to the Wall Panel using five (5) 1/4" x 5/8" Pan-Head Screws (ADZ).

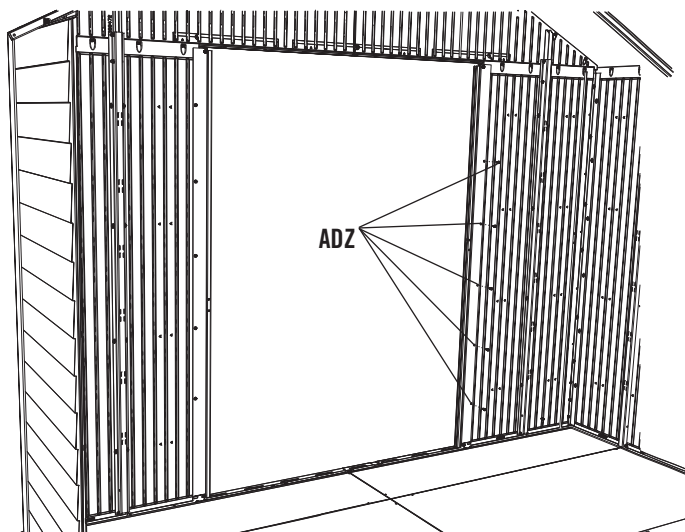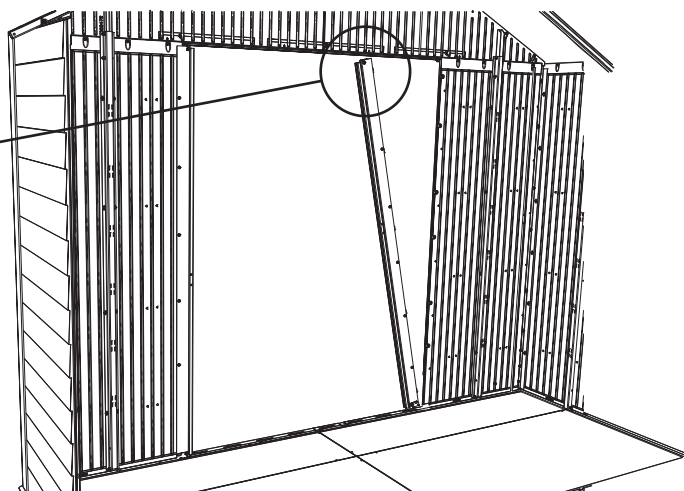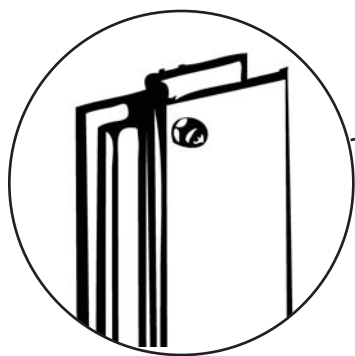




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE






SEC 10

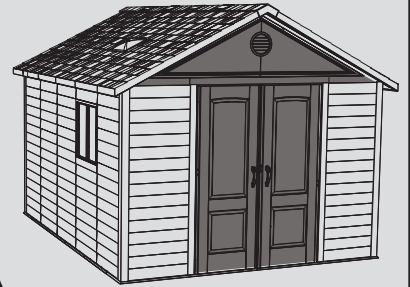

SEC

10.7


Carefully remove the 1/4" Cap Nut from the top of the Left Door Hinge Assembly. Place the **Door Header (AFD)** at the top of the Door Hinge Assembly so 1/4" x 1/2" Carriage Bolt goes through the elongated hole on the Door Header as shown. Carefully replace the 1/4" Cap Nut. **Repeat this step for the Right Door Hinge Assembly.** Finally, secure the Door Header to the Front Gable using four (4) 1/4" x 5/8" Pan-Head Screws (**ADZ**) at the locations shown.

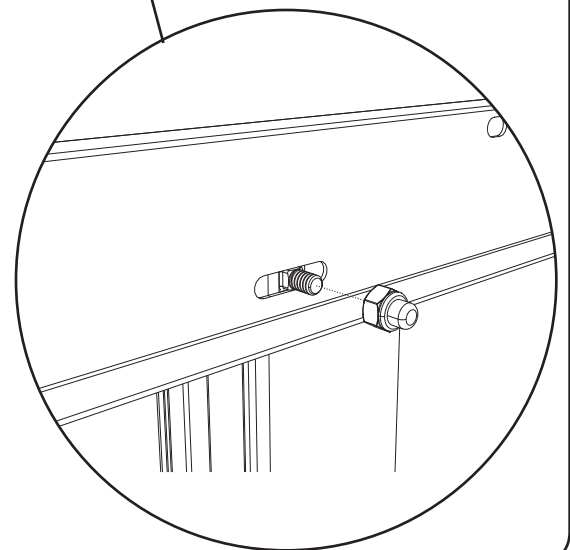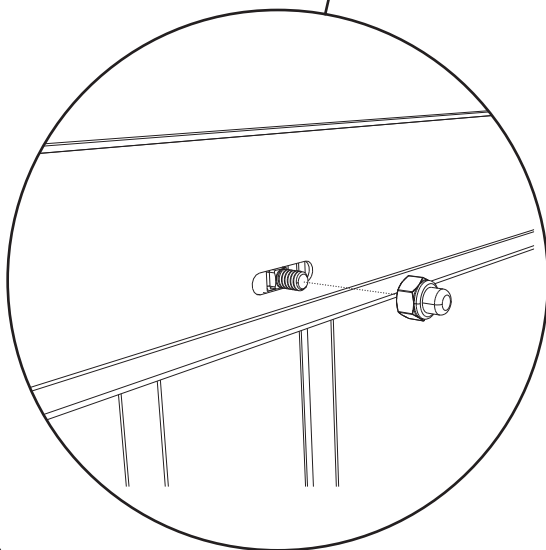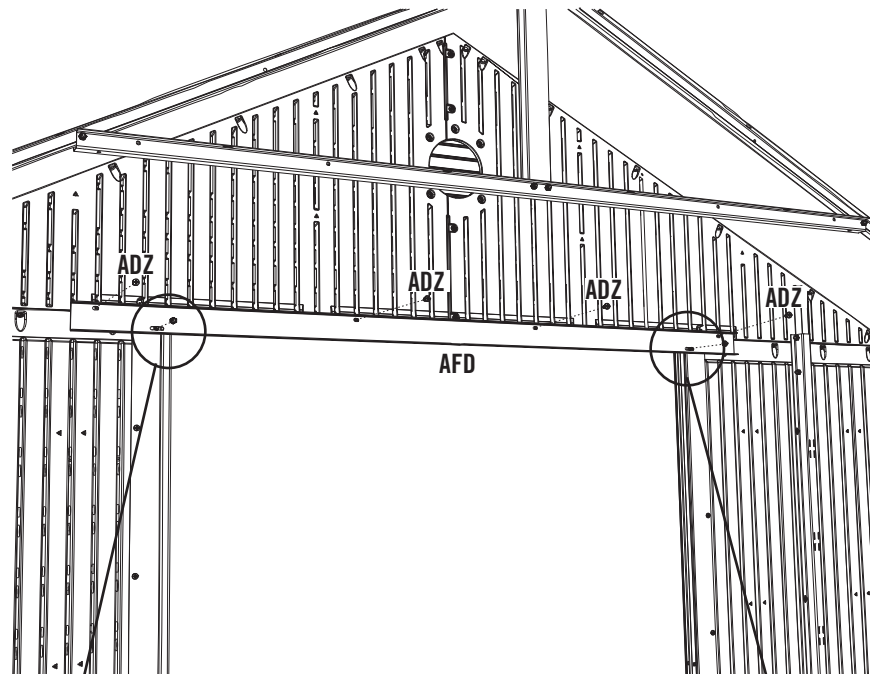






## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



NO HARDWARE REQUIRED FOR THIS PAGE

SEC. 10

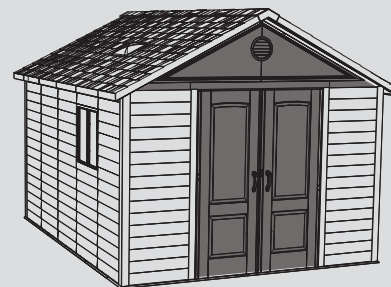


SEC

10.8



### DOOR INSTALLATION

Slide the edge of the Left Door Assembly down into the end of the Left Hinge Assembly as shown.

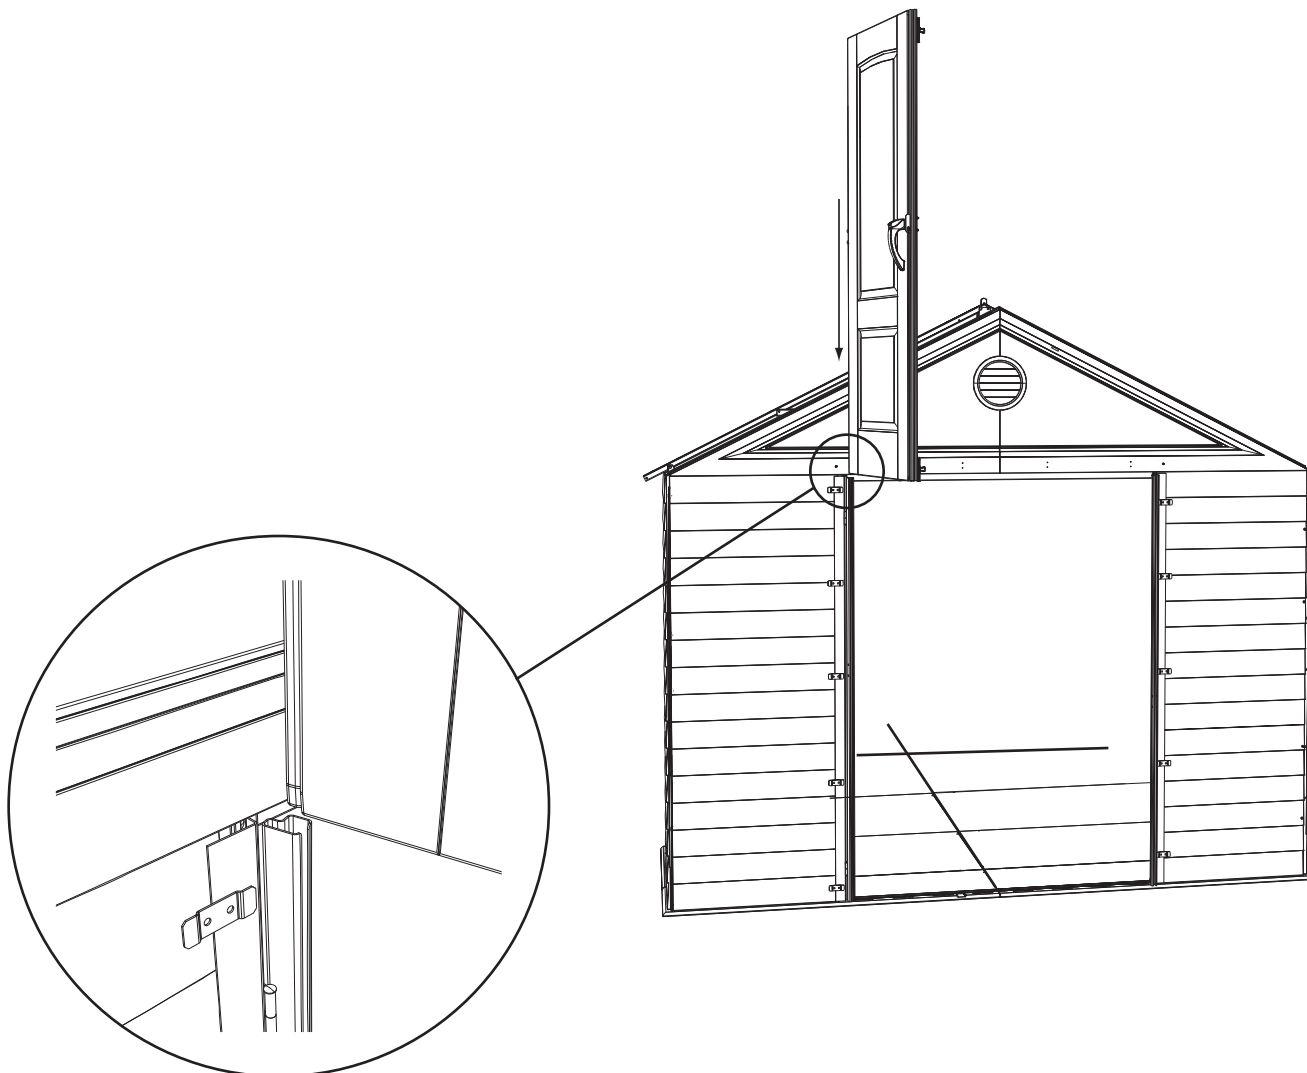




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



AEB (x4)




ADJ (x4)



ACH (x4)



SEC 10

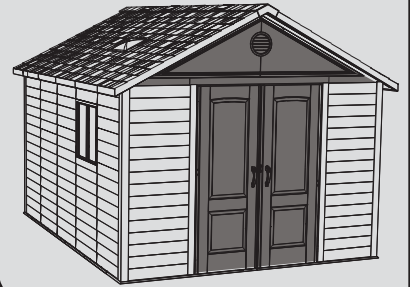

SEC

10.9



Align the notch in the Left Door Assembly with the two holes in the end of the Left Hinge Assembly, and insert two (2) 1/4" x 1 1/2" **Carriage Bolts (ACH)**. Secure the Door to the Hinge using two (2) 1/4" **Flat Washers (AEB)** and two (2) 1/4" **Cap Nuts (ADJ)**. Repeat these steps for the Right Door Assembly.

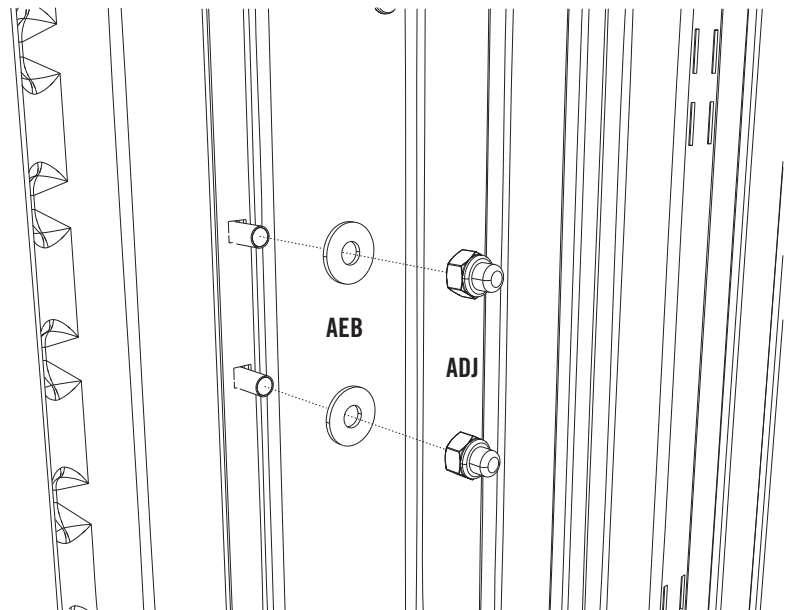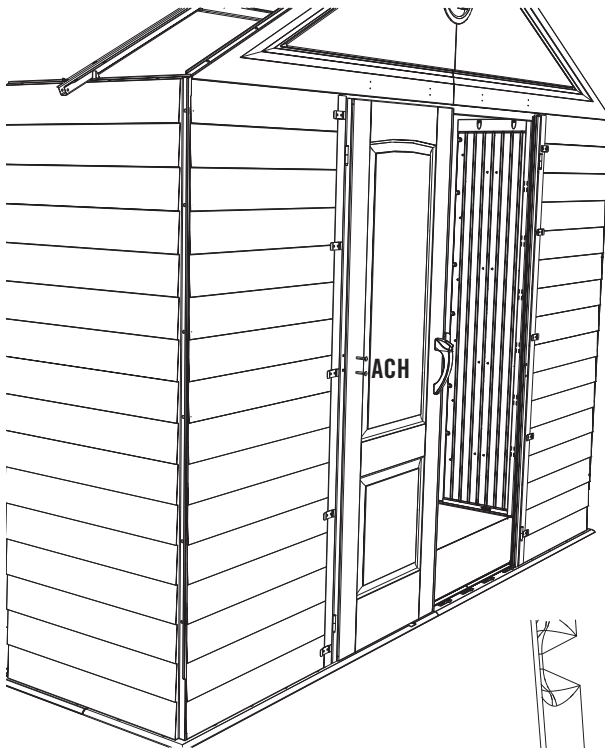


Back of Door



## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




**AHL** (x1)  
(Not to scale)



**ADX** (x2)


SEC 10

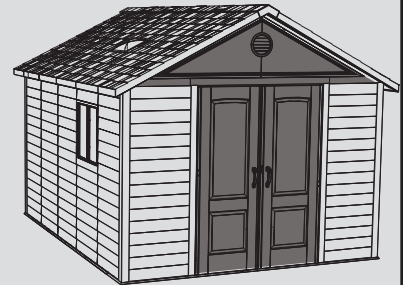

SEC

10.10


Secure the **Deadbolt Strike Plate (AHL)** to the Floor using two (2) **#10 x 1/2" Pan-Head Screws (ADX)**.

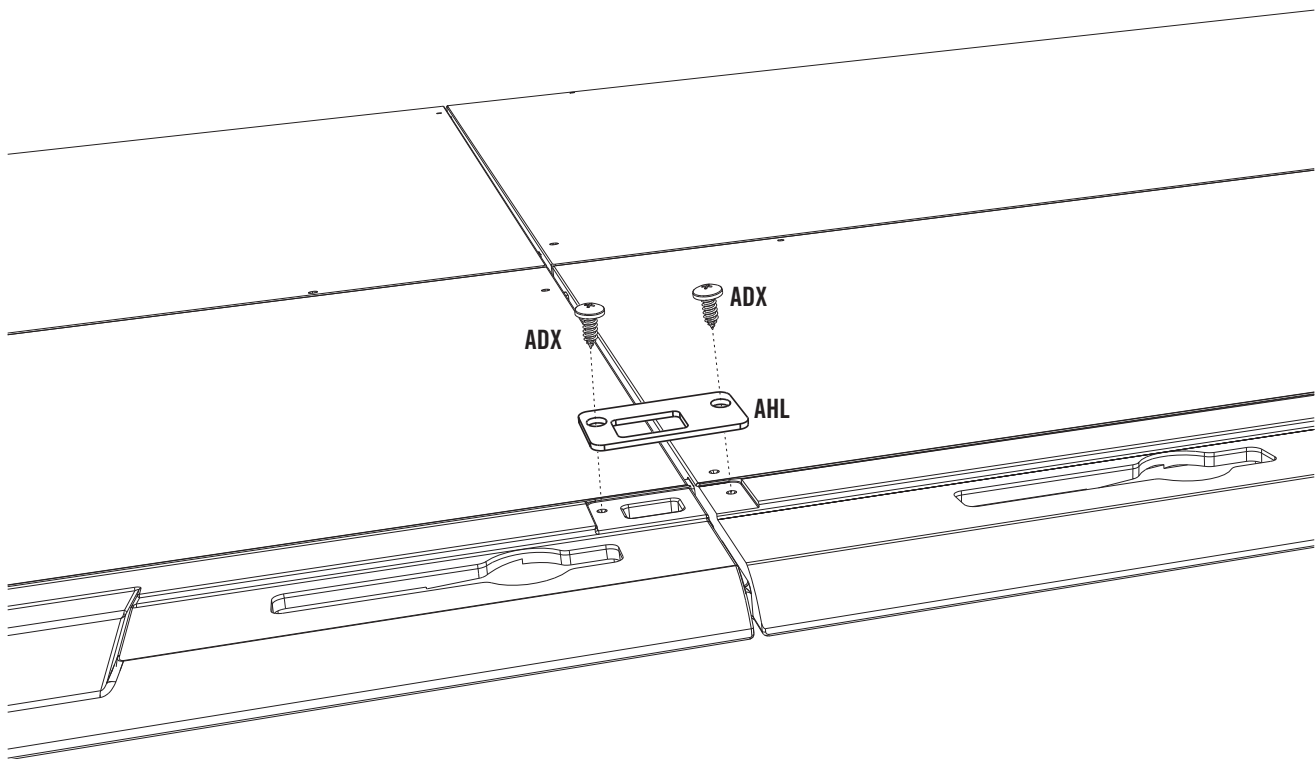

## SEC 11 TRIM INSTALLATION

### HARDWARE REQUIRED


Hardware shown at actual size (\*Unless indicated otherwise)




**ADX** (56)  
#10 x 1/2" Pan-Head Screw




**ACK** (4)  
#8 x 1" Pan-Head Screw



**\*AHR** (x2)  
Door Trim Clip



**\*AHQ** (x4)  
Door Trim Bracket




**\*AGA** (x24)  
Corner Trim Bracket

### METAL PARTS REQUIRED


NO METAL PARTS REQUIRED FOR THIS SECTION

### PLASTIC PARTS REQUIRED


Parts shown at 4% of actual size



**AGC** (x1) Top Door Trim



**AGD** (x2) Side Door Trim




**AQX** (x4) Corner Trim

### TOOLS REQUIRED



Phillips Screwdriver



Safety Glasses




7/16" Wrench (x2)



Pliers




## TOOLS AND PARTS REQUIRED FOR THIS PAGE



AHQ (x4)  
(Not to scale)

SEC 11

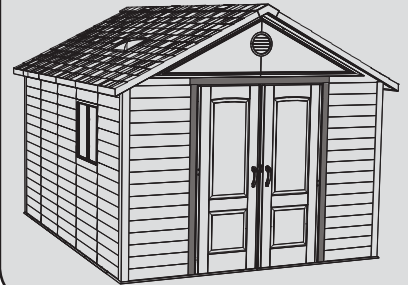


SEC

11.1

### DOOR TRIM INSTALLATION


Slide **Side Door Trim (AGD)** into place onto Door Hinge Brackets.

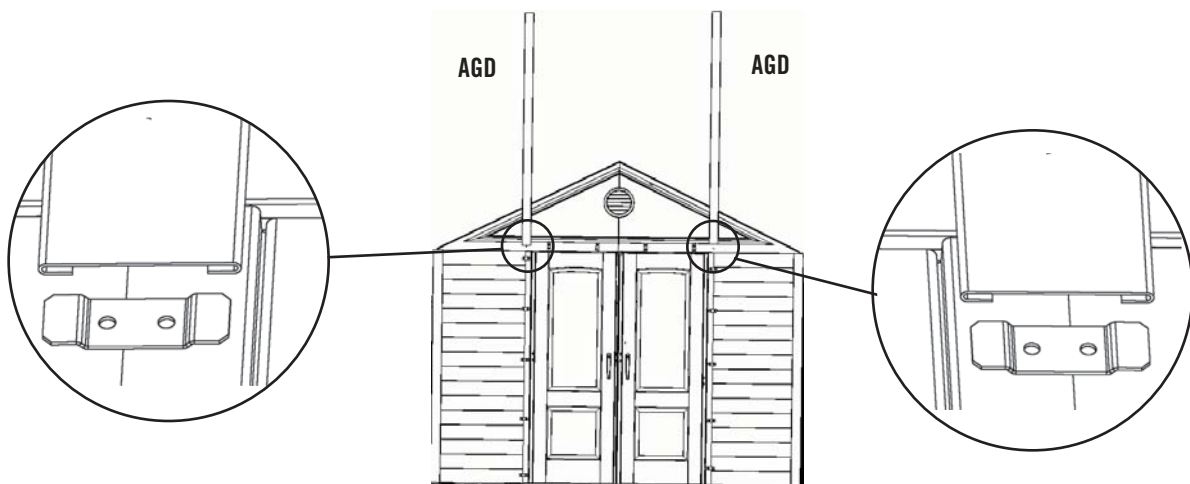

SEC

11.2



Attach four (4) **Door Trim Brackets (AHQ)** above the Door frame at the locations shown.

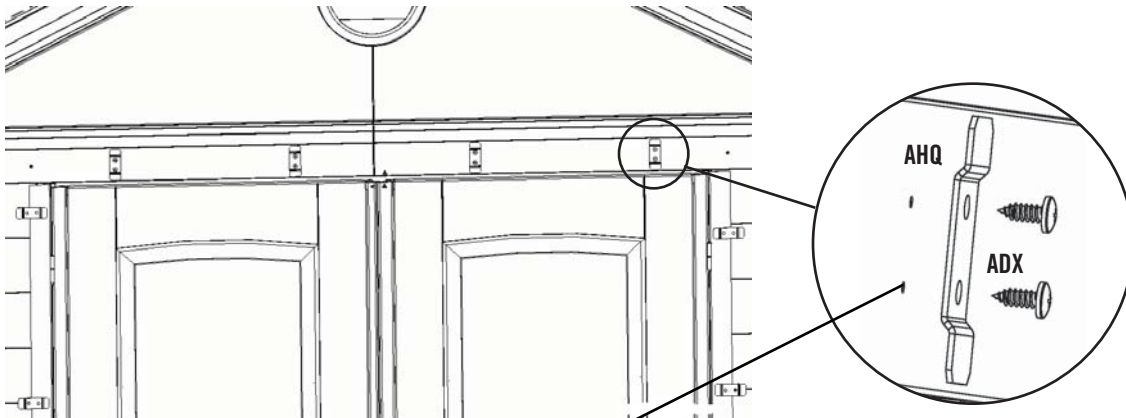

*Note: Look for screw hole locator marks above the Door frame.*




## TOOLS AND PARTS REQUIRED FOR THIS PAGE



AHR (x2)  
(Not to scale)

SEC 11

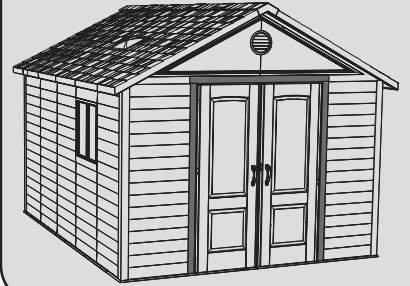

SEC

11.3

Slide **Door Trim Clips (AHR)** into the top of the Side Door Trim (Fig. 1), on each side of the Door. Slide the **Top Door Trim (AGC)** into place, and secure with the Door Trim Clips (Fig. 2).

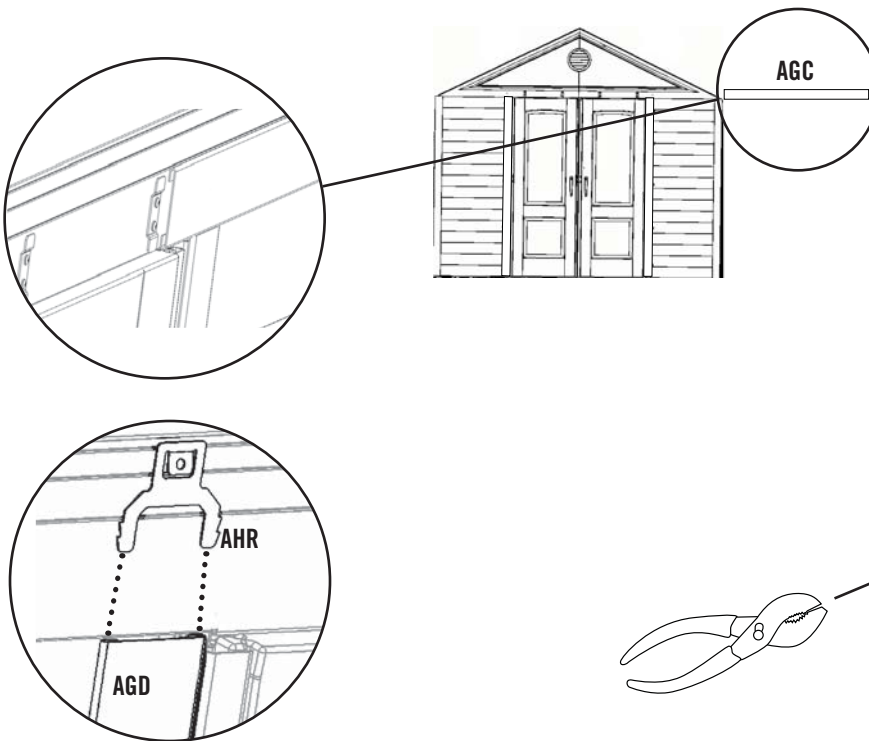


Fig. 1

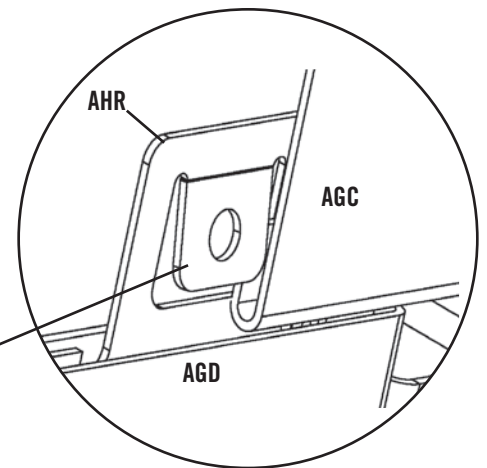




Fig. 2



*Note: You may need to slightly bend the tab outward with pliers.*




## TOOLS AND PARTS REQUIRED FOR THIS PAGE



ADX (x48)




ACK (x4)



AGA (x24)  
(Not to scale)

SEC 11

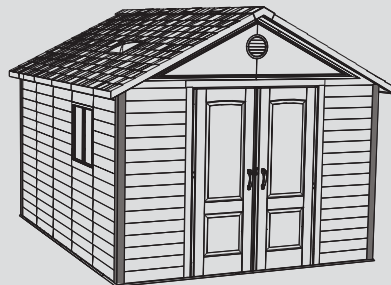


SEC

11.4

### CORNER TRIM INSTALLATION

Snap six (6) **Black Trim Brackets (AGA)** to a corner of the Shed. Fasten each Bracket with two (2) **#10 x 1/2" Screws (ADX)**. There are no pilot holes in the Shed Wall; the Screws are inserted directly into the plastic.

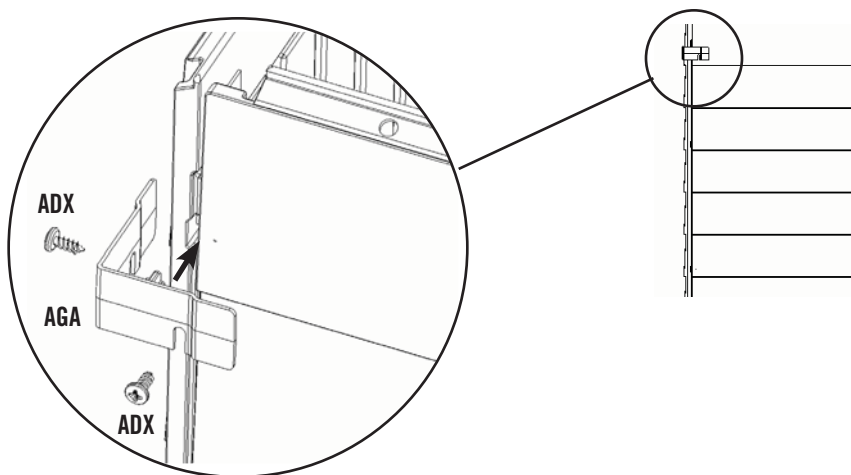

**!** Note: The tab on the Trim Brackets fit into the six screw indentations along each corner of the Shed.




### WARNING

Use extreme caution when standing on ladders to perform assembly steps. Follow all warnings and cautions on the ladder. Failure to follow all of these instructions and warnings could lead to serious personal injury or property damage.

SEC

11.5

Slide **Corner Trim Piece (AQX)** onto the Brackets. Align the Trim Piece with the top of the Wall Panel and fasten with one (1) **#8 x 1" Pan-Head Screw (ACK)**. Insert the Screw on the side of the Shed so that it will be hidden by the Roof overhang.

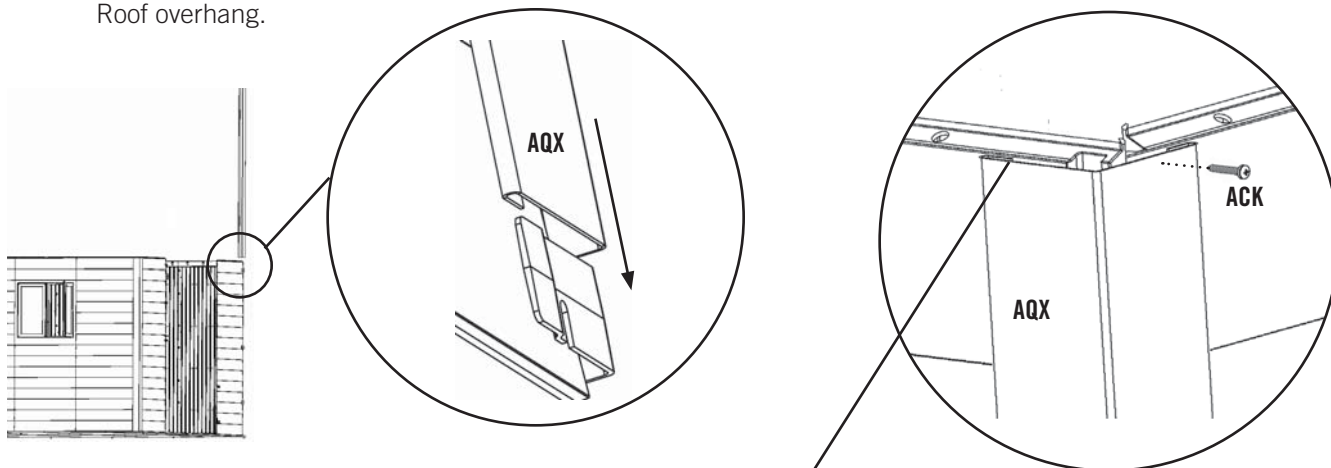


**!** Note: Ensure the Corner Trim Piece is even with the front edge of the Wall Panel before securing with Screw.


## SEC 12 ROOF & REAR GABLE INSTALLATION

### HARDWARE REQUIRED

Hardware shown at actual size (\*Unless otherwise noted)




**ADZ** (x220)  
1/4" x 5/8" Pan-Head Screw  
(Not all screws will be used)




**\*AJA** (x20)  
Foam Cube




**ADK** (x1)  
#10 Cap Nut



**AED** (x16) #10 x 1"  
Fender Washer



**ACJ** (x16)  
#10 x 5/8" Pan-Head Screw



**ADX** (x4)  
#10 x 1/2" Pan-Head Screw




**ACF** (x1)  
#10 x 5/16" Pan-Head Screw

### METAL PARTS REQUIRED

Parts shown at 8% of actual size



**AFL** (x24)  
Roof Support Strip




**AFF** (x2)  
Gable Truss Brace



*Note: The hole in the Roof Support Strip is for manufacturing purposes only.*


### PLASTIC PARTS REQUIRED

Parts shown at 4% of actual size

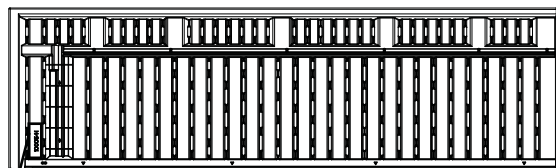


1000541

**AGU** (x2) Outer Roof Panel "A"

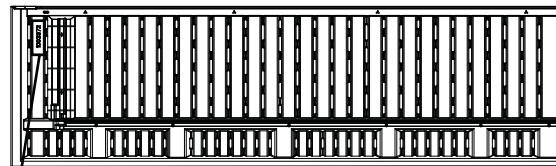


1003372

**AGV** (x2) Outer Roof Panel "B"

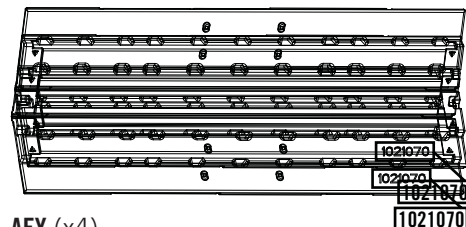


**AFY** (x4)  
Center Roof Cap

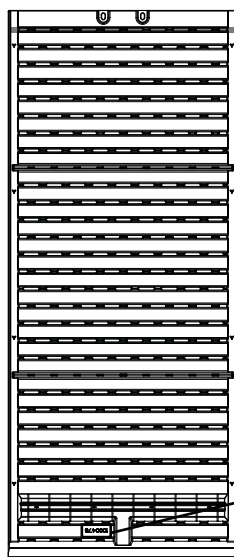


1000476

**AGQ** (x6)  
Inner Roof Panel

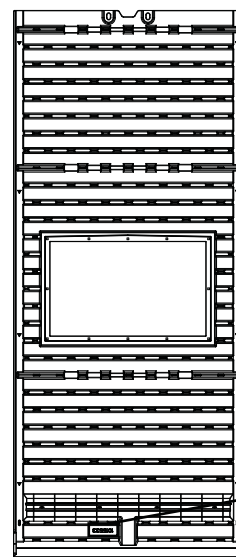


1015533

**AHB** (x2)  
Inner Roof Panel for Domed Skylight




**\*AHA** (x2)  
Roof Cap Cover



1000540

**AGE** (x2) End Roof Cap




### TOOLS REQUIRED




Phillips Screwdriver



7/16" Wrench



Flashlight





Safety Glasses






## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x24)



SEC 12

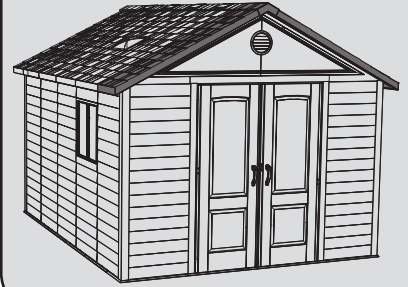

SEC

12.1



Install two **Outer Roof Panels "A" & "B" (AGU & AGV)** at the front of the shed as shown. The top of the Wall Panel fits into the groove near the bottom edge of the Panel. Align the holes in the Wall Panel, Entry Gable, and Truss Assembly with those in the Outer Roof Panel. Secure the Outer Roof Panels to the Entry Gable, Wall Panels, and Truss Assembly using twenty-four (24) **1/4" x 5/8" Pan-Head Screws (ADZ)**.

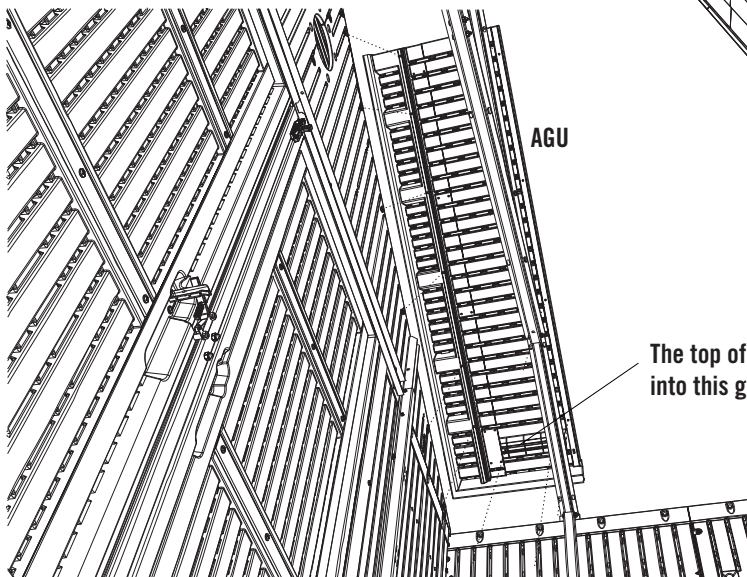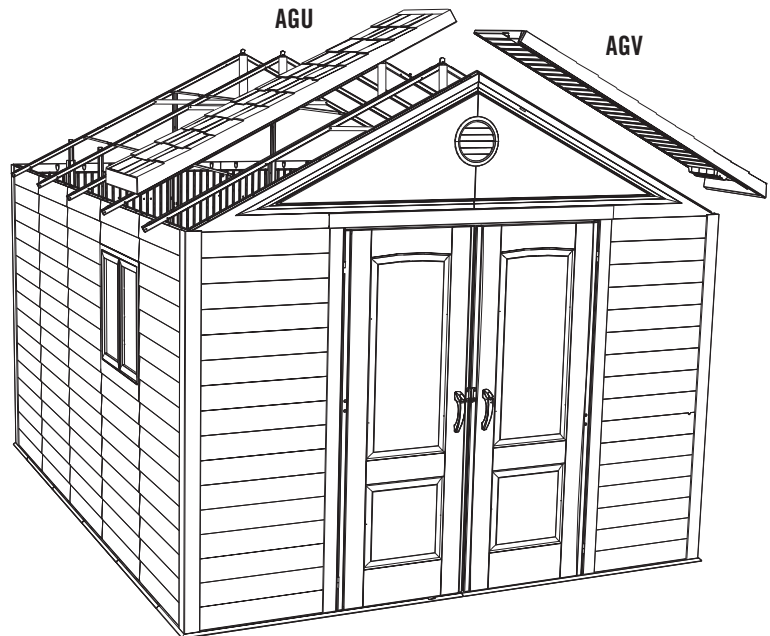

Interior Upward View



## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




ADZ (x24)



AFL (x6)



SEC 12

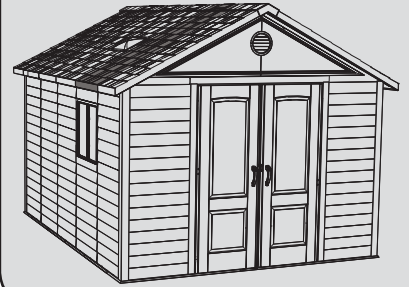

SEC

12.2

Install two **Roof Panels (AGQ or AHB)** next to the Outer Roof Panels as shown. **The Inner Roof Panel for Domed Skylight (AHB) may be inserted into any Inner Roof Panel position.** Insert three (3) **Roof Support Strips (AFL)** into the grooves of each Roof Panel (AGQ & AHB) to provide support for the Panels. Secure both Panels to the Truss Assemblies using twenty-four (24) **1/4" x 5/8" Pan-Head Screws (ADZ)**.

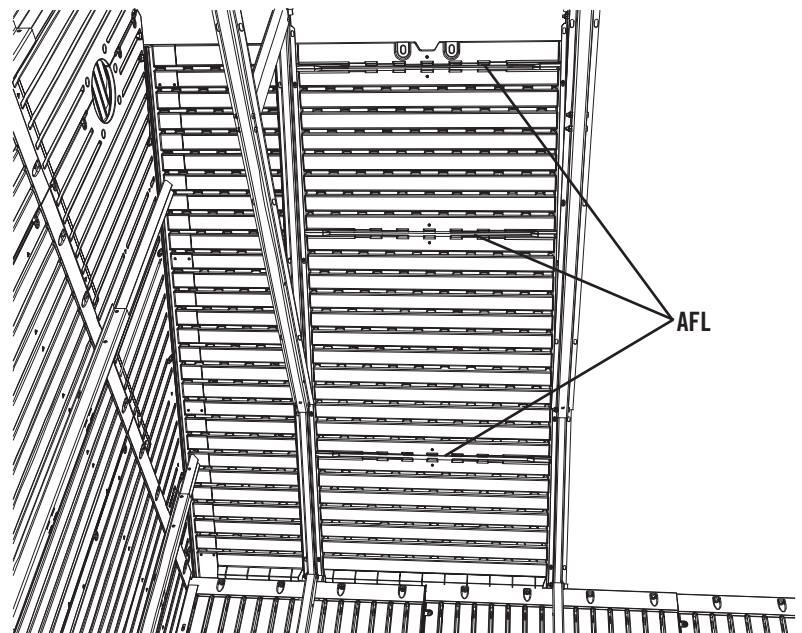
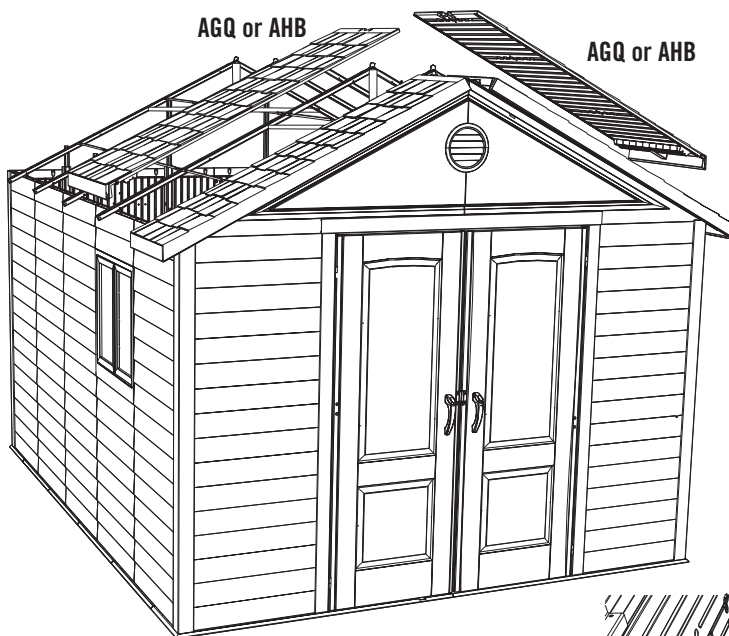


Interior Upward View



## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE


SEC 12



ADZ (x72)




AFL (x18)

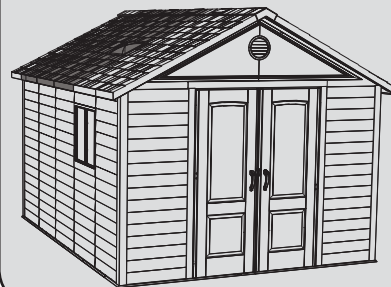

SEC



12.3

Continue installing the next six Roof Panels (**Inner Roof Panel for Domed Skylight** and **Inner Roof Panels**) and **Roof Support Strips** next to the previous two Roof Panels as shown. **The Inner Roof Panel for Domed Skylight may be inserted into any Inner Roof Panel position.** Secure the Panels to the Truss Assemblies using seventy-two (72) 1/4" x 5/8" Pan-Head Screws (ADZ).

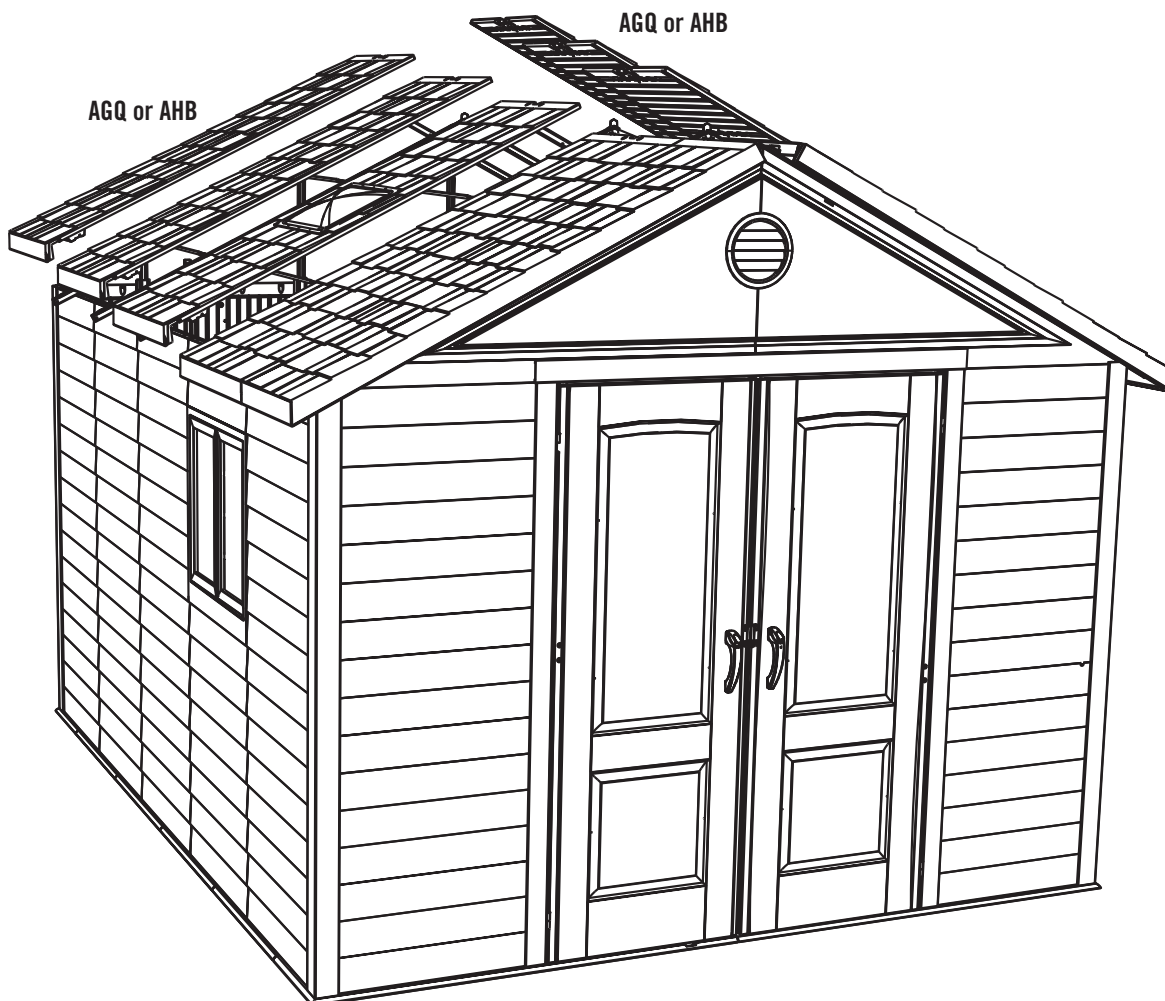




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x22)



SEC 12

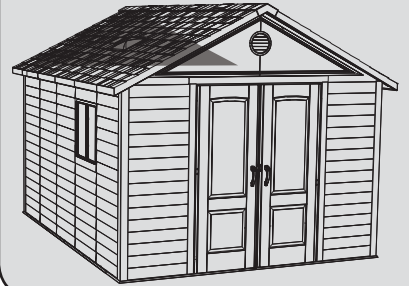

SEC

12.4



Install the Rear Gable Assembly to the tops of the rear Wall Panels using sixteen (16) 1/4" x 5/8" Pan-Head Screws (ADZ). Also, secure the Rear Gable Assembly to the Wall Support Channel Extensions using six (6) 1/4" x 5/8" Pan-Head Screws (ADZ).

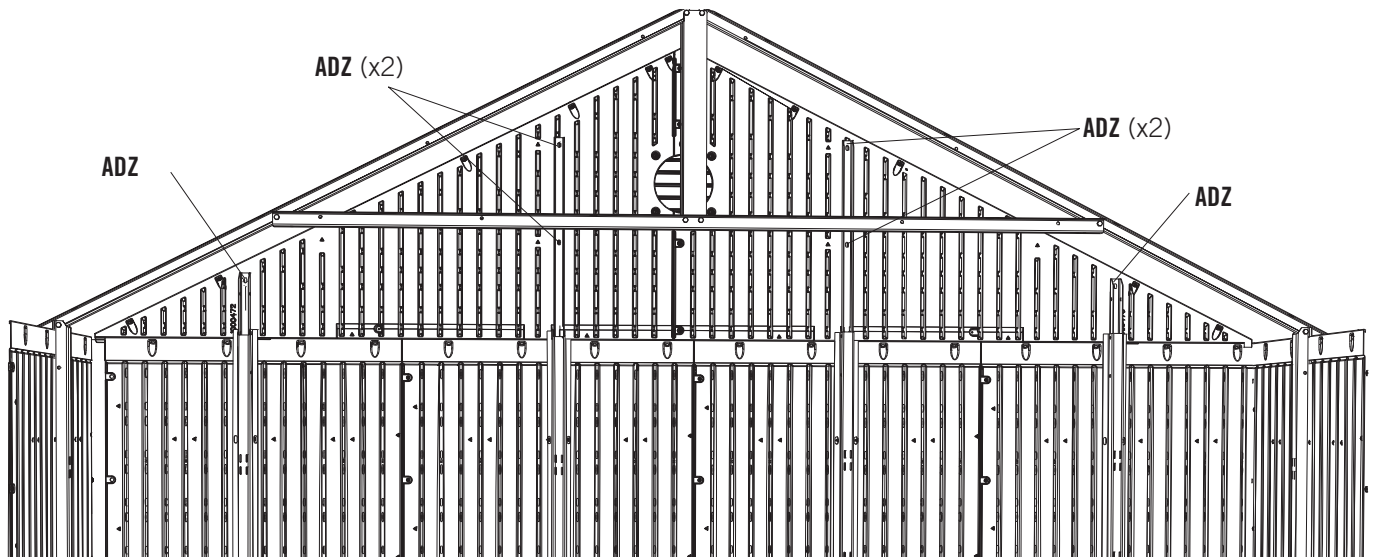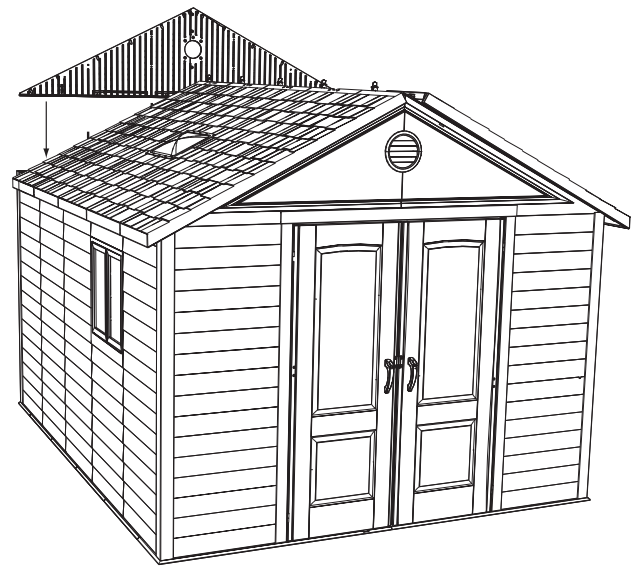






## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x24)


SEC 12

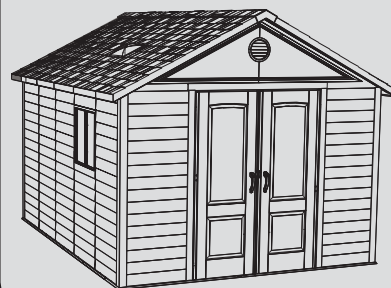

SEC



12.5

Install the last two **Outer Roof Panels "A" & "B" (AGU & AGV)** at the rear of the shed as shown. Secure the Outer Roof Panels to the Rear Gable and Truss Assembly using twenty-four (24) **1/4" x 5/8" Pan-Head Screws (ADZ)**.

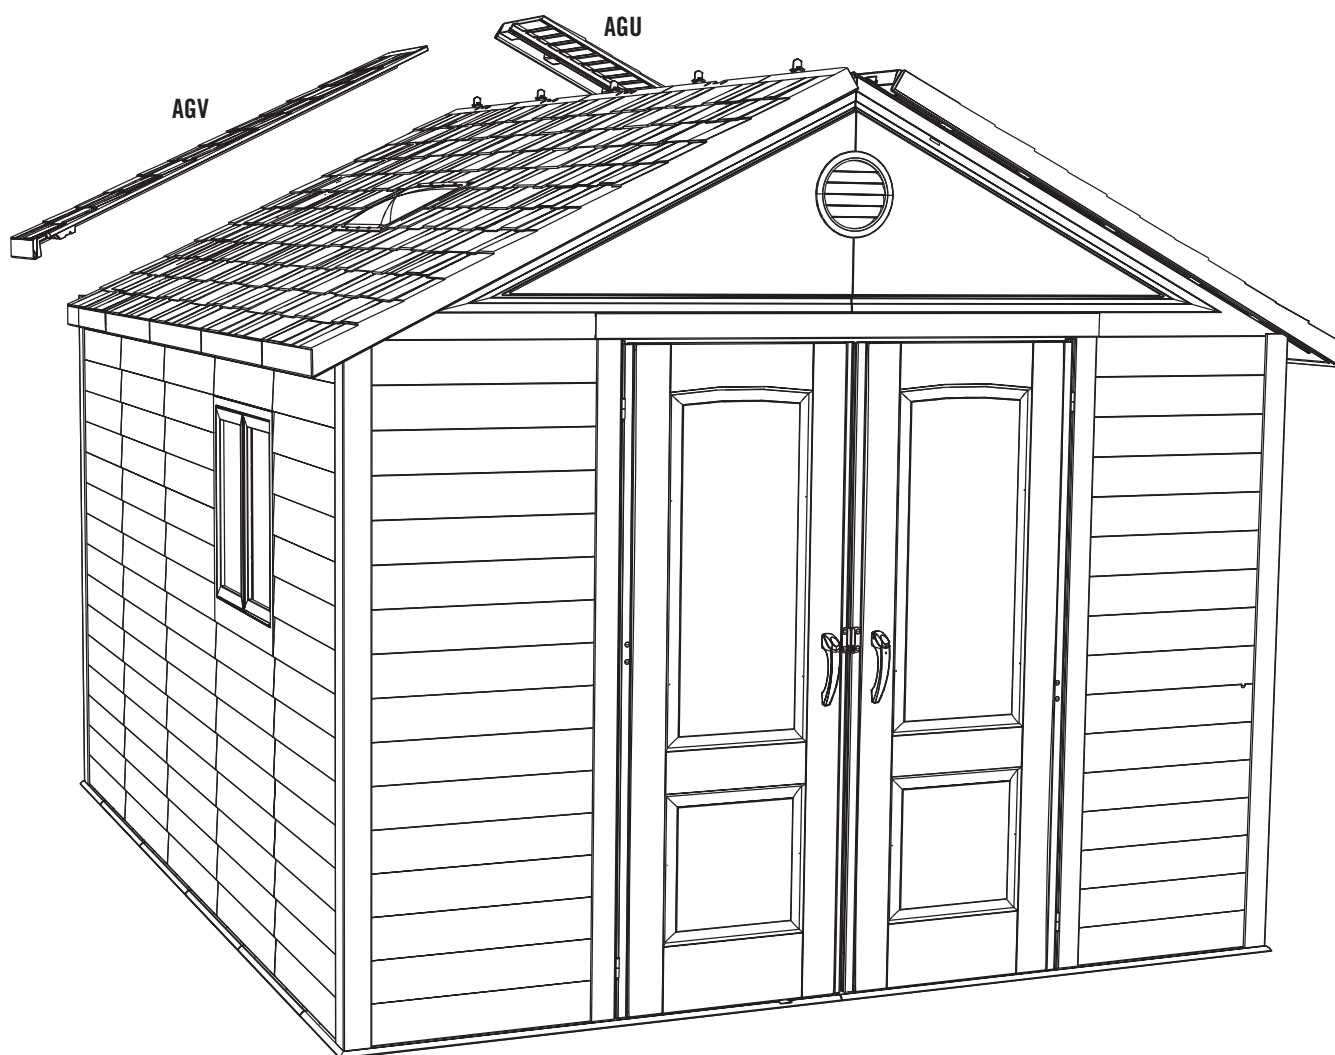




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x28)




ACJ (x16)



AED (x16)

SEC 12

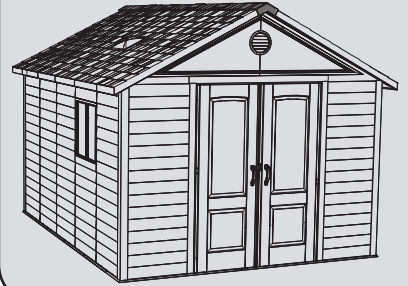



SEC

12.6


Starting at the front of the shed, install the two (2) **End Roof Caps (AGE)** and four (4) **Center Roof Caps (AFY)** to the Roof. Connect the Roof Caps to the Trusses and Gables using **1/4" x 5/8" Pan-Head Screws (ADZ)** and to the Roof Panels using **#10 x 5/8" Pan-Head Screws (ACJ)** and **#10 x 1" Fender Washers (AED)**.



Only use a hand screwdriver on this step

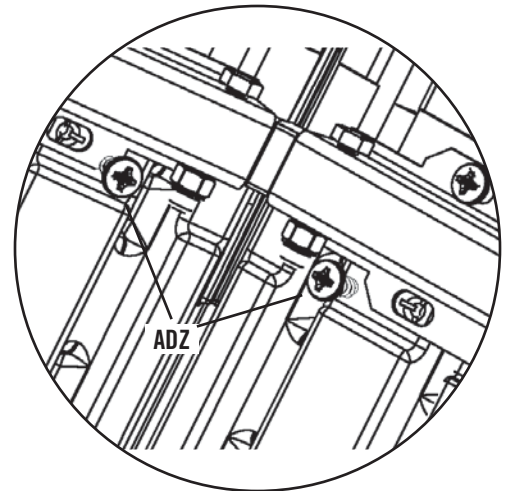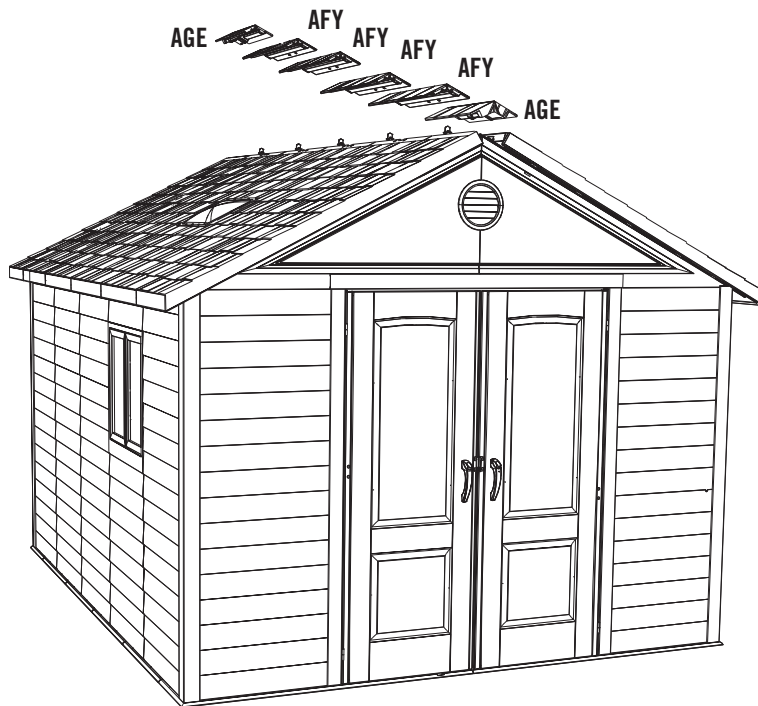



Attach Roof Caps to both sides of Trusses using 1/4" x 5/8" Pan-Head Screws (ADZ).

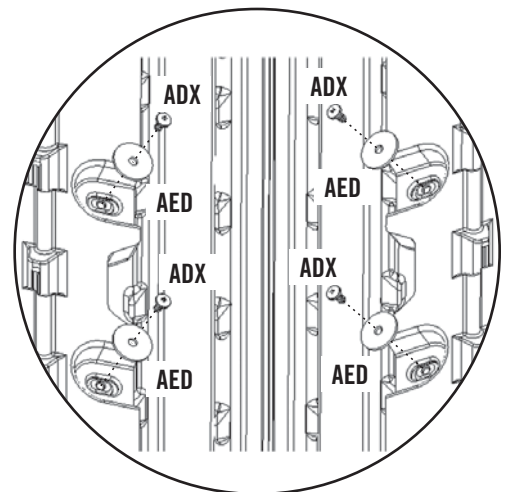

Attach Roof Caps Roof Panels using #10 x 5/8" Pan-Head Screws (ACJ) and #10 x 1" Fender Washers (AED).




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x4)



SEC 12

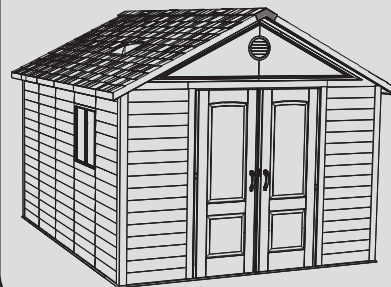

SEC


12.7

Connect a **Roof Cap Cover (AHA)** to the Front of the Shed as shown using the required hardware. Repeat this step for the rear of the shed.

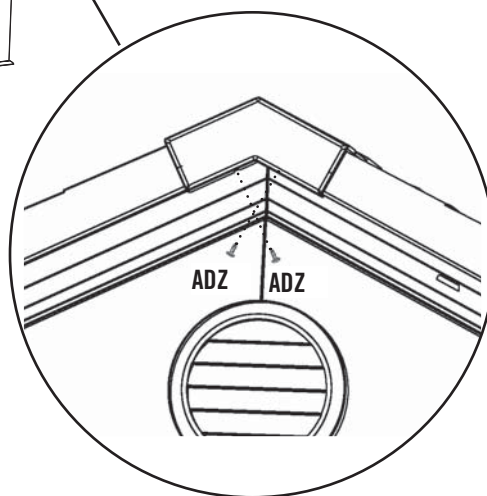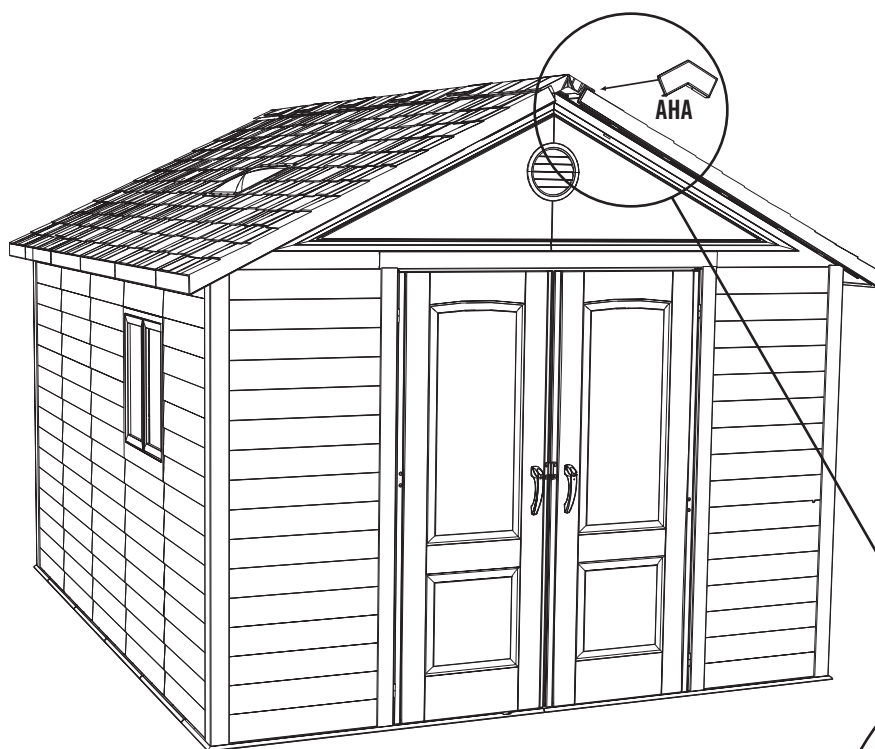




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



7/16"



ADX (x4)




ADK (x1)



ACF (x1)



SEC 12

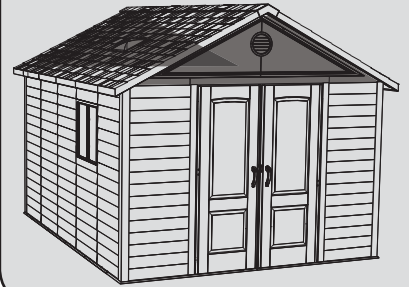


SEC

12.8

Connect a **Gable Truss Brace (AFF)** between the front Truss Assembly and Entry Gable and the rear Truss and Rear Gable Assemblies using two (2) **#10 x 1/2" Pan-Head Screws (ADX)** each. Secure the Gable Truss Brace into the Door Header Channel (on Entry Gable) using one (1) **#10 x 5/16" Pan-Head Screw (ACF)** and one (1) **#10 Cap Nut (ADK)**.

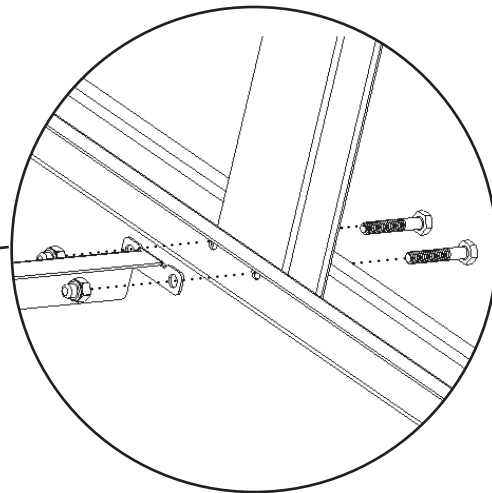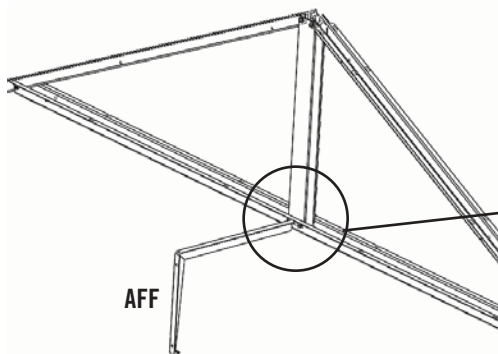

Remove the Hex Bolts and Cap Nuts from the Truss and use them to connect the Gable Truss Brace to the Truss.


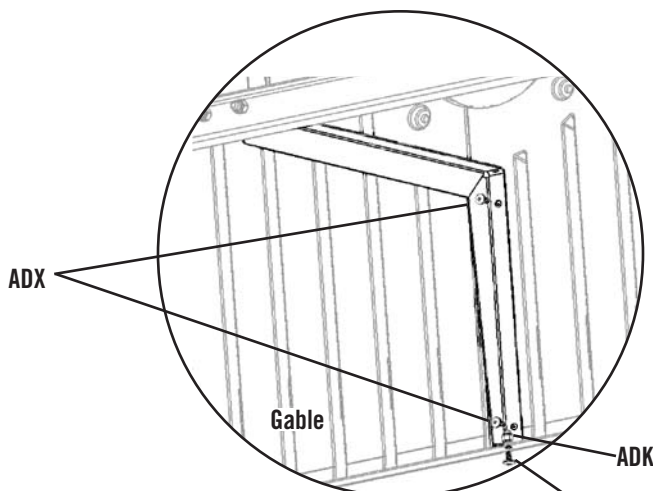


There are no pilot holes in the Gable to receive the Screws (ADX). Insert them directly into the plastic.






## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




ADZ (x20)



AJA (x20)  
(Not all are used)



SEC 12

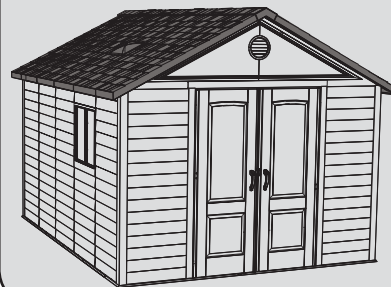

### SEC

#### 12.9



Along the outside of the shed, underneath the eaves, fasten the Truss Assemblies to the Roof Panels using two (2) 1/4" x 5/8" Pan-Head Screws (ADZ) per Truss Assembly.

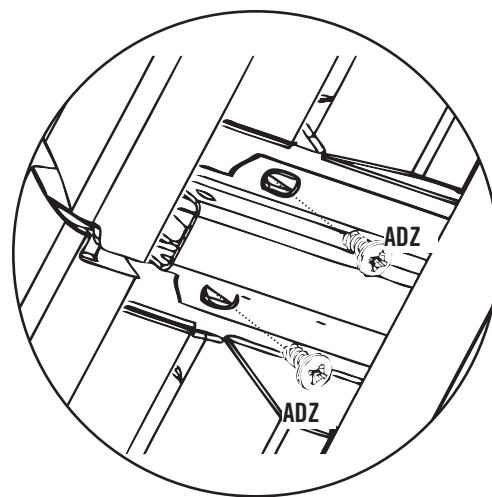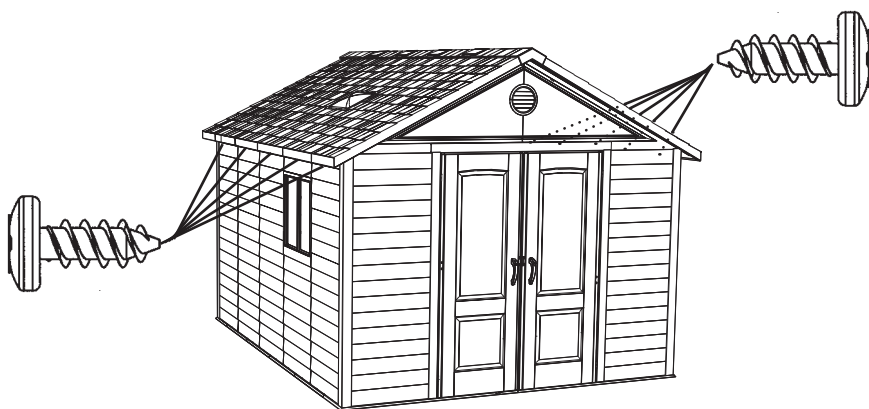

### SEC

#### 12.10


Insert two Foam Cubes (AJA) at each truss location.

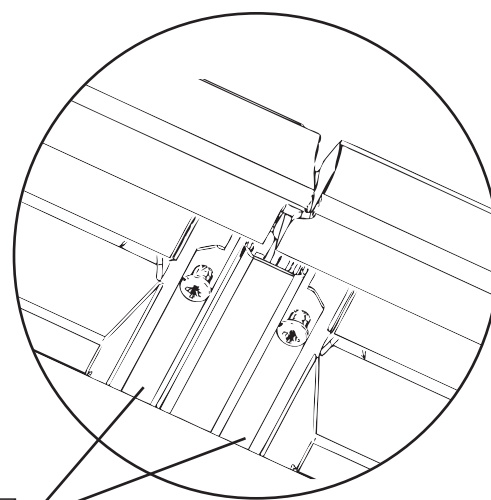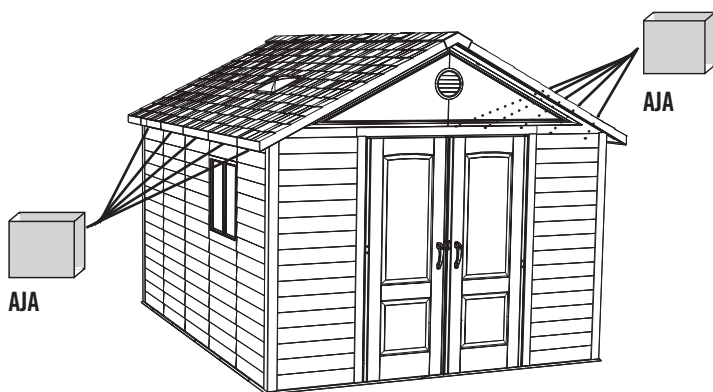


## SEC 13 WINDOW ASSEMBLY & INSTALLATION

### HARDWARE REQUIRED


Hardware shown at actual size




**ADZ** (x8)  
1/4" x 5/8" Pan-Head Screw



**ADW** (x8)  
#10 x 3/4" Pan-Head Screw




**ADX** (x44)  
#10 x 1/2" Pan-Head Screw




**AEE** (x4)  
#10 x 1/2" Flat Washer



**ACF** (x4)  
#10 x 5/16" Pan-Head Screw



**ACB** (x8)  
#10 x 1 1/4" Pan-Head Screw




**ACD** (x4)  
#10 x 3/8" Flat-Head Screw



**ADK** (x4)  
#10 Cap Nut


Hardware shown at 25% of actual size




**AIE** (x4)  
Mounted Window Stay



**AIN** (x4)  
Sliding Window Stay




**AIV** (x4)  
Window Stay Bracket




**AIR** (x8)  
Window Hinge Tube

Hardware shown at 50% of actual size



**AIU** (x8)  
Window Latch Bearing




**AIT** (x8)  
Window Latch

### METAL PARTS REQUIRED

NO METAL PARTS REQUIRED FOR THIS SECTION


### PLASTIC PARTS REQUIRED

Parts shown at 8% of actual size

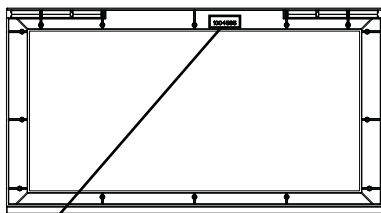

1004595

**AHG** (x4)  
Window Frame

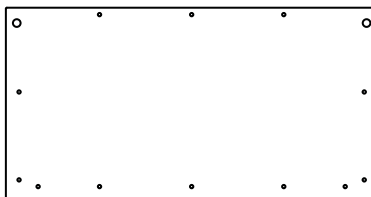


**AHF** (x4)  
Window

### TOOLS REQUIRED





Phillips Screwdriver



Safety Glasses




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



**AIR** (x4)  
(Not to scale)


## SEC 13

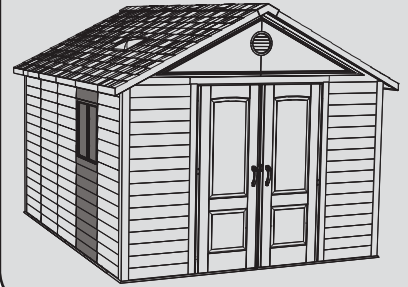

### SEC



### 13.1

Slide **Window Hinge Tubes (AIR)** into the upper and lower hinge holes and fit a **Window Frame (AHG)** over the Hinge Tubes.

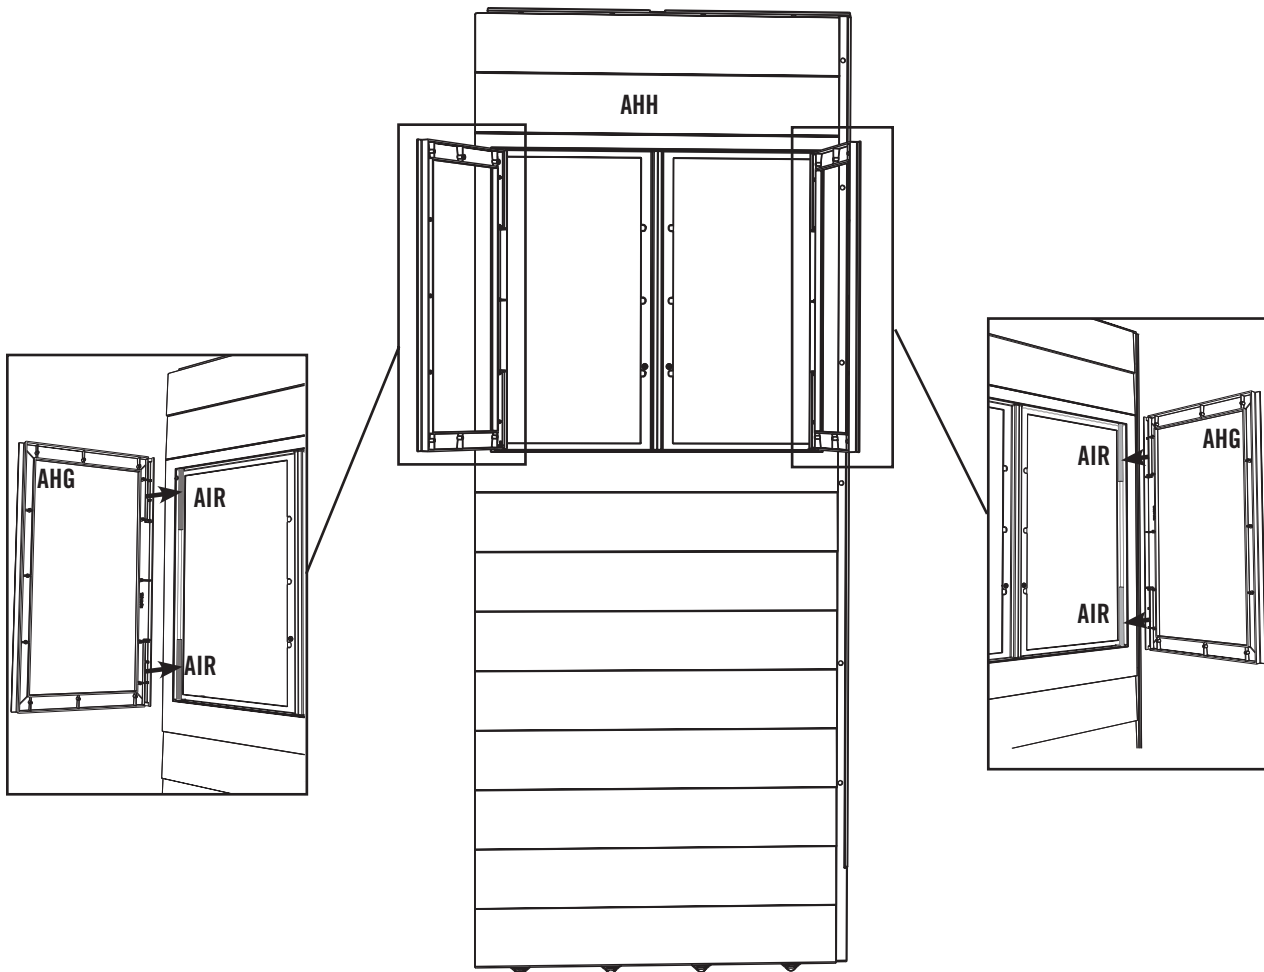




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADX (x20)

SEC 13

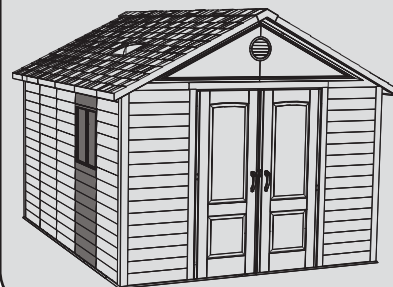



SEC

13.2

Place a **Window (AHF)** onto the Window Frame. Fasten the Window to the Frame with **#10 x 1/2" Pan Head Screws (ADX)** in the locations shown.





*Note: Remove plastic film from both sides of window before installing.*

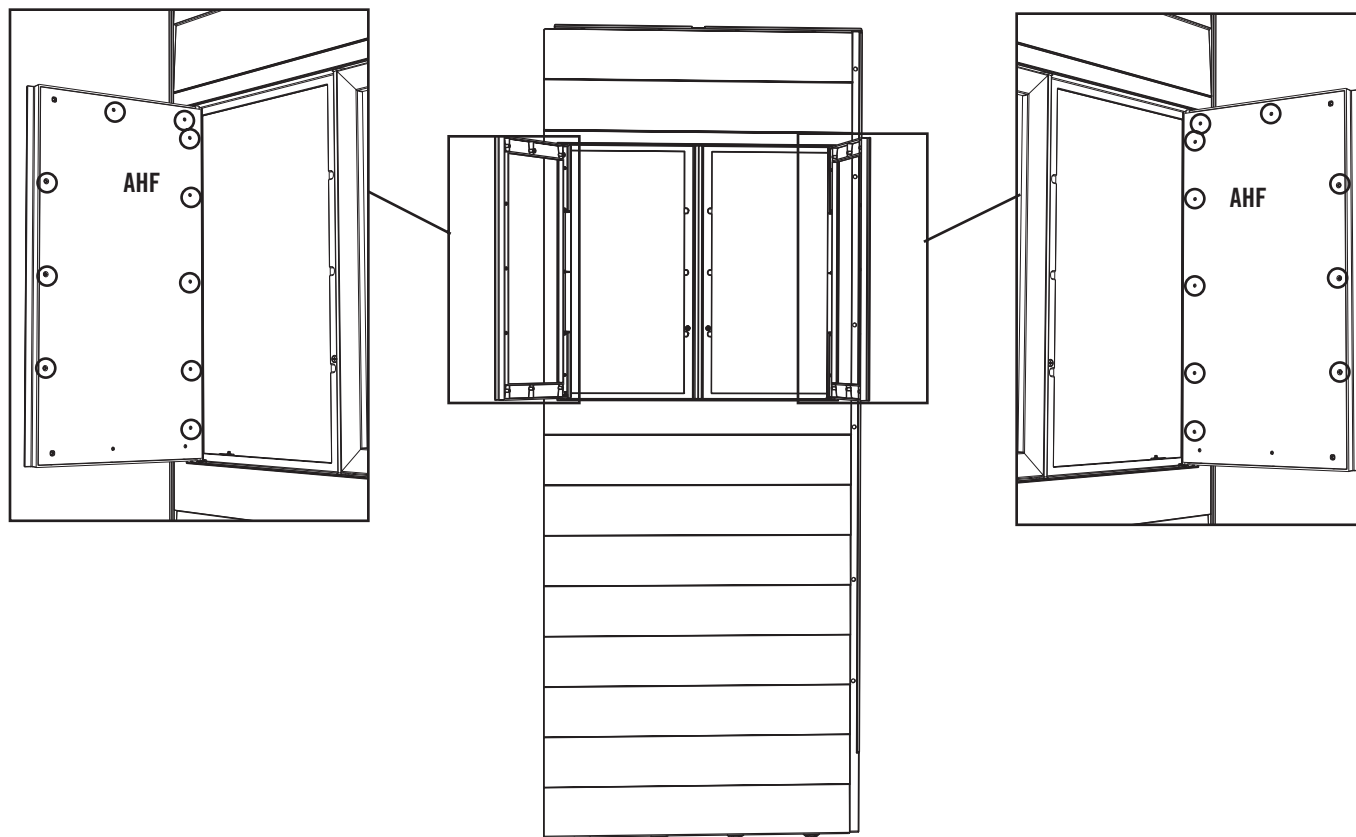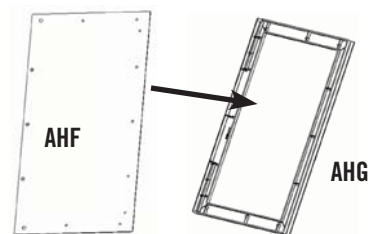


*Note: Insert Screws into the holes with circles.*




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




AIV (x2)  
(Not to scale)




AIE (x2)  
(Not to scale)



ADW (x4)



ADZ (x4)

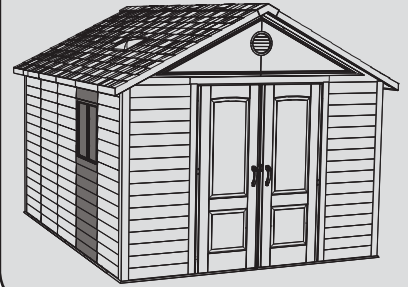


SEC 13

SEC

13.3


Attach **Window Stay Brackets (AIV)** to the inside of the **Window Wall Panel (AHH)**.

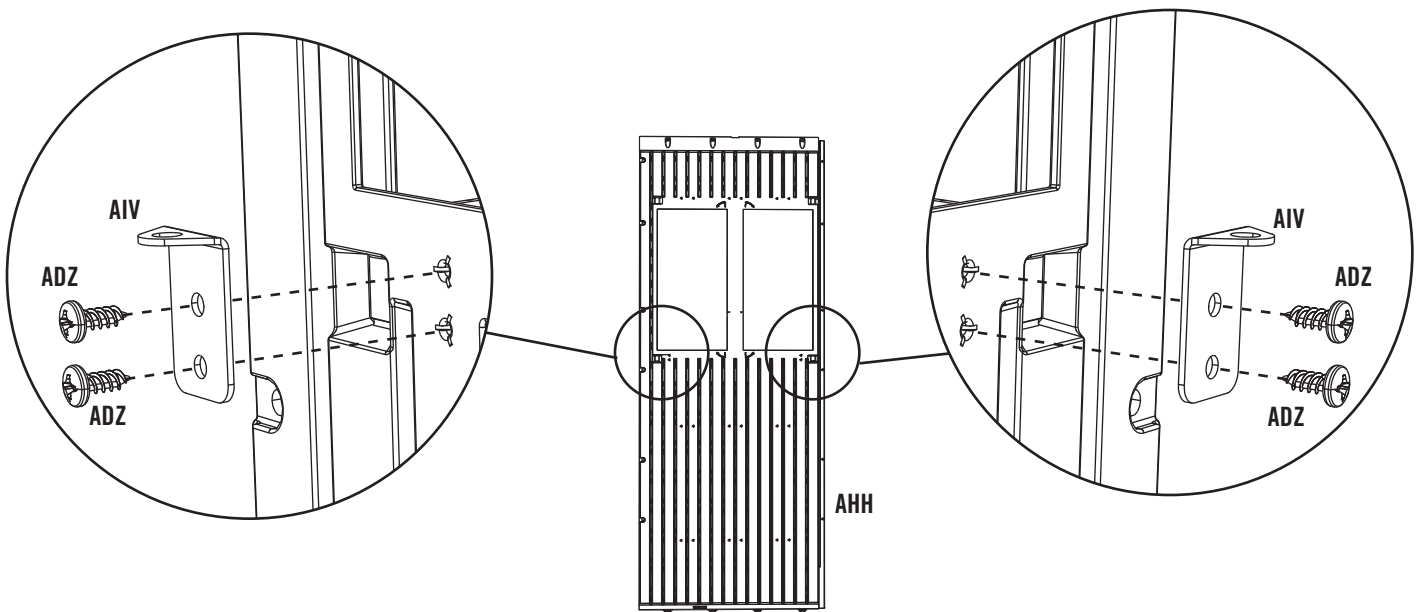

SEC



13.4

Attach a **Mounted Window Stay (AIE)** to the bottom of the Window Frame.

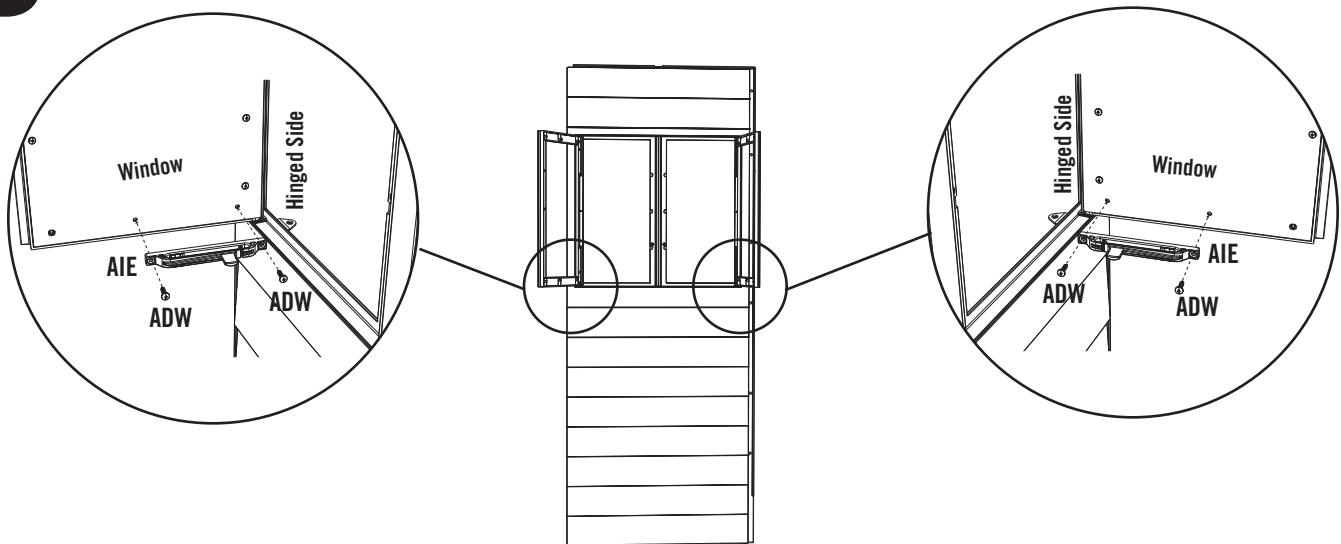




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



AEE (x2)




ADX (x2)



AIN (x2)  
(Not to scale)



ACF (x2)



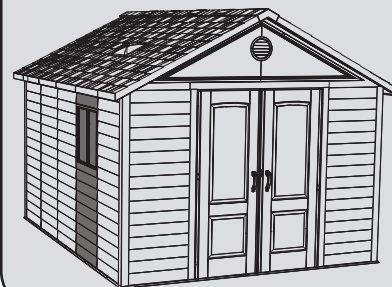


SEC 13

### SEC

#### 13.5




Fit a **Sliding Window Stay (AIN)** into the Mounted Window Stay. To add rigidity to the nub of the Sliding Window Stays, insert **#10 x 1/2" Pan-Head Screws (ADX)** as shown.

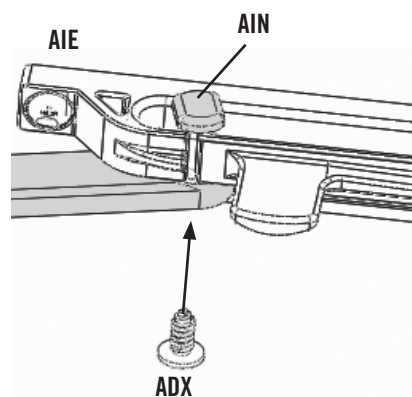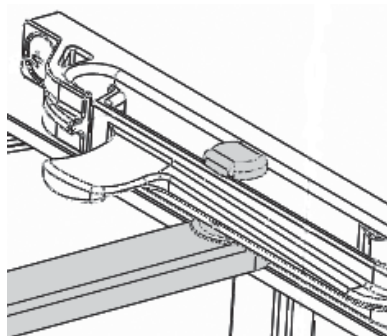

### SEC



#### 13.6

Attach a **Sliding Window Stay (AIN)** to the **Window Stay Bracket (AIV)** using the required hardware.

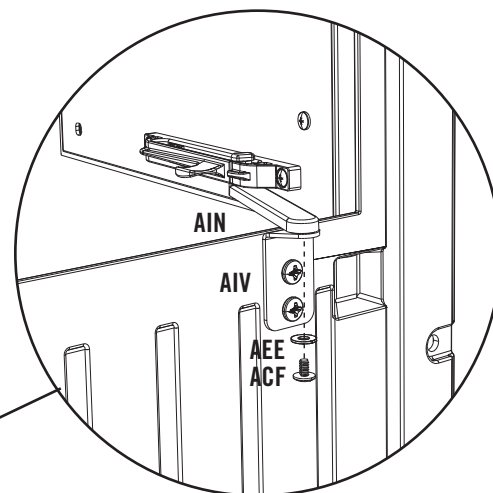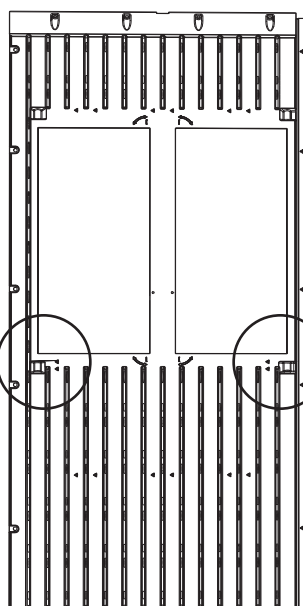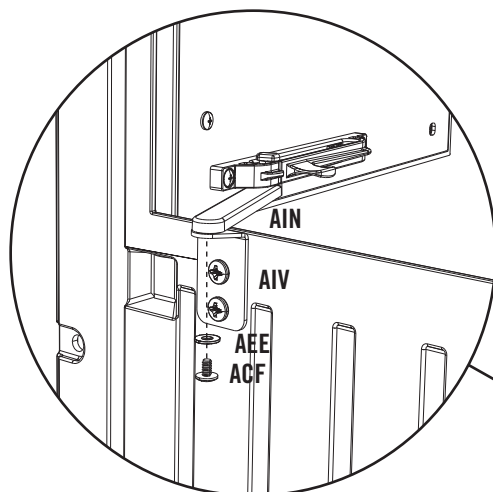





## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



**AIT** (x4)  
(Not to scale)




**AIU** (x4)  
(Not to scale)



**ACB** (x4)

SEC 13

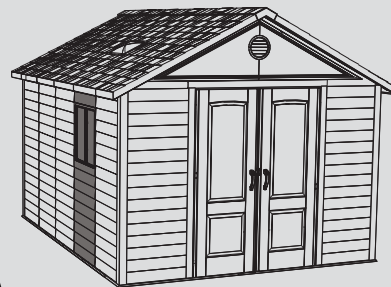





SEC

13.7

Fit a **Window Latch Bearing (AIU)** into a **Window Latch (AIT)**. Attach the Window Latch to the upper latch location with a **#10 x 1 1/4" Pan-Head Screw (ACB)**. Repeat for other Window Latches.





**Note:** Ensure notch in Window Latch Bearing fits over the plastic ridge in the Window Frame.

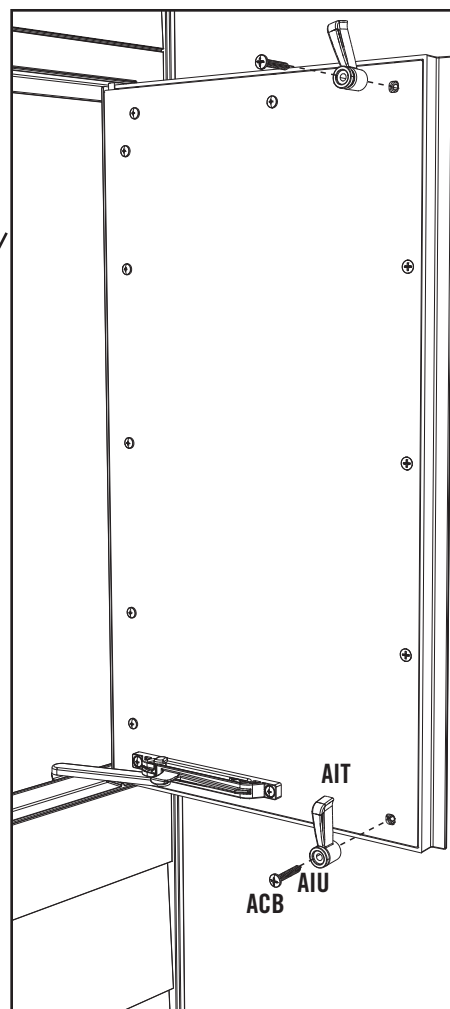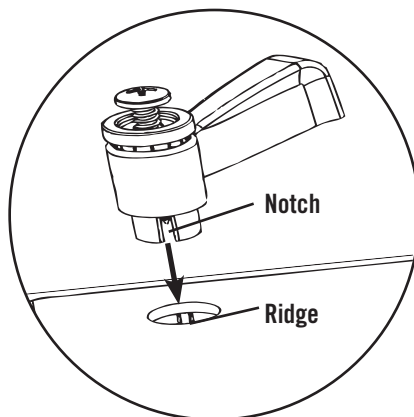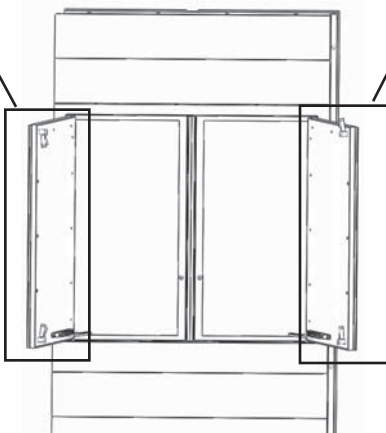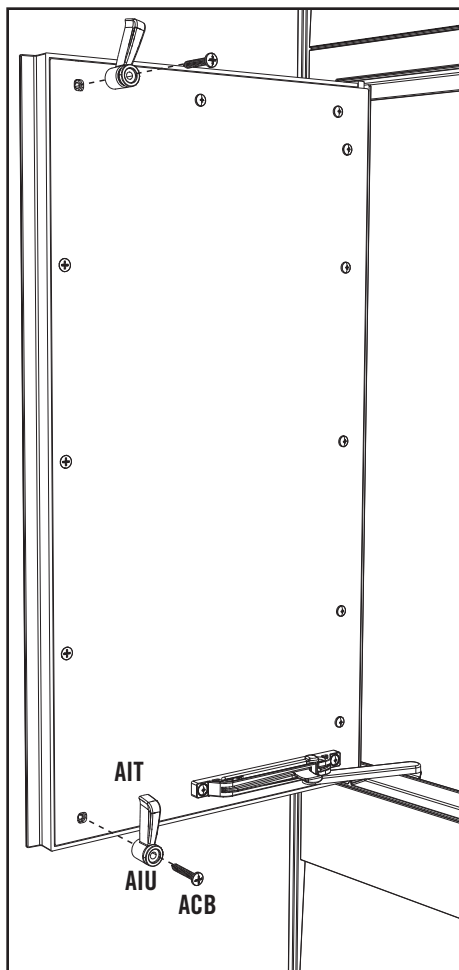





## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




ACD (x4)



ADK (x4)

SEC 13

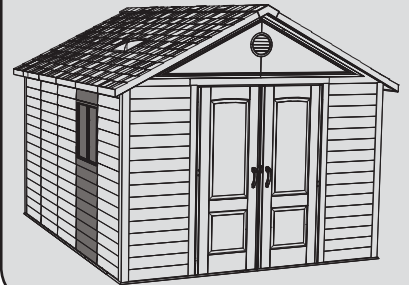


SEC

13.8

### WINDOW ASSEMBLY & INSTALLATION

From the outside, push two (2) **#10 x 3/8" Flat-Head Screws (ACD)** through the holes in the window divider in the Window Wall Panel and the Wall/Shelf Support Channel. Secure with two (2) **#10 Cap Nuts (ADK)**.

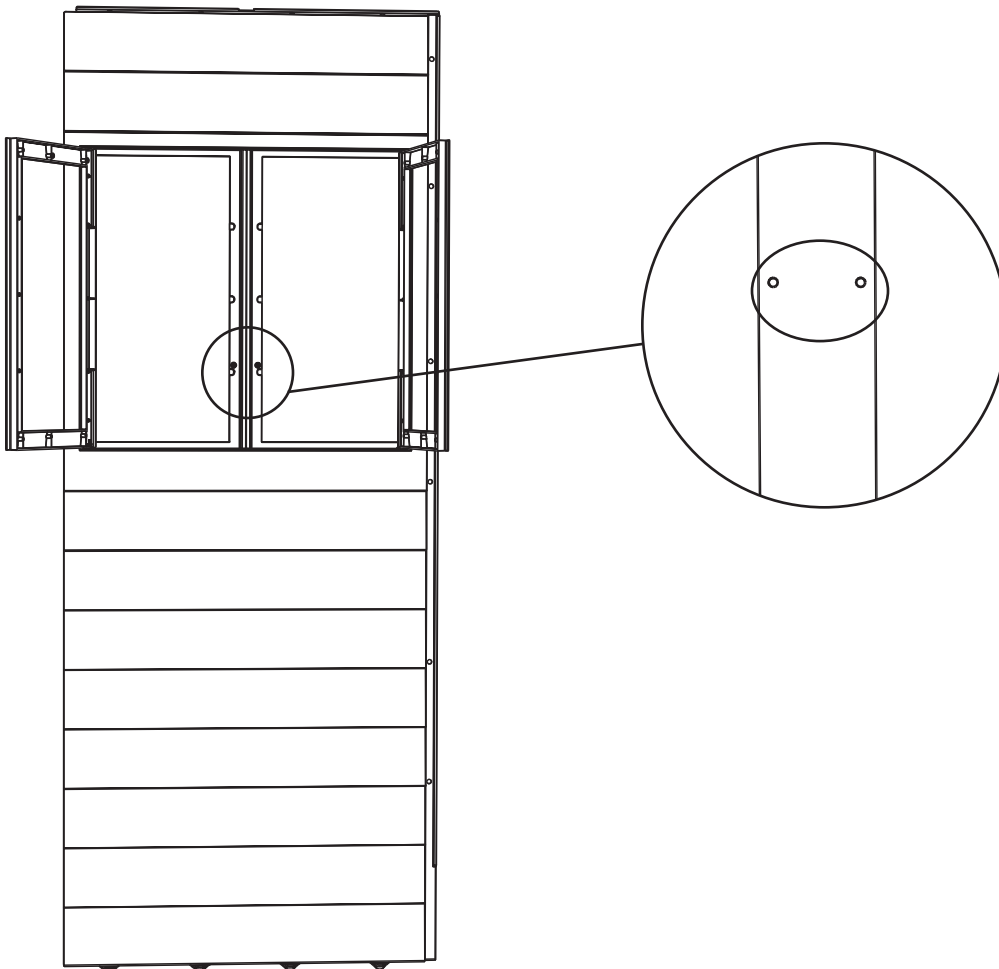

*Note: You will need to push the Screws (ACD) through the thin layer of plastic covering the holes. The Cap Nuts (ADK) go on the inside.*




### WARNING

Do not overtighten the Cap Nut. If the end of the Bolt breaks through the plastic cap, call our Customer Service Department. Exposed threads on the end of the Bolt may cause serious injuries.

## SEC 14 PEGBOARD STRIP INSTALLATION


### HARDWARE REQUIRED

Hardware shown at actual size




**ADW** (x10)  
#10" x 3/4" Pan-Head Screw


Hardware shown at 50% of actual size

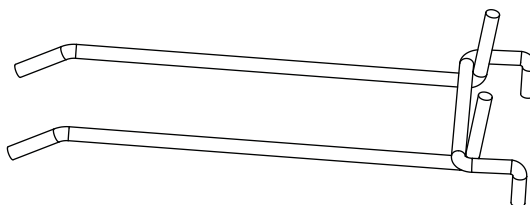


**AIG** (x1)  
4" Double-Arm Hook




**AIJ** (x2)  
Toolholder

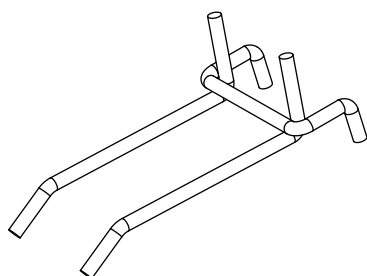

**AIF** (x1)  
2" Double-Arm Hook



**AIH** (x3)  
J-Hook




**AII** (x3)  
L-Hook

### METAL PARTS REQUIRED

NO METAL PARTS REQUIRED FOR THIS SECTION

### PLASTIC PARTS REQUIRED

Parts shown at 15% of actual size




**AFU** (x2)  
Pegboard Strip

### TOOLS REQUIRED



Phillips Screwdriver




Safety Glasses



Level




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADW (x10)

SEC 14

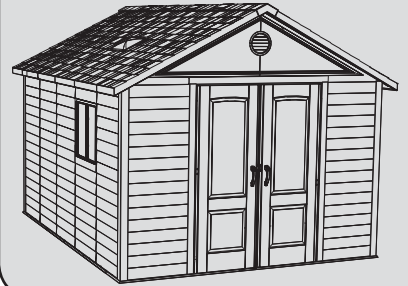

### SEC


#### 14.1

### PEGBOARD STRIP INSTALLATION

Using a level, position the **Pegboard Strip (AFU)** in any desired location along a Wall Panel wall. Screw the Pegboard Strip to the Wall using five (5) **#10 x 3/4" Phillips Pan-Head Screws (ADW)**. See Note. Repeat this step for second Pegboard Strip.



*Note: The Pegboard Strip is screwed directly into the plastic. Line up the Strip anywhere on Wall so holes are over plastic (and not over a groove in the Wall).*

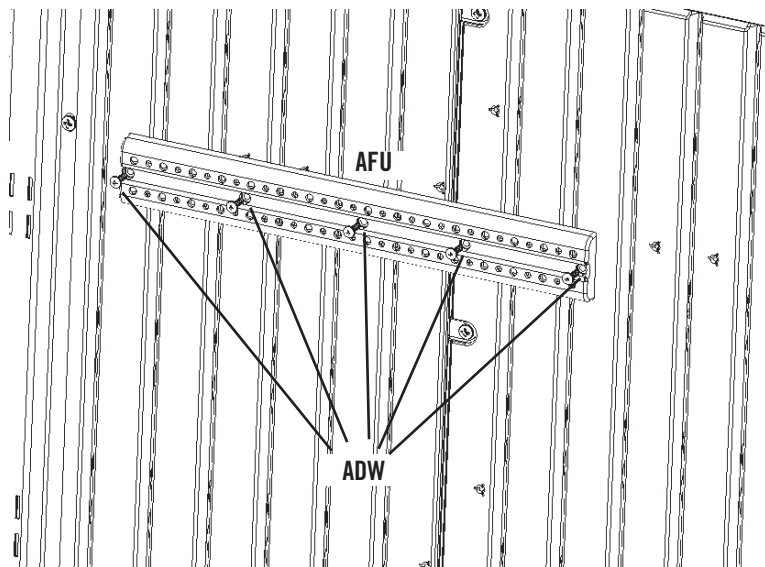

*Note: Ensure the Pegboard Strip is level before inserting Screws.*

### SEC


#### 14.2

Insert **Hooks (AIF, AIG, AIH, AII, and AIJ)**.


## SEC 15 SHELF ASSEMBLY

### HARDWARE REQUIRED

Hardware shown at actual size



**ADX** (x68)  
#10 x 1/2" Pan-Head Screw  
(Not all are used)



**AEE** (x68)  
#10 x 1/2" Flat Washer  
(Not all are used)

### METAL PARTS REQUIRED

Parts shown at 15% of actual size



**AIY** (x10)  
10" Shelf Bracket



**AIZ** (x4)  
14" Shelf Bracket

### PLASTIC PARTS REQUIRED

Parts shown at 4% of actual size



**1002314**

**AFS** (x5)  
10" x 30" Shelf




**1002315**

**AFT** (x2)  
14" x 30" Shelf

### TOOLS REQUIRED



Phillips Screwdriver





Safety Glasses




## PARTS & HARDWARE REQUIRED FOR THIS PAGE


SEC 15



ADX (x28)



AEE (x28)


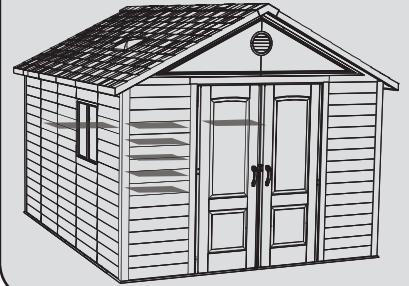


SEC

15.1

### 10" & 14" SHELF ASSEMBLY



Insert the **10" & 14" Shelf Support Brackets (AIY & AIZ)** into the slots of adjacent Wall/Shelf Support Channels. Insert the Shelf Support Brackets at an angle, and then set them straight.

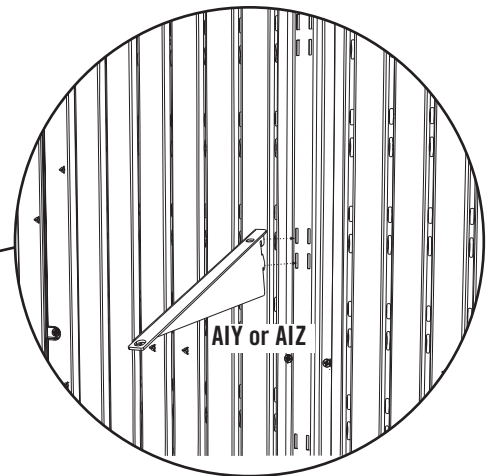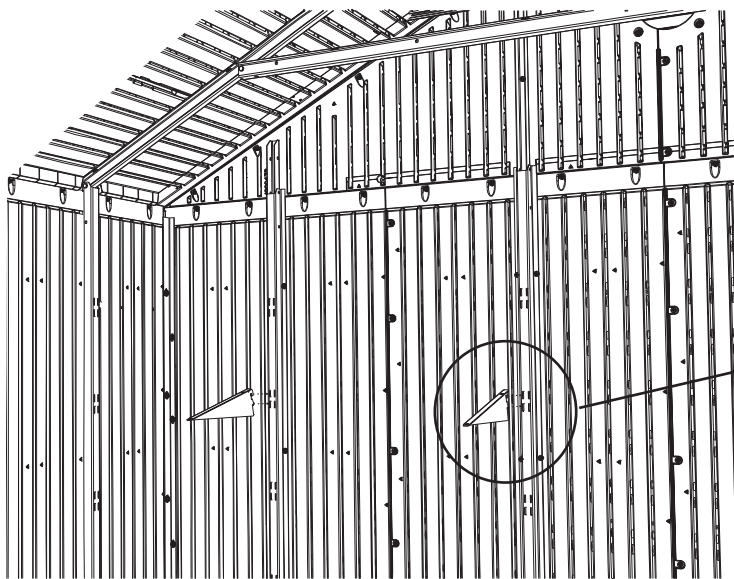

SEC

15.2

Place the **10" x 30"** and **14" x 30"** Shelves (AFS and AFT) on their respective Shelf Support Brackets and fasten them with **#10 x 1/2" Pan-Head Screws (ADX)** and **#10 x 1/2" Flat Washers (AEE)**. Repeat this step for all **10" x 30"** and **14" x 30"** Shelves.

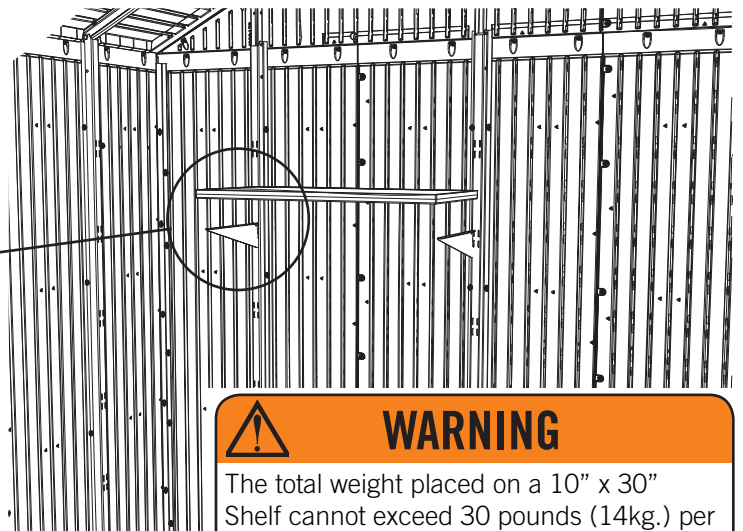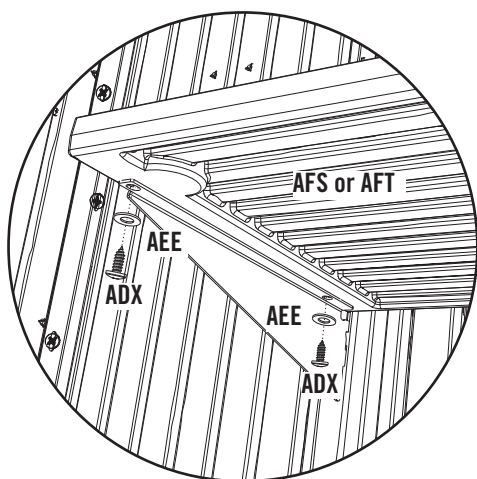


### WARNING

The total weight placed on a 10" x 30" Shelf cannot exceed 30 pounds (14kg.) per Wall Panel.

## SEC 16 FINAL STEPS

### *HARDWARE REQUIRED*

Hardware shown at actual size



**ADZ** (x4)  
1/4" x 5/8" Pan-Head Screws


### *METAL PARTS REQUIRED*

**NO METAL PARTS REQUIRED FOR THIS SECTION**

### *PLASTIC PARTS REQUIRED*

**NO PLASTIC PARTS REQUIRED FOR THIS SECTION**



### *TOOLS REQUIRED*



**Safety Glasses**




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x4)

SEC 16

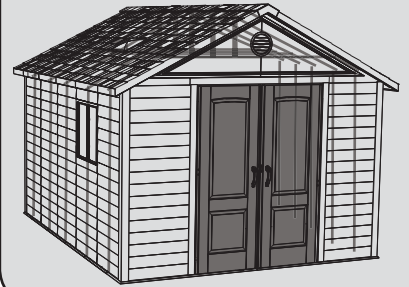


### SEC

#### 16.1


### DOOR SPACING ADJUSTMENT

You may need to move the tops and/or bottoms of the doors to eliminate uneven gaps. Loosen the Carriage Bolts at the four corners of the Door Frame. Loosen all screws in the left and right Door Hinges by a half a turn. Move Doors until gaps are even. Re-tighten all hardware. After all hardware has been retightened, secure the hinges to the Floor using four (4) **1/4" x 5/8" Pan-Head Screws (ADZ)**.


Loosen the Screws in both Hinges before adjusting Doors.

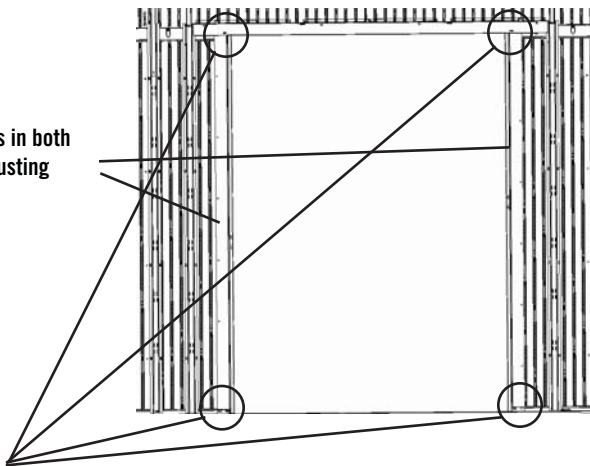

Loosen these Carriage Bolts before adjusting Doors.

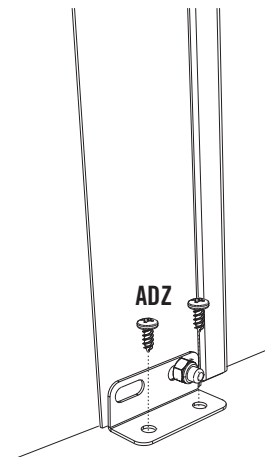

Right Door Hinge

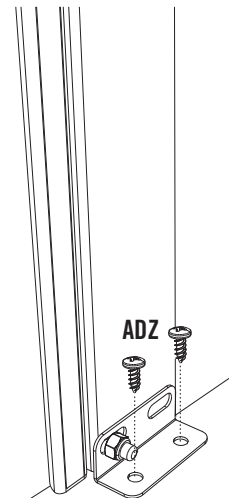

Left Door Hinge


### SEC

#### 16.2

### ANCHORING THE SHED

If you plan on anchoring your shed, you can anchor it to your platform through the Floor Brackets at the bottom of each Wall/Shelf Support Channel. The anchoring hardware used depends on the platform. If you have a concrete platform, we recommend using fourteen (14) **3/8" Anchor Bolts** and fourteen (14) **3/8" x 1" Flat Washers**. If you have a wood framed platform, we recommend using fourteen (14) **3/8" Lag Bolts** and fourteen (14) **3/8" x 1" Flat Washers**. Do not exceed a **3/8"** diameter bolt. Refer to your local hardware store for this hardware.

Insert Anchoring Hardware through the Floor Brackets attached to the bottom of each Wall Support and the Hinges.

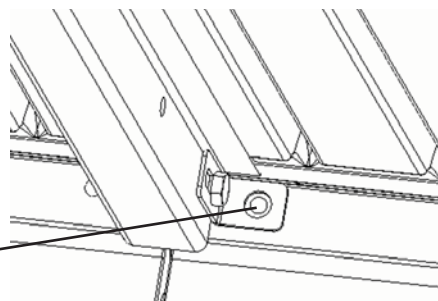



## ***CLEANING & CARE***

Congratulations on your Lifetime® Outdoor Shed purchase. By following the instructions below, your new Lifetime shed should provide you with years of service and enjoyment.

### **Cleaning and Care**

The polyethylene walls and shelves are stain- and solvent resistant. Most stains can be removed, using a mild soap and a soft-bristled brush. Abrasive cleaning materials may scratch the plastic and are not recommended. Repair scratches or rust spots on the metal by sanding the affected area lightly; using a rust preventative spray primer; and finally, spraying with a high-gloss spray enamel paint. Avoid placing a direct heat source on or near surfaces unless using a heat barrier.

## **LIFETIME OUTDOOR SHED EQUIPMENT**

### **10-YEAR LIMITED FACTORY WARRANTY**

**THE MANUFACTURER RESERVES THE RIGHT TO MAKE SUBSTITUTIONS TO WARRANTY CLAIMS IF PARTS ARE UNAVAILABLE OR OBSOLETE.**

1. Lifetime outdoor sheds are warranted to the original purchaser to be free from defects in material or workmanship for a period of ten years from the date of original retail purchase. The word "defects" is defined as imperfections that impair the use of the product. Defects resulting from misuse, abuse or negligence will void this warranty. This warranty does not cover defects due to improper installation, alteration or accident. This warranty does not cover damage caused by vandalism, rusting, "acts of nature" or any other event beyond the control of the manufacturer.
2. This warranty is nontransferable and is expressly limited to the repair or replacement of defective product. If the product is defective within the terms of this warranty, Lifetime Products, Inc. will repair or replace defective parts at no cost to the purchaser. Shipping charges to and from the factory are not covered and are the responsibility of the purchaser. Labor charges and related expenses for removal, installation or replacement of the shed or its components are not covered under this warranty.
3. This warranty does not cover scratching or scuffing of the product that may result from normal usage. In addition, defects resulting from intentional damage, negligence, unreasonable use or hanging from the truss will void this warranty.
4. Liability for incidental or consequential damages is excluded to the extent permitted by law. While every attempt is made to embody the highest degree of safety in all equipment, freedom from injury cannot be guaranteed. The user assumes all risk of injury resulting from the use of this product. All merchandise is sold on this condition, and no representative of the company may waive or change this policy.
5. This product is not intended for institutional or commercial use; Lifetime Products, Inc. does not assume any liability for such use. Institutional or commercial use will void the warranty.
6. This warranty is expressly in lieu of all other warranties, expressed or implied, including warranties of merchantability or fitness for use to extent permitted by Federal and state law. Neither Lifetime Products, Inc., nor any representative assumes any other liability in connection with this product. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

**ALL WARRANTY CLAIMS MUST BE ACCOMPANIED BY A SALES RECEIPT.**

**REPORT PRODUCT DEFECTS IN WRITING TO:**

Lifetime Products, Inc., PO Box 160010 Clearfield, UT 84016-0010  
or call (800) 225-3865 M-F 7 a.m. to 5 p.m. MST.

**Please include your dated sales receipt and photographs of damaged parts.**

**To register the product, visit our Web site at [www.lifetime.com](http://www.lifetime.com)**



[www.lifetime.com](http://www.lifetime.com)

©2004 Lifetime Products, Inc.

PO Box 160010 • Freeport Center, Bldg. D-11 Clearfield, Utah 84016-0010  
T: 800-225-3865 • F: 801-728-1907

**ENHANCE YOUR LIFETIME® PURCHASE BY ADDING ACCESSORIES OR OTHER GREAT PRODUCTS**

---

*To purchase accessories or other Lifetime Products, visit us at:*

***[www.lifetime.com](http://www.lifetime.com)***

***Or call: 1-800-424-3865***

---

